



ProTools 60 Linear Perimeter Recessed Wet Location

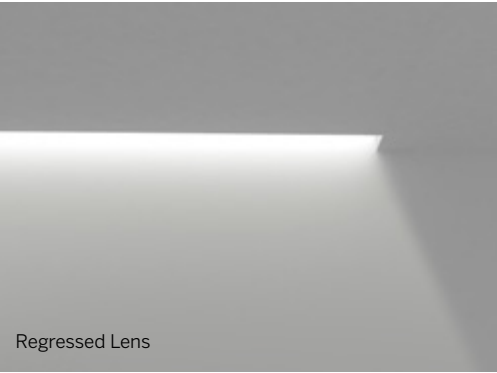

2.4" aperture recessed linear perimeter lensed fixture with regressed lens for use in wet locations compatible with all ceiling types. Evenly illuminated lens provides consistent illumination for highlighting perimeter walls.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts and lenses Standard and tailored lengths including corner configurations Finishes: white, black, silver and custom
Integration	Fixation into gypsum, hard ceilings and all grid ceiling types Finished wall continues past the ceiling line
Distribution	Evenly illuminated regressed, recessed lens
LED	Constant Voltage, 90+ CRI, 3 Steps MacAdam, 6 W per foot L70 lifetime (TM21 Projected 85C) Static White (2700K-4000K) = 60,000 hours
Optic	ROL - Regressed Opal Acrylic Lens evenly illuminated line of light
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry, damp and wet location, CE, Chicago Plenum
Voltages	120-277VAC



Wet Location (-WL)
Regressed Opal Lens (ROL)

ProTools 60 Linear Perimeter Recessed Wet Location

Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ¹	Driver ²	Housing Finish	Options
WG-60PTLP-WL	RPT RBT	S	24 48 96 XX	927 930 935 940	ROL	105	M	X S D010 DPH L3DAE L3DOE EL96 DALI DMX	W (std) B S F	AWNRF BT CP EM

Model WG-60PTLP-WL = ProTools 60 Linear Perimeter Wet Location	Driver (remote)² - X = No driver, ordered separately - S = Standard, non-dim driver 120-277V - D010 = eldoLED, 10%, 0-10V dimming, 120-277V - DPH = Phase Dimming, 1% dimming, 120V only - L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V - L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V - EL96 = eldoLED, 24V, 0.1% 0-10V Dimming - DALI = eldoLED DALI (DT6), 0.1% dimming (120-277V) - DMX = eldoLED, 24V, 0.1% DMX Dimming
Fixation - RPT = Recessed plaster trim - RBT = Recessed trim for hard ceiling	Housing / Trim Finish - W = White, 15% gloss, RAL 9003 (standard) - B = Black, 15% gloss, RAL 9005 - S = Silver, 15% gloss, RAL 9006 - F = Custom finished trim, specify RAL
Pattern S = Straight run	Options - AWNRF = Lutron Athena Wireless Node RF (specify with D010, EL96 or DALI) - BT = Wireless CAS – Casambi (specify with D010, EL96, DALI or DMX) - CP = Chicago Plenum rated, complies with CCEA requirements - EM = Emergency
Length 24 = 24" 48 = 48" 96 = 96" - XX = Specify inches to the nearest 2.5"	
CRI/CCT (90+ CRI) 927 = 2700K 930 = 3000K 935 = 3500K 940 = 4000K	
Optic ROL = Regressed opal lens	
Beam 105 = 105°	
Power¹ M = 6 W/ft	

