

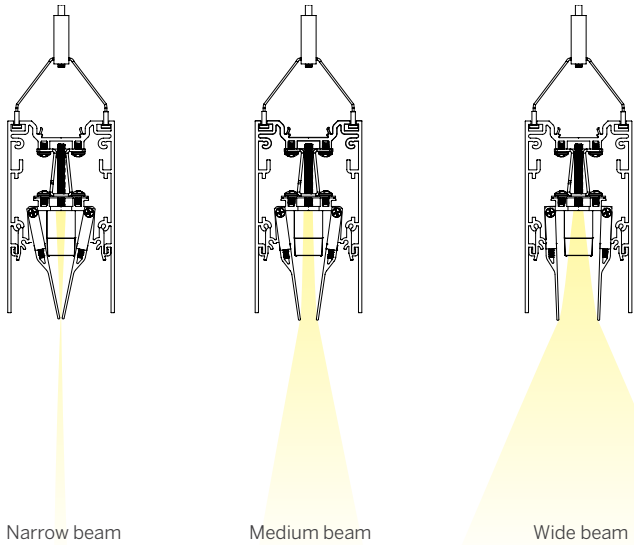


ProTools 60 Linear Studio Downlight Suspended / Surface Mount

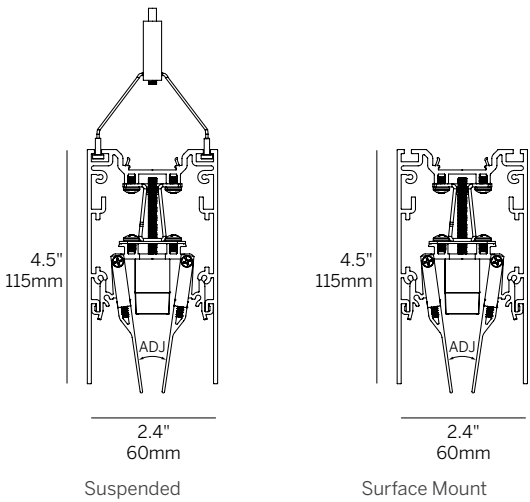

2.4" aperture surface mount or suspended luminaire for environments that require precise light distribution and no glare.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Field adjustable suspension height and position Perfect fit with inserts, louvers and baffles Standard and tailored lengths Finish: matte black
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	45 degree louver with adjustable baffles
LED	Static White, 2700K - 6500K, 3 W - 10 W/ft, constant current, >90 CRI, 3-Step MacAdam L70 (TM21 Projected 85°C) Static White = 50,000 hours
Optic	LL45B - Linear Louver Black extreme cutoff
Reflector	Black: no brightness Adjustable baffles
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	5lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

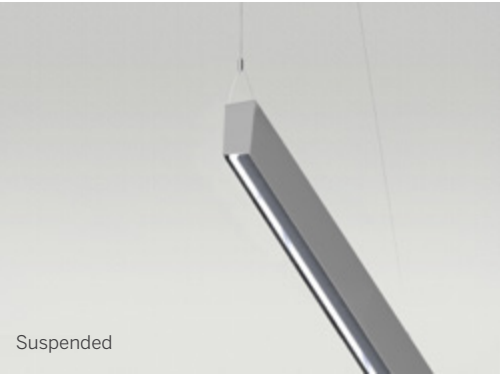

ProTools 60 Linear Studio Downlight Suspended / Surface Mount

Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ¹	Driver ²	Housing Finish	Reflector Finish	Options
WG-60PTL-ST	S48 S96 SXX SM	S	48 72 96 XX	927 930 935 940 965	LL45B	ADJ	P1 P2 P3	E1 L1 D2DT6	B	B	AWNRF BT EM

Model

- WG-60PTL-ST = ProTools 60 Linear Studio Downlight

Fixation

Power suspension w/5" canopy standard. Black non-feed suspensions provided with 2" canopy.

- S48 = 48" suspension cable
- S96 = 96" suspension cable
- SXX = Specify suspension cable length to nearest 0.25"
- SM = Surface Mount

Pattern

- S = Straight run

Length

- 48 = 48"
- 72 = 72"
- 96 = 96"
- XX = Specify in 0.5" increments

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- 965 = 6500K

Optic

- LL45B = Linear louver black

Beam

- ADJ = Adjustable baffles

Power¹

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft

Driver (Integral)²

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)

Housing Finish


- B = Black, 15% gloss, RAL 9005 (standard)

Reflector Finish

- B = Black, 15% gloss, RAL 9005 (standard)

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1 or D2DT6) (SM Remote)
- BT = Wireless CAS – Casambi (specify with E1 or D2DT6) (Remote)
- EM = Emergency

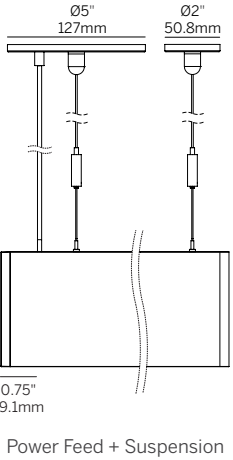

Notes
1 Refer to specsheet for delivered lumen data for all product configurations.
2 See power supply page for details.

