


ProTools 60 Linear Wall Graze Recessed



2.4" aperture recessed linear perimeter wall grazer with flush faceplate and recessed optic compatible with all ceiling types for grazing walls up to 30' high. Recessed optic allows finished wall to continue past ceiling plane while optic provides grazing light to highlight textured surfaces. *Soft Graze* bracket option provides additional offset when needed.


|                |                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing        | Precision extruded aluminum for true dimensions and tolerances<br>Toolless component assembly from below<br>Perfect fit with inserts, louvers and lenses<br>Standard and tailored lengths including corner configurations<br><i>Soft Graze</i> adds 1" - 3" additional set-off for less dramatic graze<br>Recessed snap-in cover for non-illuminated section<br>Finishes: white, black, silver and custom |
| Integration    | Fixation into gypsum, hard ceilings and all grid ceiling types<br>Finished wall continues past the ceiling line                                                                                                                                                                                                                                                                                           |
| Distribution   | Wall Graze and <i>Soft Graze</i>                                                                                                                                                                                                                                                                                                                                                                          |
| LED            | Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam<br>Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI<br>L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours                                                                                                                                              |
| Optic          | RLW/RLB - Recessed Louver White (W) or Black (B)   extreme cutoff<br>REO - Recessed Elliptical Optic - high efficiency graze                                                                                                                                                                                                                                                                              |
| Reflector      | White: high efficiency (standard with RLW)<br>Black: no brightness (standard with RLB)<br>Silver: low brightness<br>All 15% gloss<br>Custom finish available                                                                                                                                                                                                                                              |
| Driver         | Compatible with quality constant current drivers                                                                                                                                                                                                                                                                                                                                                          |
| Connectivity   | Lutron Athena Wireless Node RF<br>Casambi BlueTooth                                                                                                                                                                                                                                                                                                                                                       |
| Weight         | 4lbs per foot                                                                                                                                                                                                                                                                                                                                                                                             |
| Operating Temp | Suitable for operation in maximum ambient temperature of 35C (95F)                                                                                                                                                                                                                                                                                                                                        |
| Warranty       | 5-year Limited (see complete company warranty information)                                                                                                                                                                                                                                                                                                                                                |
| Certifications | ETL and ETL-C for dry and damp location, CE, Chicago Plenum                                                                                                                                                                                                                                                                                                                                               |
| Voltages       | 120-277VAC                                                                                                                                                                                                                                                                                                                                                                                                |

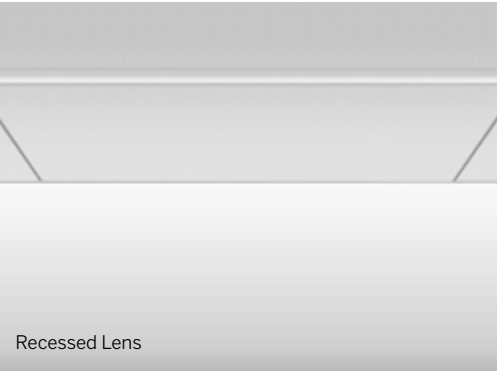

Recessed Lens



Recessed Louver

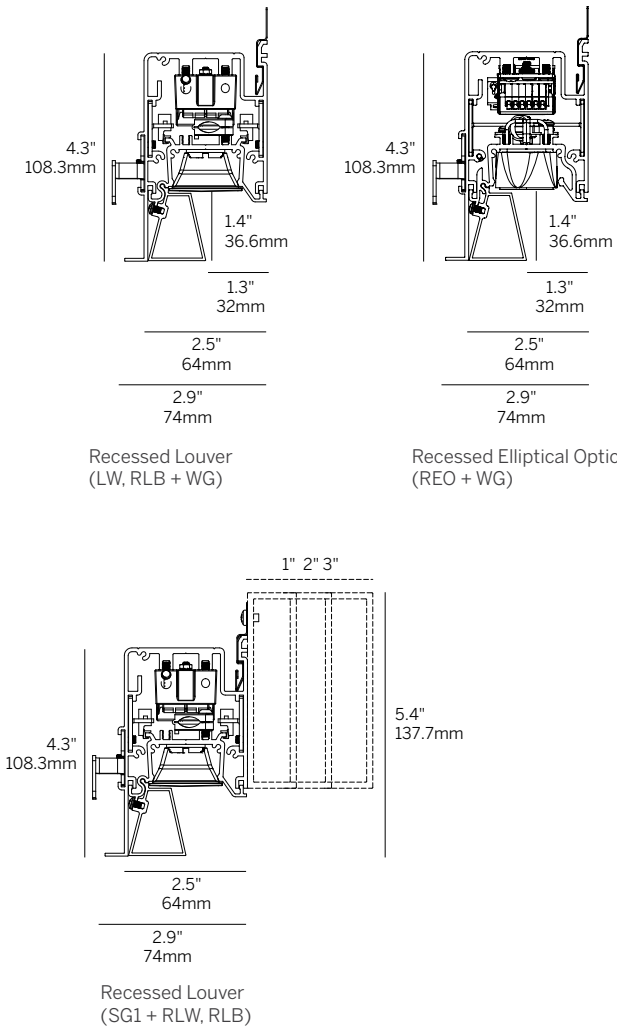

ProTools 60 Linear Wall Graze Recessed

| Model       | Fixation | Pattern         | Length <sup>2</sup> | CRI/CCT                 | Optic <sup>3</sup> | Beam | Power <sup>4</sup> | Driver <sup>5</sup> | Housing Finish | Options         |
|-------------|----------|-----------------|---------------------|-------------------------|--------------------|------|--------------------|---------------------|----------------|-----------------|
| WG-60PTLWG  | RPT      | S               | 24                  | 927                     | RLW                | WG   | P1                 | E1                  | W (std)        | AWNRF           |
| WG-60PTLSG1 | RBT      | PI <sup>1</sup> | 48                  | 930                     | RLB                |      | P2                 | L1                  | B              | BT              |
| WG-60PTLSG2 | RGT9     | PO <sup>1</sup> | 96                  | 935                     | REO                |      | P3                 | D2DT6               | S              | CP              |
| WG-60PTLSG3 | RGT15    |                 | XX <sup>3</sup>     | 940<br>TW1840<br>TW2765 |                    |      | P4                 | D2DT8               | F              | NYC<br>TF<br>EM |

**Model**

- WG-60PTLWG = ProTools 60 Linear Wall Graze
- WG-60PTLSG1 = ProTools 60 Linear *Soft Graze* 1" extension
- WG-60PTLSG2 = ProTools 60 Linear *Soft Graze* 2" extension
- WG-60PTLSG3 = ProTools 60 Linear *Soft Graze* 3" extension

**Fixation**

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid

**Pattern**

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane<sup>1</sup>
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane<sup>1</sup>

**Length<sup>2</sup>**

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"<sup>3</sup>

**CRI/CCT (90+ CRI)**

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K

**Optic<sup>3</sup>**

- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- REO = Recessed elliptical optic

**Beam**

- WG = Wall Graze

**Power<sup>4</sup>**

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft

**Driver (Integral)<sup>5</sup>**


- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

**Housing / Trim Finish (Includes kick reflector)**

- W = White, 15% gloss, RAL 9003 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 (standard with RLB)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

**Options**

- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8)
- CP = Chicago Plenum rated, complies with CCEA requirements
- NYC = 6' whip per run
- TF = Top feed
- EM = Emergency

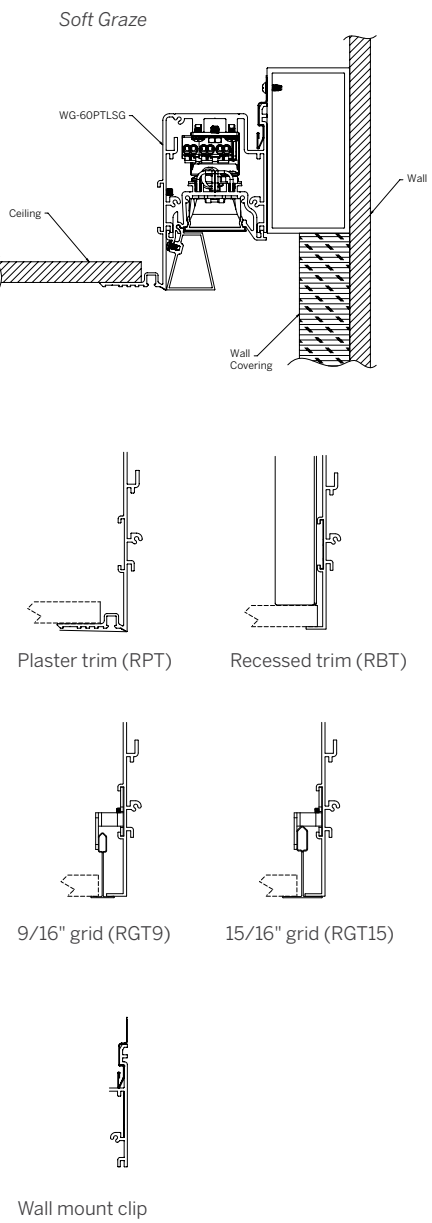

Whitegoods reserves the right to change any information without prior notice.

**Notes**

- See pattern spec sheet.
- Individual fixture lengths less than 2' may require remote driver.
- Specify Lensed products to nearest 0.25". Specify Louvered and Tunable White products in 3" increments for continuous light. Louver supplied in 3" increments, balance of the run will have recessed blank covers on ends.
- Refer to specsheet for delivered lumen data for all product configurations.
- See power supply page for details.