

ProTools 60 Linear Wall Wash

6" / 12" Recessed



inter•lux





Contents

- 1 overview
- 2 specifications / configurator
- 3 photometry



2.4" aperture recessed linear (6" or 12" length) wall washer with flush faceplate and recessed lens compatible with all ceiling types.

- 2.4" aperture, integrated solution that is compatible with all ceiling types.
- Standard and tailored run lengths, including corners.
- Wash to 30' wall height.
- Modularity of insert modules for ultimate design flexibility.
- Consistent LED technology throughout the Whitegoods product range.
- Evenly illuminate the wall from top to the bottom with smooth gradation.
- Flicker-free full range dimming with standard driver (Eldoled).
- Efficacy up to 87 lumens per watt (delivered) @ 3000K, see photometry page for details.
- L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours.
- ETL and ETL-C for dry and damp location.

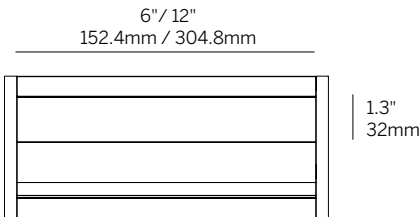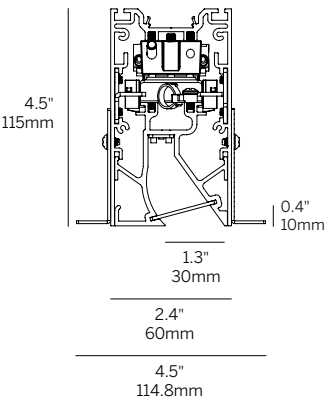

Recessed Lens + Wall Wash
(LML + WW)

Plaster Trim Cutout
Width: 3" / Length: fixture length + 1/2"
Ex: 96" fixture = 96 1/2" cutout length

Bezel Trim Cutout
Width: 2 7/8" / Length: fixture length + 1/8"
Ex: 96" fixture = 96 1/8" cutout length

ProTools 60 Linear Wall Wash

6" / 12" Recessed

inter•lux

Ordering Information

WG-60PTLWW		S			LML	WW					
Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ¹	Driver ²	Housing Finish	Reflector Finish	Options
WG-60PTLWW	RPT RBT	S	6 12	927 930 935 940 TW1840 TW2765	LML	WW	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W S F	AWNRF BT CP NYC TF EM

Model

- WG-60PTLWW = ProTools 60 Linear Wall Wash

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling

Pattern

- S = Straight run

Length²

- 6 = 6"
- 12 = 12"

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K

Optic

- LML = Linear micro-prismatic lens

Beam

- WW = Wall Wash

Power¹

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft

Driver (Remote)²

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

Housing / Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Reflector Finish

- W = White, 15% gloss, RAL 9003
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8)
- CP = Chicago Plenum rated, complies with CCEA requirements
- NYC = 6' whip per run
- TF = Top feed
- EM = Emergency (remote)

1 See photometric data sheet for delivered lumens.

2 See power supply page for details.

ProTools 60 Linear Wall Wash

6" / 12" Recessed

inter•lux

WG-60PTL-...-LML-WW-...-W-W

Delivered Lumens Per Foot

		Power			
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
cct	927	268	504	774	1141
	930	279	524	806	1188
	935	289	543	836	1244
	940	297	558	858	1278
UGR ¹		31.1	33.3	34.8	36.1


Power Multiplier				
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
9XX	0.25	0.46	0.70	1.00

TW1840				
1800K	0.15	0.29	0.46	0.65
4000K	0.24	0.47	0.75	1.06

TW2765				
2700K	0.23	0.45	0.71	1.00
6500K	0.24	0.47	0.74	1.05

CCT Multiplier			
927	930	935	940
0.97	1.00	1.03	1.06


1 UGR value noted is the maximum UGR (crosswise) with 930 LEDs at noted Power level.



BEAM ANGLE (0-180) = 57.8
BEAM ANGLE (90-270) = 102

WG-60PTLWW-12IN-S-930-LML-WW-P4

10'-0" ceiling height

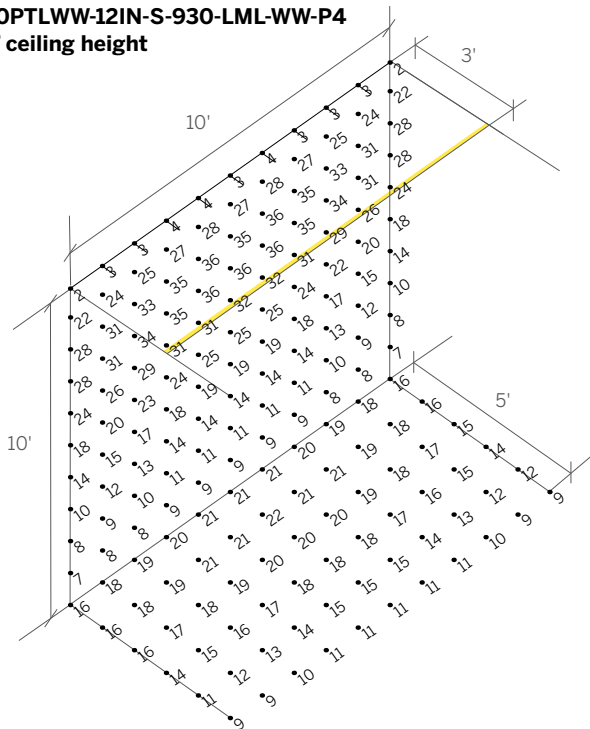

Surface reflectances:

80% Ceiling
50% Wall
20% Floor

Illuminance points are spaced 1'-0" on center.
Illuminance values are shown in units of foot-candles.