


ProTools 60 Linear Wall Wash

6" / 12" Surface Mount




Contents

1	overview
2	specifications / configurator
3	photometry

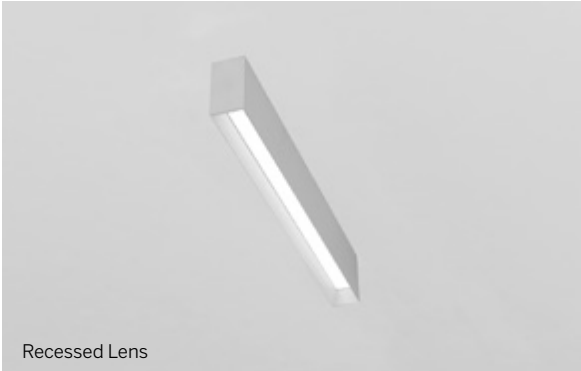


2.4" aperture recessed linear wall washer (6" or 12" length) with flush faceplate and recessed lens compatible with all ceiling types.

- 2.4" aperture, integrated solution compatible with all ceiling types.
- Extreme brightness control and the elimination of disturbing glare.
- Modularity of insert modules for ultimate design flexibility.
- Consistent LED technology throughout the Whitegoods product range.
- Flicker-free full range dimming with standard driver (Eldoled).
- Efficacy up to 87 lumens per watt (delivered) @ 3000K, see photometry page for details.
- L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours.
- ETL and ETL-C for dry and damp location.

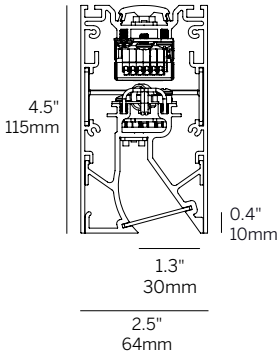

Recessed Lens + Wall Wash
(LML + WW)

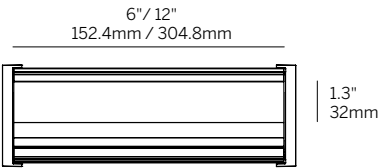

ProTools 60 Linear Wall Wash

6" / 12" Surface Mount

inter•lux

Ordering Information											
WG-60PTLWW	SM	S			LML	WW					
Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ¹	Driver ²	Housing Finish	Reflector Finish	Options
WG-60PTLWW	SM	S	6 12	927 930 935 940 TW1840 TW2765	LML	WW	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W S F	AWNRF BT WCY EM

Model

- WG-60PTLWW = ProTools 60 Linear Wall Wash

Fixation

- SM = Surface Mount

Pattern

- S = Straight run

Length

- 6 = 6"
- 12 = 12"

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K

Optic

- LML = Linear micro-prismatic lens

Beam

- WW = Wall Wash (LML)

Power¹

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft

Driver (Remote)²

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

Housing Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Reflector Finish

- W = White, 15% gloss, RAL 9003 (standard with RLW)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8)
- WCY = Wood ceiling yoke
- EM = Emergency (remote)

1 See photometric data sheet for delivered lumens.

2 See power supply page for details.

ProTools 60 Linear Wall Wash

6" / 12" Surface Mount

WG-60PTLWW-...-SM-12-LML-WW-...-W-W

Delivered Lumens Per Foot

CCT	Power			
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
927	268	504	774	1141
930	279	524	806	1188
935	289	543	836	1244
940	297	558	858	1278
UGR ¹	31.1	33.3	34.8	36.1

Power Multiplier

	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
9XX	0.25	0.46	0.70	1.00

TW1840

1800K	0.15	0.29	0.46	0.65
4000K	0.24	0.47	0.75	1.06


TW2765

2700K	0.23	0.45	0.71	1.00
6500K	0.24	0.47	0.74	1.05

CCT Multiplier

927	930	935	940
0.97	1.00	1.03	1.06


¹ UGR value noted is the maximum UGR (crosswise) with 930 LEDs at noted Power level.



BEAM ANGLE (0-180) = 57.89

BEAM ANGLE (90-270) = 102

WG-60PTLWW-12IN-S-930-LML-WW-P4 10'-0" ceiling height

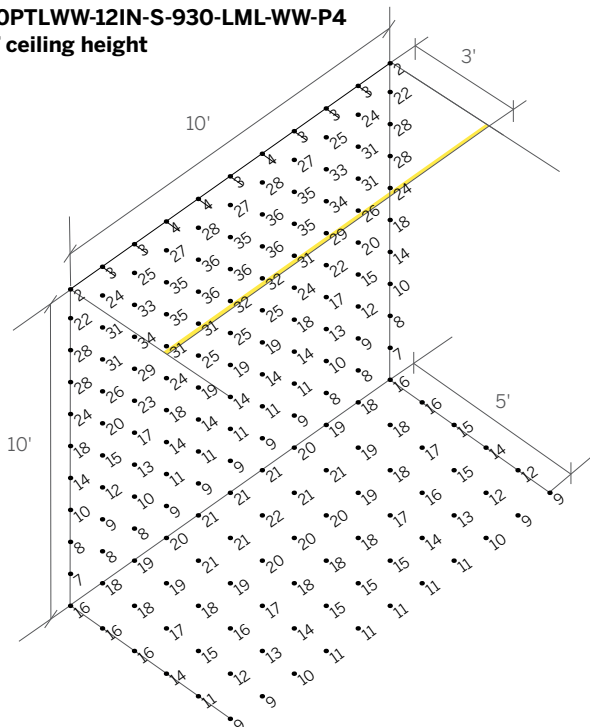

Surface reflectances:

80% Ceiling

50% Wall

20% Floor

Illuminance points are spaced 1'-0" on center.

Illuminance values are shown in units of foot-candles.