



ProTools 60 Linear Wall Wash 6" / 12" Surface Mount

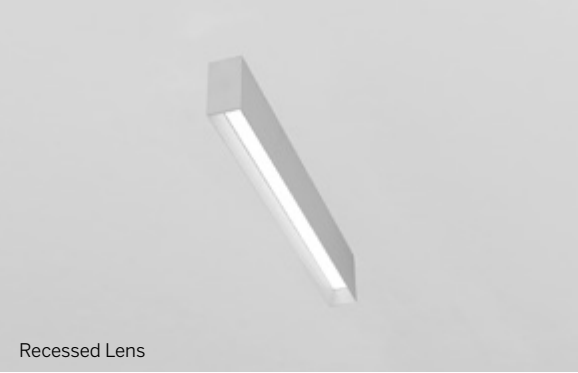


2.4" aperture recessed linear wall washer (6" or 12" length) with flush faceplate and recessed lens compatible with all ceiling types.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts, louvers and lenses <i>Sure-lock</i> mechanical connection system eliminates light leak Standard and tailored lengths including corner configurations Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom
Integration	Fixation onto any surface type End wall mechanical and power connection option
Distribution	Wall Wash
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	LML - Linear Micro-prismatic Lens - diffusion and efficiency for wall wash
Reflector	White: high efficiency Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

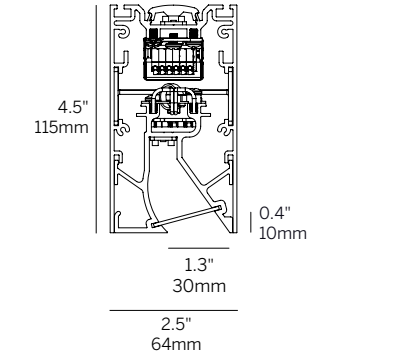

Recessed Lens + Wall Wash (LML + WW)

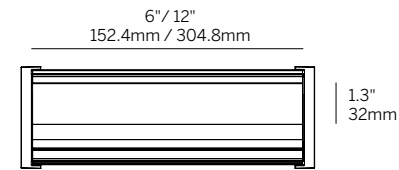

ProTools 60 Linear Wall Wash 6" / 12" Surface Mount

Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ¹	Driver ²	Housing Finish	Reflector Finish	Options
WG-60PTLWW	SM	S	6 12	927 930 935 940 TW1840 TW2765	LML	WW	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W S F	AWNRF BT WCY EM

Model
■ WG-60PTLWW = ProTools 60 Linear Wall Wash

Fixation
■ SM = Surface Mount

Pattern
■ S = Straight run

Length
■ 6 = 6"
■ 12 = 12"

CRI/CCT (90+ CRI)
■ 927 = 2700K
■ 930 = 3000K
■ 935 = 3500K
■ 940 = 4000K
■ TW1840 = Tunable white 1800K - 4000K
■ TW2765 = Tunable white 2700K - 6500K

Optic
■ LML = Linear micro-prismatic lens

Beam
■ WW = Wall Wash

Power¹
■ P1 = 3 W/ft
■ P2 = 6 W/ft
■ P3 = 10 W/ft
■ P4 = 15 W/ft

Driver (Remote)²
■ E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
■ L1 = Lutron 1% dimming, Ecosystem (120-277V)
■ D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
■ D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

Housing Finish
■ W = White, 15% gloss, RAL 9003 (standard)
■ B = Black, 15% gloss, RAL 9005
■ S = Silver, 15% gloss, RAL 9006
■ F = Custom finished trim, specify RAL

Reflector Finish
■ W = White, 15% gloss, RAL 9003 (standard with RLW)
■ S = Silver, 15% gloss, RAL 9006
■ F = Custom finished trim, specify RAL

Options
■ AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
■ BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8)
■ WCY = Wood ceiling yoke
■ EM = Emergency (remote)

Notes
1 Refer to specsheet for delivered lumen data for all product configurations.
2 See power supply page for details.

