


ProTools 60 Linear Wall Wash Recessed



2.4" aperture recessed linear wall washer with flush faceplate and recessed lens compatible with all ceiling types for illuminating walls up to 30' high.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts and lenses Standard and tailored lengths including corner configurations Finishes: white, silver and custom
Integration	Fixation into gypsum, hard ceilings and all grid ceiling types
Distribution	Wall Wash
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	LML - Linear Micro-prismatic Lens - diffusion and efficiency for wall wash
Reflector	White: high efficiency Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Chicago Plenum
Voltages	120-277VAC

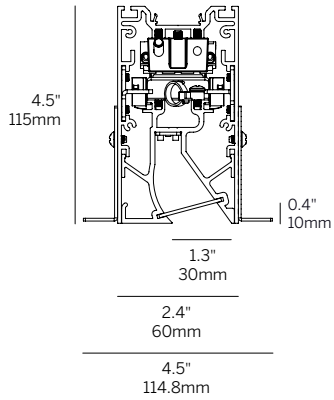

Recessed Lens + Wall Wash (LML + WW)

ProTools 60 Linear Wall Wash Recessed

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ³	Driver ⁴	Housing Finish	Reflector Finish	Options
WG-60PTLWW	RPT RBT RGT9 RGT15 RGTS	S PI ¹ PO ¹ PZ ¹	24 48 96 XX	927 930 935 940 TW1840 TW2765	LML	WW	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) S F	W S F	AWNRF BT CP NYC TF EM

Model

- WG-60PTLWW = ProTools 60 Linear Wall Wash

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid
- RGTS = Recessed trim for slot grid

Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K

Optic

- LML = Linear micro-prismatic lens

Beam

- WW = Wall Wash

Power³

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft

Driver (Integral)⁴

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

Housing / Trim Finish


- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Reflector Finish


- W = White, 15% gloss, RAL 9003
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options


- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8)
- CP = Chicago Plenum rated, complies with CCEA requirements
- NYC = 6' whip per run
- TF = Top feed
- EM = Emergency




Plaster trim (RPT)




Recessed trim (RBT)



9/16" grid (RGT9)



15/16" grid (RGT15)



Slot (RGTS)

Notes

- See pattern spec sheet.
- Individual fixture lengths less than 2' may require remote driver.
- Refer to specsheet for delivered lumen data for all product configurations.
- See power supply page for details.

