

ProTools 60 Linear Wall Wash

Surface Mount




Contents

- overview
- specifications / configurator
- photometry




2.4" aperture surface mounted linear wall washer with flush faceplate and recessed lens for illuminating walls up to 30' high.

- 2.4" aperture, integrated solution compatible with all ceiling types.
- Standard and tailored run lengths, including corners.
- Wash to 30' wall height.
- Modularity of insert modules for ultimate flexibility.
- Extreme brightness control eliminates glare.
- Consistent LED technology throughout the Whitegoods product range.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (Eldoled).
- Efficacy up to 87 lumens per watt (delivered) @ 3000K, see photometry page for details.
- L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours.
- ETL and ETL-C for dry and damp location.

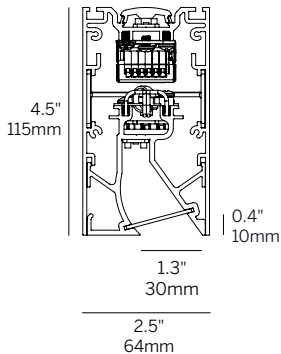

Recessed Lens + Wall Wash (LML + WW)

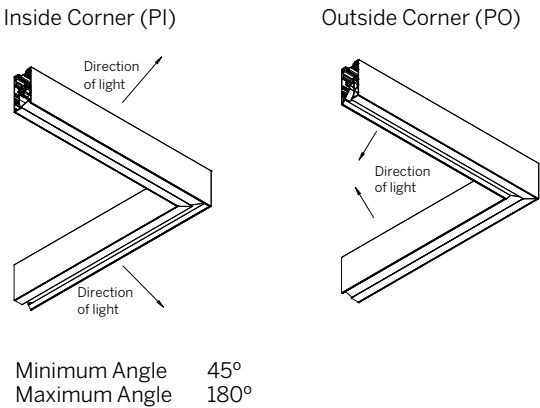

ProTools 60 Linear Wall Wash

Surface Mount

inter•lux

Ordering Information											
WG-60PTLWW	SM				LML	WW					
Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ⁴	Driver ⁵	Housing Finish	Reflector Finish	Options
WG-60PTLWW	SM	S P ¹ PI ¹ PO ¹ PZ ¹	24 48 96 XX	927 930 935 940 TW1840 ³ TW2765 ³	LML	WW	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W B S F	AWNRF BT EW WCY EM

Model

- WG-60PTLWW = ProTools 60 Linear Wall Wash

Fixation

- SM = Surface Mount

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K³
- TW2765 = Tunable white 2700K - 6500K³

Optic

- LML = Linear micro-prismatic lens

Beam

- WW = Wall Wash

Power⁴

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft

Driver (Integral)⁵

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

Housing Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Reflector Finish

- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8) (Remote)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8) (Remote)
- EW = End wall bracket
- WCY = Wood ceiling yoke
- EM = Emergency

- See pattern spec sheet.
- Individual fixture lengths less than 2' may require remote driver.
- Specify Tunable White in 3" increments for continuous light.
- See photometric data sheet for delivered lumens.
- See power supply page for details.


ProTools 60 Linear Wall Wash

Surface Mount




WG-60PTLWW-...-LML-WW-...-W-W					
Delivered Lumens Per Foot					
		Power			
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
CCT	927	268	504	774	1141
	930	279	524	806	1188
	935	289	543	836	1244
	940	297	558	858	1278
UGR ¹		31.1	33.3	34.8	36.1
Power Multiplier					
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
9XX		0.24	0.44	0.68	1.00
TW1840					
1800K		0.15	0.29	0.46	0.65
4000K		0.24	0.47	0.75	1.06
TW2765					
2700K		0.23	0.45	0.71	1.00
6500K		0.24	0.47	0.74	1.05
CCT Multiplier					
927		0.96	1.00	1.04	1.06
930					
935					
940					

1 UGR value noted is the maximum UGR (crosswise) with 930 LEDs at noted Power level.



BEAM ANGLE (0-180) = 57.8
BEAM ANGLE (90-270) = 102

WG-60PTLWW-...-S-930-LML-WW-P2
10'-0" ceiling height

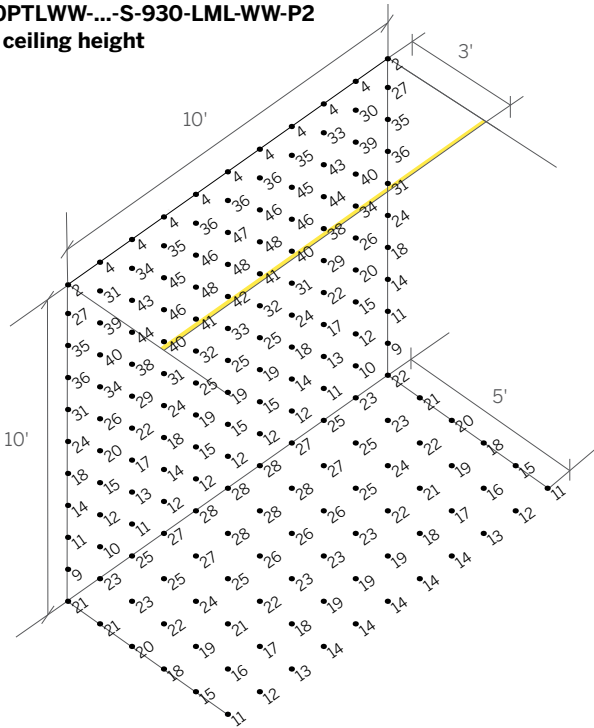

Surface reflectances:

80% Ceiling
50% Wall
20% Floor

Illuminance points are spaced 1'-0" on center.
Illuminance values are shown in units of foot-candles.

WG-60PTLWW-...-S-930-LML-WW-P4
20'-0" ceiling height

