


ProTools 60 Linear Wall Wash Surface Mount



2.4" aperture surface mounted linear wall washer with flush faceplate and recessed lens for illuminating walls up to 30' high.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly Field adjustable suspension height and position <i>Sure-lock</i> mechanical connection system eliminates light leak Standard and tailored lengths and corner configurations Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom Clear suspension cables with white ceiling escutcheons standard
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	Wall Wash
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	LML - Linear Micro-prismatic Lens - diffusion and efficiency for wall wash
Reflector	White: high efficiency Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

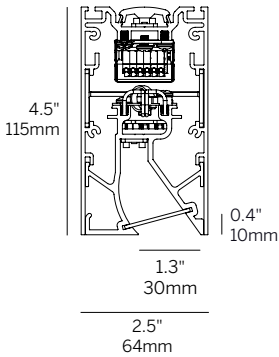

Recessed Lens + Wall Wash (LML + WW)

ProTools 60 Linear Wall Wash Surface Mount

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ⁴	Driver ⁵	Housing Finish	Reflector Finish	Options
WG-60PTLWW	SM	S P ¹ PI ¹ PO ¹ PZ ¹	24 48 96 XX	927 930 935 940 TW1840 ³ TW2765 ³	LML	WW	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W S F	AWNRF BT EW WCY EM

- Model**
- WG-60PTLWW = ProTools 60 Linear Wall Wash

- Fixation**
- SM = Surface Mount

- Pattern**
- S = Straight run
 - P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
 - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
 - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
 - PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

- Length²**
- 24 = 24"
 - 48 = 48"
 - 96 = 96"
 - XX = Specify inches to the nearest 0.25"

- CRI/CCT (90+ CRI)**
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
 - TW1840 = Tunable white 1800K - 4000K³
 - TW2765 = Tunable white 2700K - 6500K³

- Optic**
- LML = Linear micro-prismatic lens

- Beam**
- WW = Wall Wash

- Power⁴**
- P1 = 3 W/ft
 - P2 = 6 W/ft
 - P3 = 10 W/ft
 - P4 = 15 W/ft

- Driver (Integral)⁵**
- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
 - L1 = Lutron 1% dimming, Ecosystem (120-277V)
 - D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
 - D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

- Housing Finish**
- W = White, 15% gloss, RAL 9003 (standard)
 - B = Black, 15% gloss, RAL 9005
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL

- Reflector Finish**
- W = White, 15% gloss, RAL 9003 (standard)
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL

- Options**
- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8) (Remote)
 - BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8) (Remote)
 - EW = End wall bracket
 - WCY = Wood ceiling yoke
 - EM = Emergency

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- See pattern spec sheet.
 - Individual fixture lengths less than 2' may require remote driver.
 - Specify Tunable White in 3" increments for continuous light.
 - Refer to specsheet for delivered lumen data for all product configurations.
 - See power supply page for details.

