



ProTools 60 Linear Wall Wash Suspended

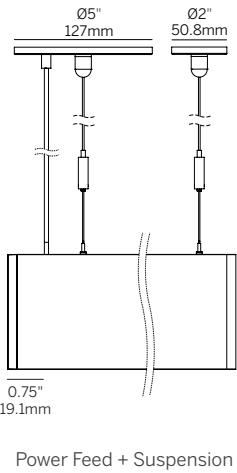

2.4" aperture suspended linear wall washer with flush faceplate and recessed lens for illuminating walls up to 30' high.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Field adjustable suspension height and position <i>Sure-lock</i> mechanical connection system eliminates light leak Standard and tailored lengths including corner configurations Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom Clear suspension cables with white ceiling escutcheons standard
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	Wall Wash
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	LML - Linear Micro-prismatic Lens - diffusion and efficiency for wall wash
Reflector	White: high efficiency Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

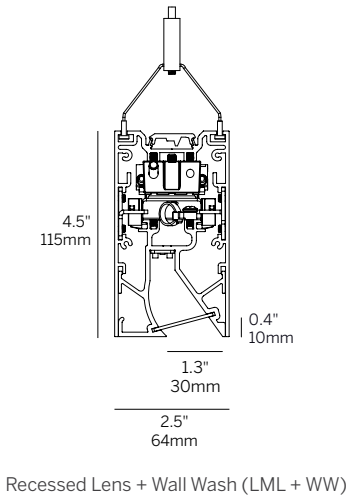

ProTools 60 Linear Wall Wash Suspended

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ⁴	Drive ⁵	Housing Finish	Reflector Finish	Options
WG-60PTLWW	S48 S96 SXX	S P PI ¹ PO ¹ PZ ¹	24 48 96 XX ³	927 930 935 940 TW1840 ³ TW2765 ³	LML	WW	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W S F	AWNRF BT EM

Model WG-60PTLWW = ProTools 60 Linear Wall Wash	Power⁴ - P1 = 3 W/ft - P2 = 6 W/ft - P3 = 10 W/ft - P4 = 15 W/ft
Fixation Power suspension w/5" canopy standard. Non-feed suspensions provided with 2" canopy - S48 = 48" suspension cable - S96 = 96" suspension cable - SXX = Specify suspension cable length to nearest 0.25"	Driver (Integral)⁵ - E1 = eldoLED 0.1% dimming, 0-10V (120-277V) - L1 = Lutron 1% dimming, Ecosystem (120-277V) - D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V) - D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]
Pattern - S = Straight run - P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹ - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹ - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹ - PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹	Housing Finish - W = White, 15% gloss, RAL 9003 (standard) - B = Black, 15% gloss, RAL 9005 - S = Silver, 15% gloss, RAL 9006 - F = Custom finished trim, specify RAL
Length² 24 = 24" 48 = 48" 96 = 96" - XX = Specify inches to the nearest 0.25"³	Reflector Finish - W = White, 15% gloss, RAL 9003 (standard) - S = Silver, 15% gloss, RAL 9006 - F = Custom finished trim, specify RAL
CRI/CCT (90+ CRI) 927 = 2700K 930 = 3000K 935 = 3500K 940 = 4000K - TW1840 = Tunable white 1800K - 4000K³ - TW2765 = Tunable white 2700K - 6500K³	Options - AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8) - BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8) (Remote) - EM = Emergency

Optic LML = Linear micro-prismatic lens
Beam WW = Wall Wash

Whitegoods reserves the right to change any information without prior notice.

Notes
1 See pattern spec sheet.
2 Individual fixture lengths less than 2' may require remote driver.
3 Specify Tunable White products in 3" increments for continuous light.
4 Refer to specsheet for delivered lumen data for all product configurations.
5 See power supply page for details.

