


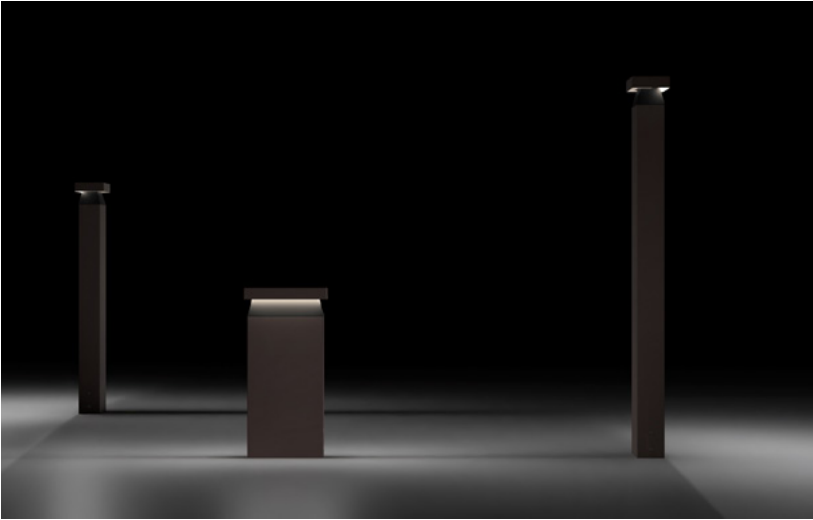

Contents	
2	Single Emission product configurator diagrams / drivers
3	Quad Emission product configurator diagrams / drivers
4	photometry

General: Buzzer_Q is part of a comprehensive family of bollards and path markers designed for the most various applications, from pedestrian walkaways to public parks, commercial buildings and residential areas.

With no up-light component (Dark skies compliant), two distributions (180° and 360°) and multiple sizes available, Buzzer_Q can easily fit into every design.

Buzzer_Q's special optic design provides no shadows at the bottom of the fixture, making the ground evenly illuminated.

Fixture Body: Marine Grade. Open pore Anodized and Powder Coated Die-Cast Aluminum.

Diffuser: UV Resistant Polycarbonate.

Mounting: Standard Mounting Base (Provided with fixture). Ground peg available upon request.

Dimensions/Weight: 15.8" (4.41 lbs) – 27.6" (6.17 lbs) – 41.3" (7.72 lbs).

Driver: Remote, 120-277V Dimmable 0-10V.

Wattages: 5.5W (Single Emission) – 11.5W (Quad Emission).

Cable: Fixture comes with 4.17' of power cable.

Safety features: Fixture is equipped with Electrostatic discharge protection and Surge Protection (0.5 KV).

IP rating: IP65 for protection against dust and moderate water jets from any angle.

IK rating: IK 09

ETL Certification: ETL, wet location

Optics: Fixed, with Single (180°) or Quad (360°) Light Emission.


Color temperatures: 2200K – 2700K – 3000K – 4000K.

CRI: 80+

BUG Rating: B1-U0-G0 (Dark Sky Compliant)


Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

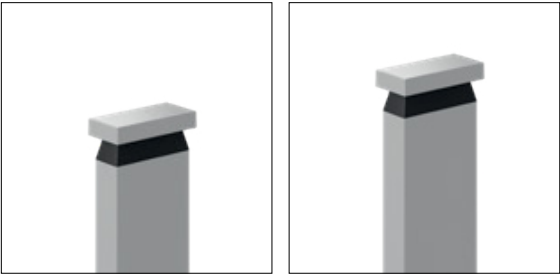

6.5" x 3" x 15.8"H (SE 5.5W / QE 11.5W)

6.5" x 3" x 27.6"H (SE 5.5W / QE 11.5W)

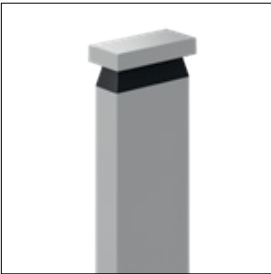

6.5" x 3" x 41.3"H (SE 5.5W / QE 11.5W)


Delivered Lumens*	[6 - CC]	[12 - CC]
SE	525	–
QE	–	871

*Values shown for 3000K

SINGLE EMISSION

Mounting Accessories								
BZQ		SE		6 - CC		GE		
Product	Trim	Type	Diameter	Wattage/Operation	Color Temp	Optic	+	Driver (Required)
BZQ = Buzzer Q	RBOBG = Rectangular Bollard, Black Grey RBOGR = Rectangular Bollard, Grey RBODB = Rectangular Bollard, Dark Brown	SE = Single Emission	16 = 6.5" X 3" X 15.8"H 28 = 6.5" X 3" X 27.6"H 41 = 6.5" X 3" X 41.3"H	6 CC = 5.5W / Constant Current (350mA)	22 = 2200K 27 = 2700K 30 = 3000K 40 = 4000K	GE = General Emission		ECO30W-350 SOLO50W-350 SOLO100W-350
								W-F900004 (anchor bolts)

6.5" x 3" x 15.8"H 5.5W 350mA




DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

6.5" x 3" x 27.6"H 5.5W 350mA




DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

6.5" x 3" x 41.3"H 5.5W 350mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

Mounting Accessories




W-F900004
(ground peg)

QUAD EMISSION

Mounting Accessories								
BZQ		QE		12 - CC		GE		
Product	Trim	Type	Diameter	Wattage/Operation	Color Temp	Optic	+	Driver (Required)
BZQ = Buzzer Q	RBOBG = Rectangular Bollard, Black Grey RBOGR = Rectangular Bollard, Grey RBODB = Rectangular Bollard, Dark Brown	QE = Quad Emission	16 = 6.5" X 3" X 15.8"H 28 = 6.5" X 3" X 27.6"H 41 = 6.5" X 3" X 41.3"H	12 CC = 11.5W / Constant Current (700mA)	22 = 2200K 27 = 2700K 30 = 3000K 40 = 4000K	GE = General Emission		ECO30W-700 SOLO50W-700 SOLO100W-700
								W-F900004 (anchor bolts)

6.5" x 3" x 15.8"H 11.5W 700mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700

0-10V EldoLED
ECOdrive 30W
for 1-2 fixtures


SOLO50W-700

0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-700

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures

6.5" x 3" x 27.6"H 11.5W 700mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700

0-10V EldoLED
ECOdrive 30W
for 1-2 fixtures


SOLO50W-700

0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-700

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures

6.5" x 3" x 41.3"H 11.5W 700mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700

0-10V EldoLED
ECOdrive 30W
for 1-2 fixtures

SOLO50W-700

0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-700

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures

Mounting Accessories




W-F900004
(ground peg)




BZQ-QBOBG-SE-41-5-CC-30-GE



0.5fc

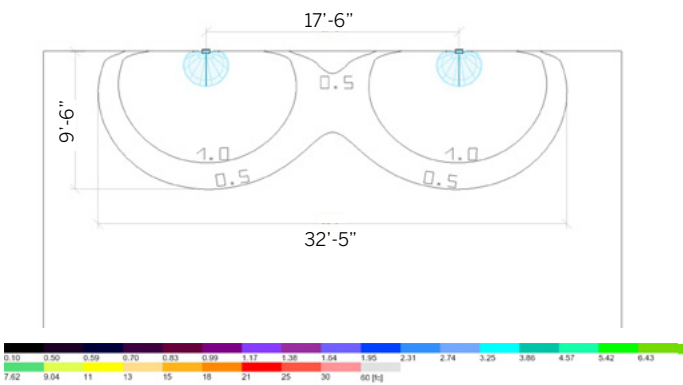



1fc

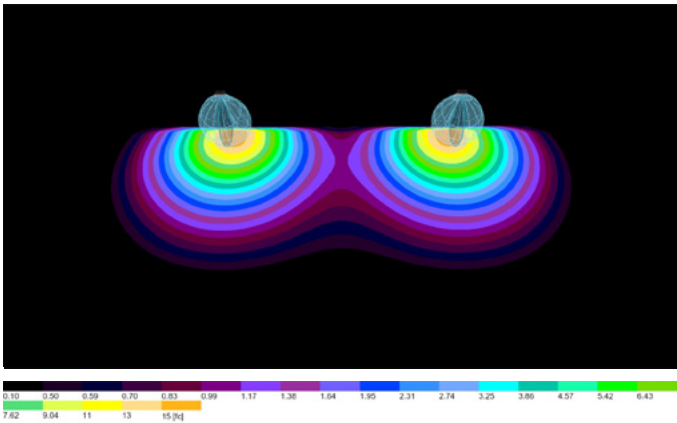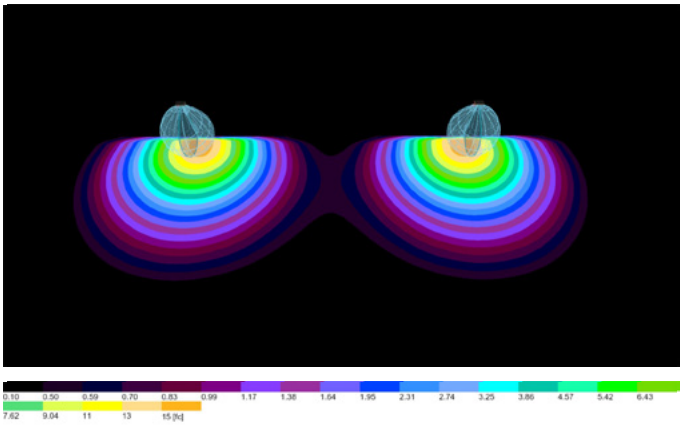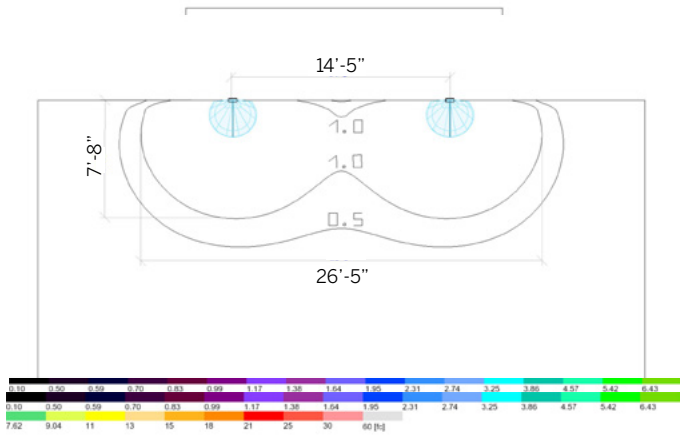

BZQ-QBOBG-QE-41-12-CC-30-GE



0.5fc

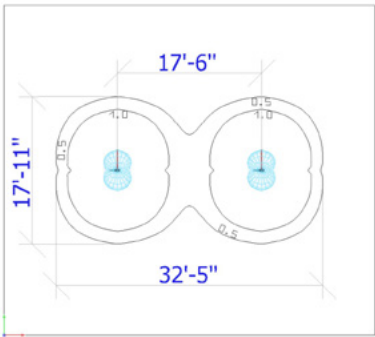

1fc

