

FLEX 15x15 MULTI



0.6x0.6"

inter•lux

STATIC
WHITE

FREE
CUT

TUNABLE
WHITE

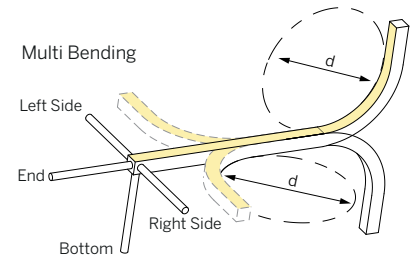

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS	STATIC WHITE (CRI >90 Ra)
	SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

IES FILES	DRIVER OPTIONS (See driver page for details)	DELIVERED LUMENS lm/ft
	D010 = eldoLED, 10%, 0-10V dimming, 120-277V	Cut Interval
	EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	1800K
	DPH = Phase Dimming, 1% dimming, 120V only	2400K
	L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	2700K
	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V	3000K
	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V	3500K
		4000K
		6000K

ACCESSORIES	ORDERING INFORMATION
	MODEL
	JACKET
	CCT
	LED TYPE
	CABLE ENTRY
	IP RATING
	CABLE LENGTH
	LENGTH
	DRIVERS
	63S1515M
	1
	1800K
	2400K
	2700K
	3000K
	3500K
	4000K
	6000K
	5 W/m (8m max.)
	1.5 W/ft (26.3ft max.)
	10 W/m (5m max.)
	3 W/ft (16.4ft max.)
	E End
	B Bottom
	SL Side Left
	SR Side Right
	7 IP67
	2 IP20
	003 0.3m (1ft)
	010 1m (3.3ft)
	030 3m (9.8ft)
	050 5m (16.4ft)
	100 10m (32.8ft)
	.XXXX
	Length in inches
	D010
	EL96
	DPH
	L3D0E
	DALI-DT6
	UNV96-WL
	UNV384-WL

STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	DELIVERED LUMENS lm/ft
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	Cut Interval
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	1800K
DPH = Phase Dimming, 1% dimming, 120V only	2400K
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	2700K
UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V	3000K
UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V	3500K
	4000K
	6000K

ORDERING INFORMATION
MODEL
JACKET
CCT
LED TYPE
CABLE ENTRY
IP RATING
CABLE LENGTH
LENGTH
DRIVERS
63S1515HOM
1
1800K
2400K
2700K
3000K
3500K
4000K
6000K
12 W/m (5m max.)
4 W/ft (16.4ft max.)
E End
B Bottom
SL Side Left
SR Side Right
7 IP67
2 IP20
003 0.3m (1ft)
010 1m (3.3ft)
030 3m (9.8ft)
050 5m (16.4ft)
100 10m (32.8ft)
.XXXX
Length in inches
D010
EL96
DPH
L3D0E
DALI-DT6
UNV96-WL
UNV384-WL

Powered by

I B L

410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



updated 8.2026

FLEX 15x15 MULTI



0.6x0.6"

inter•lux

STATIC
WHITE

FREE
CUT

TUNABLE
WHITE

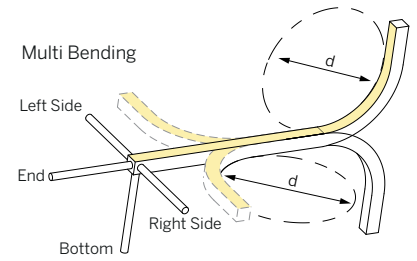

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS

STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

IES
FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

		DELIVERED LUMENS lm/ft						
Cut Interval		1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05	Free Cut	52	69	80	80	82	89	84
SF10	Free Cut	102	133	156	157	160	173	163

ACCESSORIES

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515M Flex 15x15 Multi	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	SF05 5 W/m (7.5m max.) 1.5 W/ft (24.6ft max.) SF10 10 W/m (5m max.) 3 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S1515M	1							

FLEX 15x15 MULTI




0.6x0.6"

inter•lux

STATIC
WHITE

FREE
CUT

TUNABLE
WHITE

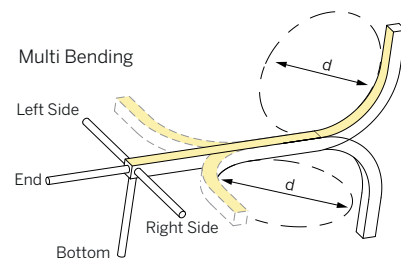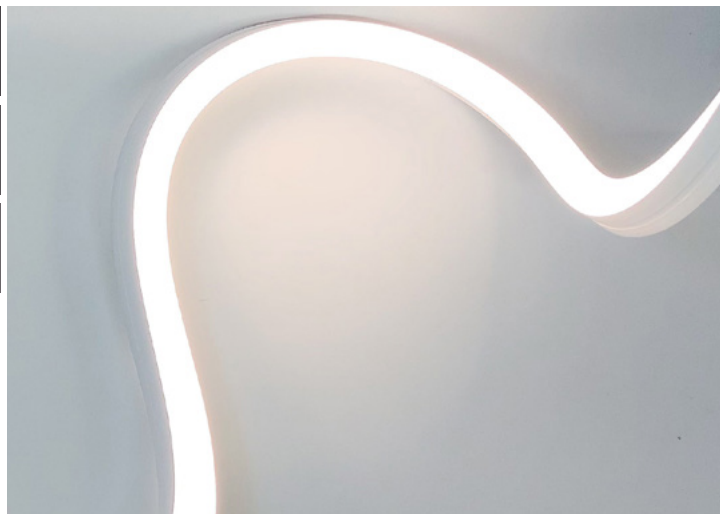

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS

TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

IES
FILES

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT08	50 mm (2")	74	104	115	120	121	123	119

ACCESSORIES

ORDERING INFORMATION

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515M Flex 15x15 Multi	1 White	C18 1800K	24 2400K	CT08 2x8 W/m (5m max.) 2x2.4 W/ft (16.4ft max.) * Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24 2400K	27 2700K		B Bottom	2 IP20	010 1m (3.3ft)		
		C27 2700K	30 3000K		SL Side Left		030 3m (9.8ft)		
		C30 3000K	35 3500K		SR Side Right		050 5m (16.4ft)		
		C35 3500K	40 4000K				100 10m (32.8ft)		
		C40 4000K	60 6000K						
63S1515M	1			CT08					

FLEX 15x15 MULTI

0.6x0.6"

inter•lux

ACCESSORIES

STATIC
WHITE


TYPE Aluminum profile
MOUNTING Surface mount

FREE
CUT


ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5AP Silver	0030 30mm (1.18")
	2AP Black	1000 1000mm (39.37")
63S1515X		


TUNABLE
WHITE

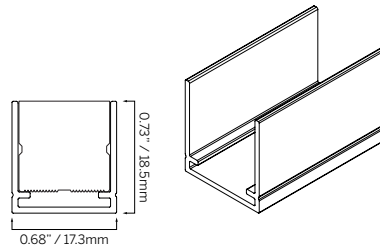

30

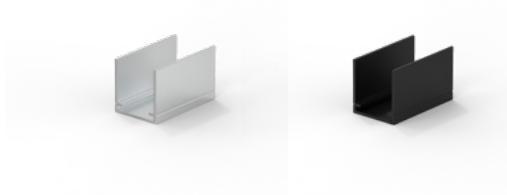

1000

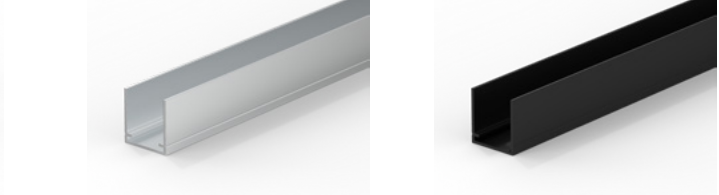


DRIVERS

TYPE Locking profile
MOUNTING Surface mount


IES
FILES

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5LP Silver	0035 35mm (1.38")
	2LP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
		2500 2500mm (98.43")
63S1515X		

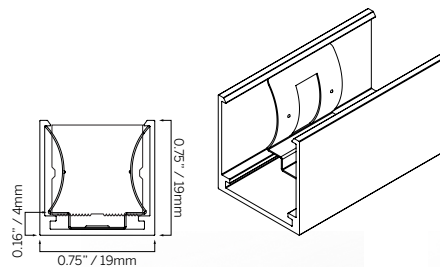

35

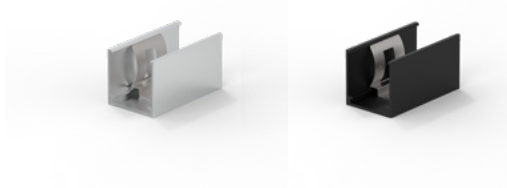

1000/2000/2500




ACCESSORIES


TYPE Deep Self Locking Profile
MOUNTING Surface mount

ORDERING INFORMATION


MODEL	FINISH	LENGTH
63S1515X	5LPC Silver	0035 35mm (1.38")
	2LPC Black	1000 1000mm (39.37")
63S1515X		



35

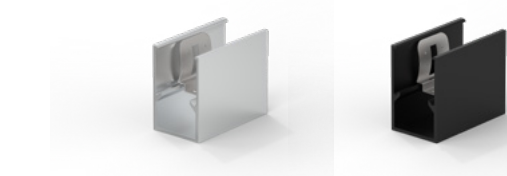

1000

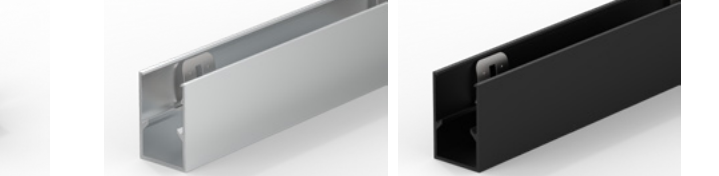

FLEX 15x15 MULTI

0.6x0.6"

STATIC WHITE

FREE CUT

TUNABLE WHITE

ACCESSORIES

TYPE


Stainless Mounting Clip

MOUNTING

Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515H	5SC Silver 2SC Black	0020 20mm (0.79")
63S1515H		0020

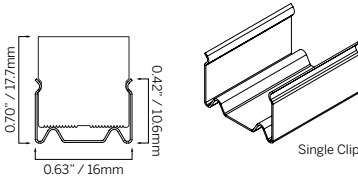

DRIVERS

IES FILES

ACCESSORIES

TYPE

Stainless Bendable Profile

MOUNTING

Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
63S1515X	5SC Silver 2SC Black	1000 1000mm (39.37")
63S1515X		1000

