
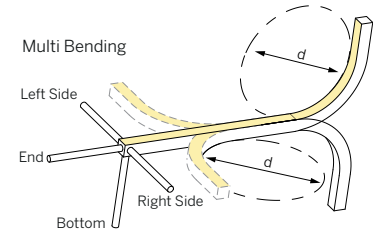


FLEX 15x15 MULTI HIGH TEMP

0.6x0.6"

inter•lux

STATIC
WHITE



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS

STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm) [WORKING TEMP. -25°C TO 100°C (-13°F TO 212°F)]

IES
FILES

DRIVER OPTIONS (See driver page for details)

DO10 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S04 50 mm (2")	60	78	84	91	93	93	94

ACCESSORIES

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63HTS1515M Flex 15x15 Multi High Temp	1 White	B18 1800K B24 2400K B27 2700K B30 3000K B35 3500K B40 4000K B60 6000K	S04 4 W/m (5m max.) 1.2 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DO10 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63HTS1515M	1		S04					

FLEX 15x15 MULTI HIGH TEMP

0.6x0.6"

inter•lux


STATIC
WHITE

ACCESSORIES


TYPE Aluminum profile
MOUNTING Surface mount

ORDERING INFORMATION


MODEL	FINISH	LENGTH
63S1515X	5AP Silver	0030 30mm (1.18")
	2AP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
		2500 2500mm (98.43")
63S1515X		

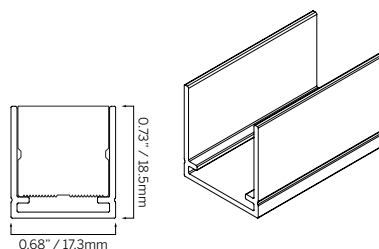

30

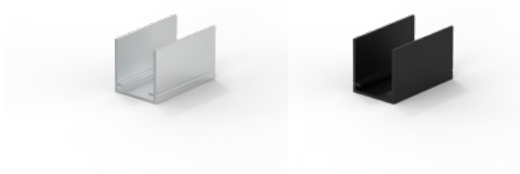

1000/2000/2500

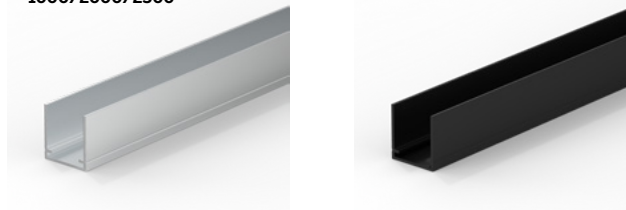


DRIVERS


TYPE Locking profile
MOUNTING Surface mount

ORDERING INFORMATION


MODEL	FINISH	LENGTH
63S1515X	5LP Silver	0035 35mm (1.38")
	2LP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
		2500 2500mm (98.43")
63S1515X		

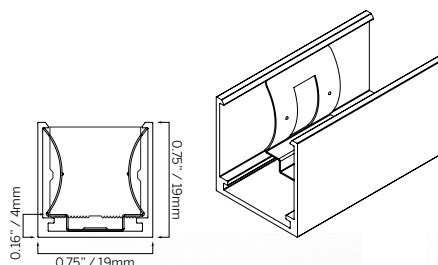

35

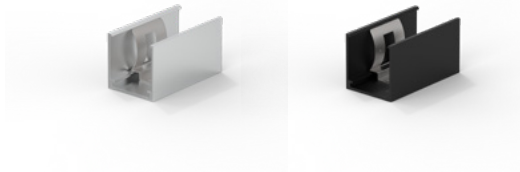


1000/2000/2500

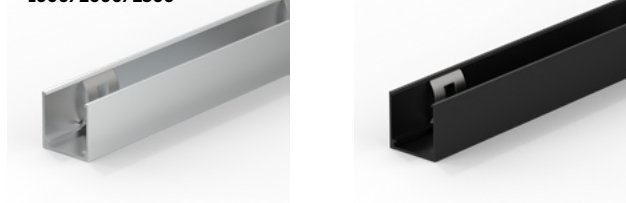


TYPE Deep Self Locking Profile
MOUNTING Surface mount

ORDERING INFORMATION


MODEL	FINISH	LENGTH
63S1515X	5LPC Silver	0035 35mm (1.38")
	2LPC Black	1000 1000mm (39.37")
63S1515X		



35

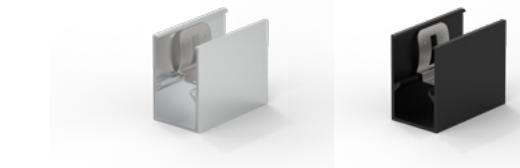

1000

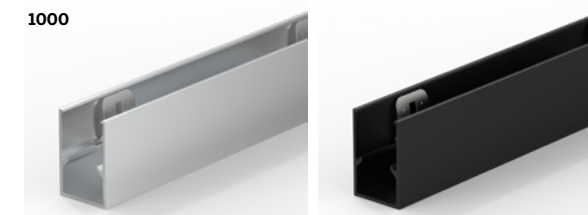

FLEX 15x15 MULTI HIGH TEMP


0.6x0.6"

STATIC
WHITE

ACCESSORIES

TYPE Stainless Mounting Clip
MOUNTING Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
63S1515H	5SC Silver 2SC Black	0020 20mm (0.79")
63S1515H		0020

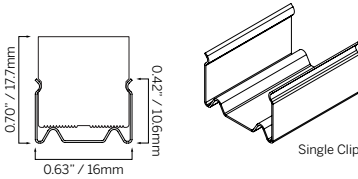

DRIVERS

IES
FILES

ACCESSORIES

TYPE Stainless Bendable Profile
MOUNTING Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
63S1515X	5SC Silver 2SC Black	1000 1000mm (39.37")
63S1515X		1000

