

FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

STATIC WHITE



FREE CUT

TUNABLE WHITE

WARM DIM

RGB/RGBW

PIXEL

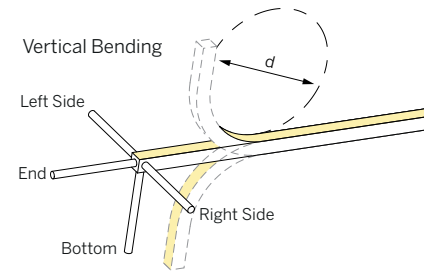

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVERS

IES FILES

ACCESSORIES

DRIVER OPTIONS (See driver page for details)

DO10 = eidoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eidoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eidoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

		DELIVERED LUMENS lm/ft						
Cut Interval		1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05	50 mm (2")	4	5	6	7	7	7	7
S12	50 mm (2")	10	13	15	16	16	16	16

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S05 5 W/m (16m max.) 1.5 W/ft (52.5ft max.) S12 12 W/m (8m max.) 3.7 W/ft (26.2ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DO10 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S1515V	2							

STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)

DO10 = eidoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eidoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eidoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

		DELIVERED LUMENS lm/ft						
Cut Interval		1800K	2400K	2700K	3000K	3500K	4000K	6000K
S13	62.5 mm (2.5")	17	23	24	27	27	27	27

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515HOV Flex 15x15 Vertical High Output	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S13 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DO10 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S1515HOV	2		S13					

Powered by

I B L

410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



updated 8.2026

FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

STATIC
WHITE



FREE
CUT

TUNABLE
WHITE

WARM
DIM

RGB/
RGBW

PIXEL

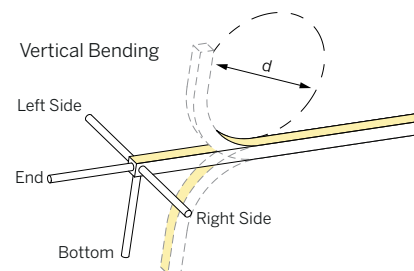

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVERS

IES
FILES

DRIVER OPTIONS (See driver page for details)

DO10 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

		DELIVERED LUMENS lm/ft						
Cut Interval		1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05	Free Cut	4	5	6	6	6	6	6
SF12	Free Cut	9	12	13	13	13	15	14

ACCESSORIES

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	SF05 5 W/m (12.5m max.) 1.5 W/ft (41ft max.) SF12 12 W/m (6m max.) 3.7 W/ft (19.7ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DO10 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S1515V	2							

FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

STATIC
WHITE



FREE
CUT

TUNABLE
WHITE

WARM
DIM

RGB/
RGBW

PIXEL

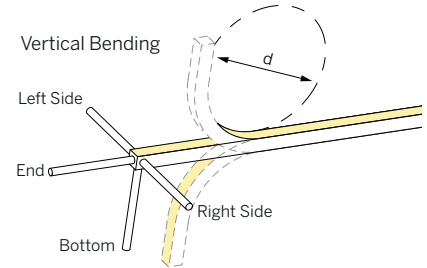

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVERS

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10	62.5 mm (2.5")	7	10	12	12	12	12	13

IES
FILES

ORDERING INFORMATION

ACCESSORIES

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	CT10 2x9.6 W/m (7m max.) 2x2.9 W/ft (23ft max.) * Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
63S1515V	2			CT10					

TUNABLE WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10	83.3 mm (3.3")	12	16	18	20	20	20	20
CT13	83.3 mm (3.3")	15	21	24	25	25	26	26



ORDERING INFORMATION

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515HOV Flex 15x15 Vertical High Output	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	CT10 2x10 W/m (4m max.) 2x3 W/ft (13.1ft max.) CT13 2x13 W/m (3m max.) 2x4 W/ft (9.8ft max.) * Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
63S1515HOV	2								

FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

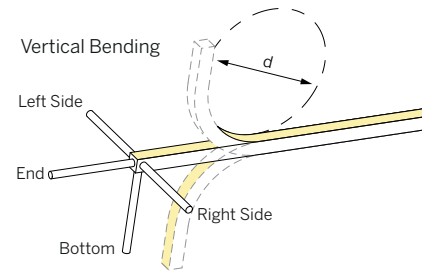

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)

MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

		DELIVERED LUMENS lm/ft	
Cut Interval		2700K	3000K
14R	83.33 mm (2")	14	15



ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	C2718W 2700-1800K C3018W 3000-1800K	14R 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	MAGSDM96-WD
63S1515V	2		14R					MAGSDM96-WD

FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

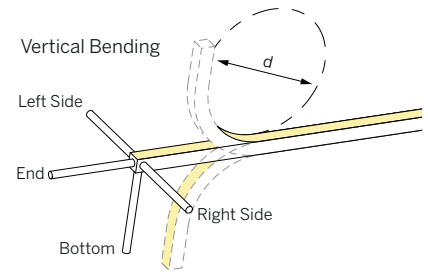

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years



RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DMX = eldoLED, 24V, 0.1% DMX Dimming	

		DELIVERED LUMENS lm/ft		
	Cut Interval	RED	GREEN	BLUE
L12	100 mm (3.9")	2	5	1

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	RGB RGB	L12 12 W/m (5m max.) 3.7 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	2	RGB	L12					DMX

RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DMX = eldoLED, 24V, 0.1% DMX Dimming	

		DELIVERED LUMENS lm/ft					
	Cut Interval	RED	GREEN	BLUE	2700K	3000K	4000K
L16	100 mm (3.9")	2	5	1	5	5	5

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	RGBW27 RGBW(2700K) RGBW30 RGBW(3000K) RGBW40 RGBW(4000K)	L16 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	2		L16					DMX

BLACK FLEX 15x15 VERTICAL

0.6x0.6"

inter•lux

STATIC
WHITE



FREE
CUT

TUNABLE
WHITE

WARM
DIM

RGB/
RGBW

PIXEL

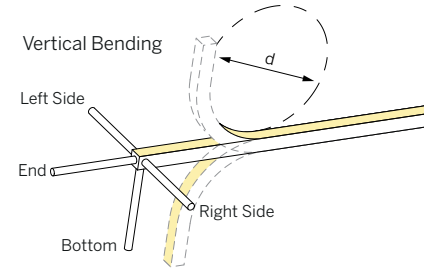

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

PIXEL - STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

				DELIVERED LUMENS lm/ft						
	Pixels	DMX Addresses	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
DMX10P13	10 /m (3.94")	10 /m (1 /px)	100 mm (3.9")	10	13	14	16	16	16	16

DRIVERS

IES
FILES

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	DMX10P13 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	2		DMX10P13					DMX

PIXEL - TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

				80.5DELIVERED LUMENS lm/ft							
	Pixels	DMX Addresses	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
CTDMX10P13	10 /m (3.94")	20 /m (2 /ft)	100 mm (3.9")	5	7	7	8	8	8	8	

ORDERING INFORMATION

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	CTDMX10P13 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	2			CTDMX10P13					DMX

Powered by

I B L



410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

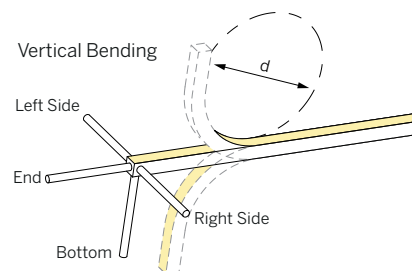

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years



PIXEL - RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft		
				RED	GREEN	BLUE
DMX02P14	2 /m (19.7")	6 /m (3 /px)	500 mm (19.7")	1	4	1
DMX10P14	10 /m (3.94")	30 /m (3 /px)	100 mm (3.9")	1	4	1

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	RGB RGB	DMX02P14 14 W/m (5m max.) 4.3 W/ft (16.4ft max.) DMX10P14 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	2	RGB						DMX

PIXEL - RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft					
				RED	GREEN	BLUE	2700K	3000K	4000K
DMX10P16	10 /m (3.94")	40 /m (4 /px)	100 mm (3.9")	11	29	7	26	28	29

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	2 Black	RGBW27 RGBW(2700K) RGBW30 RGBW(3000K) RGBW40 RGBW(4000K)	DMX10P16 16 W/m 5m max.) 4.9 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	2		DMX10P16					DMX

FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

ACCESSORIES

STATIC
WHITE

TYPE Aluminum profile
MOUNTING Surface mount

FREE
CUT

ORDERING INFORMATION


MODEL	FINISH	LENGTH
63S1515X	5AP Silver	0030 30mm (1.18")
	2AP Black	1000 1000mm (39.37")
63S1515X		

TUNABLE
WHITE

WARM
DIM



RGB/
RGBW

PIXEL

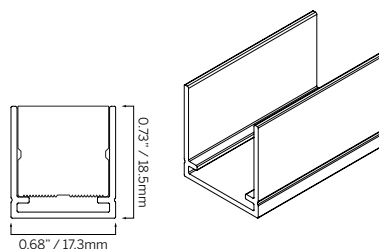

30

1000

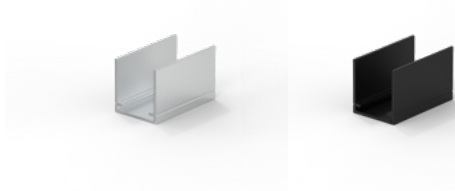


DRIVERS

TYPE Locking profile
MOUNTING Surface mount

ORDERING INFORMATION



MODEL	FINISH	LENGTH
63S1515X	5LP Silver	0035 35mm (1.38")
	2LP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
		2500 2500mm (98.43")
63S1515X		

ACCESSORIES

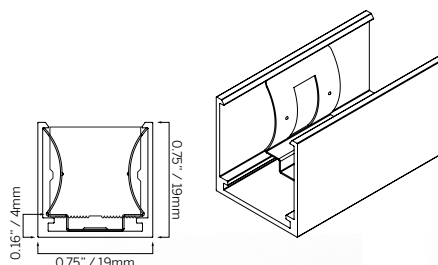

35


1000/2000/2500

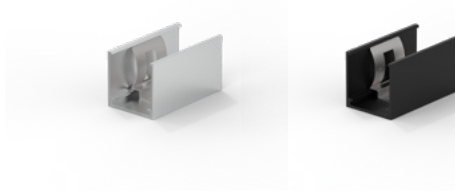

TYPE Deep Self Locking Profile
MOUNTING Surface mount


ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5LPC Silver	0035 35mm (1.38")
	2LPC Black	1000 1000mm (39.37")
63S1515X		



35

1000

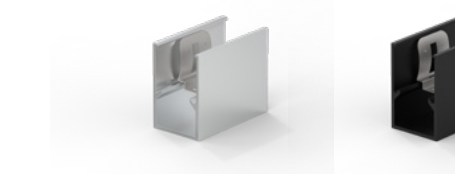

FLEX 15x15 VERTICAL BLACK

0.6x0.6"

inter•lux

STATIC
WHITE

ACCESSORIES

TYPE Stainless Mounting Clip
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515V	5SC Silver 2SC Black	0020 20mm (0.79")
63S1515V		0020



FREE
CUT

TUNABLE
WHITE

WARM
DIM

RGB/
RGBW

PIXEL



DRIVERS

IES
FILES

TYPE Stainless Bendable Profile
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515V	5SC Silver 2SC Black	1000 1000mm (39.37")
63S1515V		1000

ACCESSORIES

