


FLEX 16x17 HORIZONTAL HIGH TEMP


0.63x0.67"

inter•lux

STATIC
WHITE



Horizontal Bending

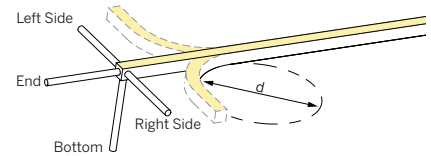

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS

STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm) [WORKING TEMP. -25°C TO 100°C (-13°F TO 212°F)]

DRIVER OPTIONS (See driver page for details)

DO10 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
S04	62.5 mm (2.5")	88	95	104	105	106	107	101
S05	50 mm (2")	63	83	90	98	99	100	101

ACCESSORIES

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63HTS1617H Flex 15x15 Horizontal High Temp	1 White	B18 1800K B24 2400K B27 2700K B30 3000K B35 3500K B40 4000K B60 6000K	S04 4 W/m (5m max.) 1.2 W/ft (16.4ft max.) S05 5 W/m (15m max.) 1.5 W/ft (49.2ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DO10 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63HTS1617H	1							

FLEX 16x17 HORIZONTAL HIGH TEMP

0.63x0.67"

inter•lux

STATIC WHITE

ACCESSORIES


TYPE

Locking Profile

MOUNTING

Surface mount

ORDERING INFORMATION			
MODEL	FINISH	LENGTH	
63S1617X	5LP Silver	0035	35mm (1.38")
		1000	1000mm (39.37")
63S1617X	5LP		

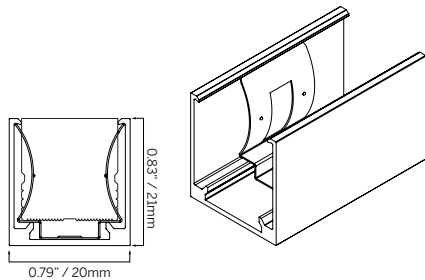

0035



1000



- DRIVERS
- IES FILES
- ACCESSORIES

TYPE

3D Stainless Steel

MOUNTING

Surface mount

ORDERING INFORMATION			
MODEL	FINISH	LENGTH	
63S1617X	5SC Silver	1000	1000mm (39.37")
63S1617X	5SC		1000

