



click images to open product pages



Flex 3x6 Horizontal
0.12x0.24" (IP65)

STATIC WHITE
Minimum Bend Diameter >1.18"
Length Increment: 0.98"
1.5 W/ft (19.7ft max.) up to 35 lm/ft
3 W/ft (13.1ft max.) up to 67 lm/ft



Flex 5x3 Vertical Domed
0.2x0.12" (IP65)

STATIC WHITE FREE CUT
Minimum Bend Diameter >1.18"
Length Increment: Free Cut
1.2 W/ft (23ft max.) up to 174 lm/ft
2.4 W/ft (16.4ft max.) up to 289 lm/ft
3.7 W/ft (13.1ft max.) up to 401 lm/ft

STATIC COLOR
Minimum Bend Diameter >1.18"
Length Increment: 1.96"
1.5 W/ft (16.4ft max.) up to 40 lm/ft
2.7 W/ft (9.8ft max.) up to 71 lm/ft
3.7 W/ft (9.8ft max.) up to 95 lm/ft
4.3 W/ft (8.2ft max.) up to 111 lm/ft



Flex 5x5 Vertical Domed
0.2x0.22" (IP65)

STATIC WHITE FREE CUT
Minimum Bend Diameter >1.18"
Length Increment: Free Cut
1.2 W/ft (23ft max.) up to 160 lm/ft
2.4 W/ft (16.4ft max.) up to 267 lm/ft
3.7 W/ft (13.1ft max.) up to 371 lm/ft

STATIC COLOR (RGB)
Minimum Bend Diameter >1.18"
Length Increment: 1.96"
1.5 W/ft (16.4ft max.) 55 / 162 / 38lm/ft
2.7 W/ft (9.8ft max.) 98 / 291 / 68 lm/ft
3.7 W/ft (9.8ft max.) 131 / 389 / 91 lm/ft
4.3 W/ft (8.2ft max.) 152 / 452 / 107 lm/ft



Flex 5x10 Horizontal
0.2x0.39" (IP67)

STATIC WHITE
Minimum Bend Diameter >1.18"
Length Increment: 2"
1.5 W/ft (26.2ft max.) up to 46 lm/ft
3 W/ft (16.4ft max.) up to 88 lm/ft
3 W/ft (26.2ft max.) up to 88 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >1.18"
Length Increment: 2"
3 W/ft (16.4ft max.) up to 104 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >1.18"
Length Increment: Free Cut
1.5 W/ft (24.6ft max.) up to 43 lm/ft
3 W/ft (16.4ft max.) up to 83 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >1.18"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 66 lm/ft

Warm Dim
Minimum Bend Diameter >1.18"
Length Increment: 2"
3 W/ft (16.4ft max.) up to 66 lm/ft



Flex 6x12 Horizontal
0.24x0.47" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >2.4"
Length Increment: 2"
1.5 W/ft (32.8ft max.) up to 49 lm/ft
3 W/ft (16.4ft max.) up to 93 lm/ft
1.5 W/ft (52.5ft max.) up to 49 lm/ft
3 W/ft (26.2ft max.) up to 93 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >2.4"
Length Increment: 2.5"
3 W/ft (23ft max.) up to 140 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >2.4"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 49 lm/ft
3 W/ft (23ft max.) up to 93 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 53 lm/ft

WARM DIM
Minimum Bend Diameter >3.9"
Length Increment: 2"
3.7 W/ft (16.4ft max.) up to 76 lm/ft



Flex 6x12 Horizontal Black
0.24x0.47" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >2.4"
Length Increment: 2"
1.5 W/ft (32.8ft max.) up to 10 lm/ft
3 W/ft (16.4ft max.) up to 18 lm/ft
1.5 W/ft (52.5ft max.) up to 10 lm/ft
3 W/ft (26.2ft max.) up to 18 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >2.4"
Length Increment: 2.5"
3 W/ft (23ft max.) up to 28 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >2.4"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 9 lm/ft
3 W/ft (23ft max.) up to 27 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 12 lm/ft

WARM DIM
Minimum Bend Diameter >3.9"
Length Increment: 2"
3.7 W/ft (16.4ft max.) up to 13 lm/ft



Flex 8x5 Vertical Domed
0.31x0.22" (IP65)

STATIC WHITE FREE CUT
Minimum Bend Diameter >1.18"
Length Increment: Free Cut
1.5 W/ft (32.8ft max.) up to 176 lm/ft
3 W/ft (23ft max.) up to 349 lm/ft
4.6 W/ft (16.4ft max.) up to 461 lm/ft

STATIC COLOR (RGB)
Minimum Bend Diameter >1.18"
Length Increment: 1.96"
1.5 W/ft (16.4ft max.) 57 / 167 / 39 lm/ft
2.7 W/ft (9.8ft max.) 101 / 301 / 71 lm/ft
3.7 W/ft (9.8ft max.) 135 / 401 / 94 lm/ft
4.3 W/ft (8.2ft max) 157 / 467 / 110 lm/ft



Flex 10x5 Vertical Domed
0.39x0.22" (IP67)

STATIC WHITE FREE CUT
Minimum Bend Diameter >1.18"
Length Increment: Free Cut
1.5 W/ft (32.8ft max.) up to 166 lm/ft
3 W/ft (23ft max.) up to 332 lm/ft
4.6 W/ft (16.4ft max.) up to 436 lm/ft



Flex 10x10 Multi
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
1.5 W/ft (19.7ft max.) up to 129 lm/ft
3 W/ft (13.1ft max.) up to 258 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
3 W/ft (13.1ft max.) up to 295 lm/ft



Flex 10x10 Multi Domed
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
1.5 W/ft (19.7ft max.) up to 163 lm/ft
3 W/ft (13.1ft max.) up to 331 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
3 W/ft (13.1ft max.) up to 379 lm/ft



Flex 10x10 Multi Honeycomb
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
1.5 W/ft (19.7ft max.) up to 16 lm/ft
3 W/ft (13.1ft max.) up to 32 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
3 W/ft (13.1ft max.) up to 37 lm/ft

click images to open product pages



Flex 10x10 Multi Dark Line
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
1.5 W/ft (19.7ft max.) up to 46 lm/ft
3 W/ft (13.1ft max.) up to 92 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >7.9"
Length Increment: 2.2"
3 W/ft (13.1ft max.) up to 105 lm/ft



Flex 10x10 Horizontal
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
1.5 W/ft (26.2ft max.) up to 96 lm/ft
3 W/ft (16.4ft max.) up to 186 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >3.9"
Length Increment: 2"
3 W/ft (16.4ft max.) up to 212 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >3.9"
Length Increment: Free Cut
1.5 W/ft (24.6ft max.) up to 88 lm/ft
3 W/ft (16.4ft max.) up to 171 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 115 lm/ft



Flex 10x10 Vertical
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
1.5 W/ft (32.8ft max.) up to 114 lm/ft
3 W/ft (16.4ft max.) up to 219 lm/ft
1.5 W/ft (52.5ft max.) up to 114 lm/ft
3 W/ft (26.2ft max.) up to 219 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >3.9"
Length Increment: 2.5"
3 W/ft (23ft max.) up to 331 lm/ft


STATIC WHITE FREE CUT
Minimum Bend Diameter >3.9"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 104 lm/ft
3 W/ft (23ft max.) up to 202 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 148 lm/ft



Flex 10x10 Vertical Black
0.39x0.39" (IP67 / IP20)

STATIC WHITE FREE CUT
Minimum Bend Diameter >3.9"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 11 lm/ft
3 W/ft (23ft max.) up to 21 lm/ft

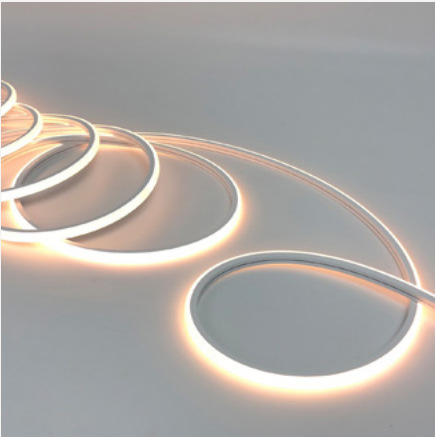

Flex 10x10 Vertical Domed
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
1.5 W/ft (32.8ft max.) up to 138 lm/ft
3 W/ft (16.4ft max.) up to 266 lm/ft
1.5 W/ft (52.5ft max.) up to 138 lm/ft
3 W/ft (26.2ft max.) up to 266 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >3.9"
Length Increment: 2.5"
3 W/ft (23ft max.) up to 401 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >3.9"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 126 lm/ft
3 W/ft (23ft max.) up to 245 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 177 lm/ft



Flex 10x10 Vertical Honeycomb
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
1.5 W/ft (32.8ft max.) up to 14 lm/ft
3 W/ft (16.4ft max.) up to 27 lm/ft
1.5 W/ft (52.5ft max.) up to 14 lm/ft
3 W/ft (26.2ft max.) up to 27 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >3.9"
Length Increment: 2.5"
3 W/ft (23ft max.) up to 41 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >3.9"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 13 lm/ft
3 W/ft (23ft max.) up to 24 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 18 lm/ft



Flex 10x10 Vertical Dark Line
0.39x0.39" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
1.5 W/ft (32.8ft max.) up to 41 lm/ft
3 W/ft (16.4ft max.) up to 78 lm/ft
1.5 W/ft (52.5ft max.) up to 41 lm/ft
3 W/ft (26.2ft max.) up to 78 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >3.9"
Length Increment: 2.5"
3 W/ft (16.4ft max.) up to 118 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >3.9"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 37 lm/ft
3 W/ft (23ft max.) up to 72 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >3.9"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 53 lm/ft



Flex 10x20 Horizontal
0.39x0.8" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >4.7"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 52 lm/ft
3.7 W/ft (19.7ft max.) up to 119 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >4.7"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 203 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >4.7"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 47 lm/ft
3.7 W/ft (19.7ft max.) up to 109 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >4.7"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 121 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >4.7"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 151 lm/ft
2x4 W/ft (9.8ft max.) up to 196 lm/ft

WARM DIM
Minimum Bend Diameter >4.7"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 98 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 15 / 40 / 9 lm/ft


RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 15 / 40 / 9 lm/ft up to 40 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 119 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 60 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7" 3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 10 / 28 / 6 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 3 /px / 3.9"
4.9 W/ft (16.4ft max.) 7 / 20 / 5 lm/ft up to 20 lm/ft white

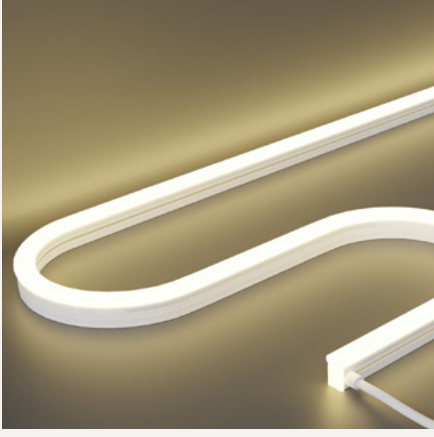

Flex 12x25 Horizontal Domed
0.47x0.98" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 62 lm/ft
3.7 W/ft (19.7ft max.) up to 144 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 244lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 56 lm/ft
3.7 W/ft (19.7ft max.) up to 130 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 113 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 180 lm/ft
2x4 W/ft (9.8ft max.) up to 235 lm/ft

WARM DIM
Minimum Bend Diameter >9.8"
Length Increment: 3.9"
4.3 W/ft (16.4ft max.) up to 117 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 18 / 48 / 11 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 18 / 48 / 11 lm/ft up to 48 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 146 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 71 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7" 3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 12 / 34 / 76 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 9 / 24 / 5 lm/ft up to 24 lm/ft white



click images to open product pages



Flex 15x15 Multi
0.6x0.6" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
1.5 W/ft (26.3ft max.) up to 97 lm/ft
3 W/ft (16.4ft max.) up to 188 lm/ft
STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 2"
3 W/ft (23ft max.) up to 261 lm/ft
STATIC WHITE FREE CUT
Minimum Bend Diameter >11.8"
Length Increment: Free Cut
1.5 W/ft (24.6ft max.) up to 89 lm/ft
3 W/ft (16.4ft max.) up to 173 lm/ft
TUNABLE WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
2x2.4 W/ft (16.4ft max.) up to 123 lm/ft



Flex 15x15 Multi High Temp
0.6x0.6" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
1.2 W/ft (16.4ft max.) up to 94 lm/ft



Flex 15x15 Horizontal
0.6x0.6" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 88 lm/ft
3.7 W/ft (19.7ft max.) up to 202 lm/ft
STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 79 lm/ft
3.7 W/ft (19.7ft max.) up to 183 lm/ft
TUNABLE WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 159 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 254 lm/ft
2x4 W/ft (9.8ft max.) up to 330 lm/ft
WARM DIM
Minimum Bend Diameter >11.8"
Length Increment: 2"
4.3 W/ft (16.4ft max.) up to 164 lm/ft
RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (19.7ft max.) 26 / 78 / 17 lm/ft



Flex 15x15 Horizontal
0.6x0.6" (IP67 / IP20)


STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (52.5ft max.) up to 7 lm/ft
3 W/ft (26.2ft max.) up to 15 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
3 W/ft (23ft max.) up to 23 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (36.1ft max.) up to 7 lm/ft
3 W/ft (23ft max.) up to 13 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
2x2.4 W/ft (16ft max.) up to 10 lm/ft

WARM DIM
Minimum Bend Diameter >11.8"
Length Increment: 2"
3.7 W/ft (16ft max.) up to 10 lm/ft

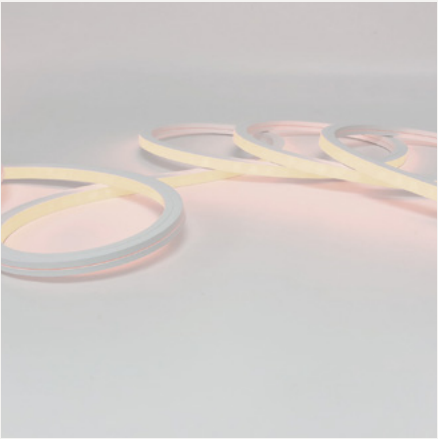

Flex 15x15 Vertical
0.6x0.6" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 76 lm/ft
3.7 W/ft (19.7ft max.) up to 176 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 298 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 69 lm/ft
3.7 W/ft (19.7ft max.) up to 160 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 138 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 221 lm/ft
2x4 W/ft (9.8ft max.) up to 287 lm/ft

WARM DIM
Minimum Bend Diameter >9.8"
Length Increment: 2"
4.3 W/ft (16.4ft max.) up to 144 lm/ft
RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 26 / 67 / 15 lm/ft
RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 26 / 67 / 15 lm/ft
up to 66 lm/ft white
PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 174 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 87 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7"
3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 15 / 41 / 10 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 11 / 29 / 7 lm/ft
up to 29 lm/ft white



Flex 15x15 Vertical Black
0.6x0.6" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (52.2ft max.) up to 7 lm/ft
3.7 W/ft (37.2ft max.) up to 16 lm/ft
STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 27 lm/ft
STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 6 lm/ft
3.7 W/ft (19.7ft max.) up to 15 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 13 lm/ft
TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 20 lm/ft
2x4 W/ft (9.8ft max.) up to 26 lm/ft

WARM DIM
Minimum Bend Diameter >9.8"
Length Increment: 2"
4.3 W/ft (16.4ft max.) up to 15 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (19.7ft max.) 2 / 5 / 1 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 2 / 5 / 1 lm/ft
up to 5 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 16 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 8 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7"
3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 1 / 4 / 1 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 11 / 29 / 7 lm/ft
up to 29 lm/ft white



Flex 16x17 Horizontal
0.63x0.67" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 83 lm/ft
3.7 W/ft (26.2ft max.) up to 191 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 2"
4.1 W/ft (16.4ft max.) up to 325 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 76 lm/ft
3.7 W/ft (19.7ft max.) up to 174 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 151 lm/ft
TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 241 lm/ft
2x4 W/ft (9.8ft max.) up to 313 lm/ft

WARM DIM
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 155 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (19.7ft max.) 24 / 65 / 15 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 24 / 65 / 15 lm/ft
up to 63 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 191 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 95 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7"
3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 17 / 45 / 10 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 12 / 32 / 7 lm/ft
up to 32 lm/ft white




Flex 16x17 Horizontal High Temp
0.63x0.67" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
1.2 W/ft (16.4ft max.) up to 107 lm/ft
Length Increment: 2.5"
1.5 W/ft (49.2ft max.) up to 101 lm/ft
Length Increment: 2"



click images to open product pages

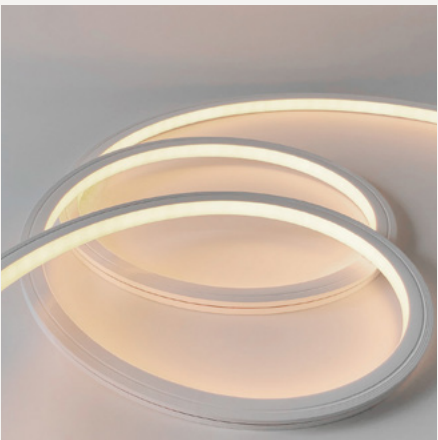

Flex 16x17 Vertical
0.63x0.67" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 87 lm/ft
3.7 W/ft (19.7ft max.) up to 200 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 338 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 78 lm/ft
3.7 W/ft (19.7ft max.) up to 181 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 157 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 251 lm/ft
2x4 W/ft (9.8ft max.) up to 326 lm/ft

WARM DIM
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 163 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 26 / 67 / 15 lm/ft


RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 26 / 67 / 15 lm/ft up to 66 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 199 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 99 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7" 3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 17 / 47 / 11 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 13 / 34 / 7 lm/ft up to 33 lm/ft white

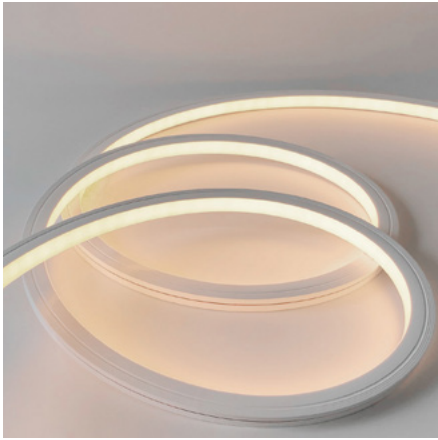

Flex 16x17 Vertical High Temp
0.63x0.67" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
1.2 W/ft (16.4ft max.) up to 112 lm/ft
Length Increment: 2.5"
1.5 W/ft (49.2ft max.) up to 104 lm/ft
Length Increment: 2"



Flex 16 Cove
0.63x0.63" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 112 lm/ft
3.7 W/ft (26.2ft max.) up to 260 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 440 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >9.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 102 lm/ft
3.7 W/ft (19.7ft max.) up to 235 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >9.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 204 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 326 lm/ft
2x4 W/ft (9.8ft max.) up to 424 lm/ft

WARM DIM
Minimum Bend Diameter >9.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 212 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 33 / 88 / 20 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 33 / 88 / 20 lm/ft up to 86 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 258 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 129 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7" 3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 23 / 61 / 14 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 16 / 44 / 10 lm/ft 41 lm/ft 3000K



Flex 20x18 Horizontal
0.79x0.71" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 71 lm/ft
3.7 W/ft (19.7ft max.) up to 163 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 2"
4.1 W/ft (16.4ft max.) up to 277 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >11.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 65 lm/ft
3.7 W/ft (19.7ft max.) up to 149 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 129 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 205 lm/ft
2x4 W/ft (9.8ft max.) up to 268 lm/ft

WARM DIM
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 155 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 21 / 55 / 12 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 21 / 55 / 12 lm/ft up to 52 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 191 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 81 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7" 3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 15 / 38 / 9 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 12 / 32 / 7 lm/ft up to 32 lm/ft white



Flex 20x18 Vertical
0.79x0.71" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 99 lm/ft
3.7 W/ft (19.7ft max.) up to 2274 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 386 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >11.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 89 lm/ft
3.7 W/ft (19.7ft max.) up to 206 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 179 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 286 lm/ft
2x4 W/ft (9.8ft max.) up to 372 lm/ft

WARM DIM
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 184 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 29 / 77 / 17 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 29 / 77 / 17 lm/ft up to 75 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 226 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 113 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7" 3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 20 / 53 / 12 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 15 / 38 / 9 lm/ft up to 38 lm/ft white



Flex 20x18 Vertical Black
0.79x0.71" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 6 lm/ft
3.7 W/ft (19.7ft max.) up to 14 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 24 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >11.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 5 lm/ft
3.7 W/ft (19.7ft max.) up to 13 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 11 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 18 lm/ft
2x4 W/ft (9.8ft max.) up to 23 lm/ft

WARM DIM
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 12 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 2 / 4 / 1 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 2 / / 1 lm/ft up to 5 lm/ft white



click images to open product pages



Flex 20x18 Vertical Domed
0.79x0.71" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 127 lm/ft
3.7 W/ft (19.7ft max.) up to 293 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 496 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >11.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 115 lm/ft
3.7 W/ft (19.7ft max.) up to 266 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 230 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 368 lm/ft
2x4 W/ft (9.8ft max.) up to 478 lm/ft

WARM DIM
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 238 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 37 / 99 / 23 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 37 / 99 / 23 lm/ft up to 97 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 291 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 146 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7"
3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 26 / 68 / 16 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 18 / 49 / 11 lm/ft up to 48 lm/ft white



Flex 20x18 Vertical Dark Line
0.79x0.71" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 37 lm/ft
3.7 W/ft (19.7ft max.) up to84 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 142 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >11.8"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 33 lm/ft
3.7 W/ft (19.7ft max.) up to 76 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >11.8"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 66 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 105 lm/ft
2x4 W/ft (9.8ft max.) up to 137 lm/ft

WARM DIM
Minimum Bend Diameter >11.8"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 68 lm/ft

RGB
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 11 / 28 / 6 lm/ft

RGBW
Minimum Bend Diameter >11.8"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 11 / 28 / 6 lm/ft up to 27 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 84 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 41 lm/ft

PIXEL - RGB
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7"
3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 7 / 20 / 5 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >11.8"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 5/ 14 / 4 lm/ft up to 13 lm/ft white



Flex 50x30 Multi
1.97x1.18"(IP67 / IP20)

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >31.5"
Length Increment: 2.8"
4.1 W/ft (16.4ft max.) up to 301 lm/ft



Flex 50x30 Vertical
1.97x1.18" (IP67 / IP20)

STATIC WHITE
Minimum Bend Diameter >19.7"
Length Increment: 2"
1.5 W/ft (49.2ft max.) up to 87 lm/ft
3.7 W/ft (19.7ft max.) up to 199 lm/ft

STATIC WHITE - HIGH OUTPUT
Minimum Bend Diameter >19.7"
Length Increment: 2.5"
4.1 W/ft (16.4ft max.) up to 338 lm/ft

STATIC WHITE FREE CUT
Minimum Bend Diameter >19.7"
Length Increment: Free Cut
1.5 W/ft (41ft max.) up to 79 lm/ft
3.7 W/ft (19.7ft max.) up to 181 lm/ft

TUNABLE WHITE
Minimum Bend Diameter >19.7"
Length Increment: 2.5"
2x2.9 W/ft (23ft max.) up to 157 lm/ft

TUNABLE WHITE - HIGH OUTPUT
Minimum Bend Diameter >19.7"
Length Increment: 3.3"
2x3 W/ft (13.1ft max.) up to 251 lm/ft
2x4 W/ft (9.8ft max.) up to 326 lm/ft

WARM DIM
Minimum Bend Diameter >19.7"
Length Increment: 3.3"
4.3 W/ft (16.4ft max.) up to 162 lm/ft

RGB
Minimum Bend Diameter >19.7"
Length Increment: 3.9"
3.7 W/ft (16.4ft max.) 26 / 67 / 15 lm/ft

RGBW
Minimum Bend Diameter >19.7"
Length Increment: 3.9"
4.9 W/ft (16.4ft max.) 26 / 67 / 15 lm/ft up to 66 lm/ft white

PIXEL - STATIC WHITE
Minimum Bend Diameter >19.7"
Pixels / DMX / Cut: 3.94" / 1 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 199 lm/ft

PIXEL - TUNABLE WHITE
Minimum Bend Diameter >19.7"
Pixels / DMX / Cut: 3.94" / 2 /px / 3.9"
4.1 W/ft (16.4ft max.) up to 99 lm/ft

PIXEL - RGB
Minimum Bend Diameter >19.7"
Pixels / DMX / Cut: 19.7" / 3 /px / 19.7"
3.94" / 3 /px / 3.9"
4.3 W/ft (16.4ft max.) 15 / 41 / 10 lm/ft

PIXEL - RGBW
Minimum Bend Diameter >19.7"
Pixels / DMX / Cut: 3.94" / 4 /px / 3.9"
4.9 W/ft (16.4ft max.) 11 / 29 / 7 lm/ft up to 29 lm/ft white