

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).




To prevent electrical shock, disconnect electrical supply before installation or servicing.
Never connect a live fixture!!!

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

Step 1 - Confirm Power Supply is Off!

- a** Unpack all luminaire units. Lay out all units in fixture “run.” The run is comprised of fixtures fitted with diffusers and brackets, one at each end. **Brackets** designed to fit Armstrong Axiom housings are **supplied** by Inter-lux. Housings are supplied by customer. Remote drivers and enclosures are supplied by Inter-lux.
- b** Check that each component is present by comparing against packing list.

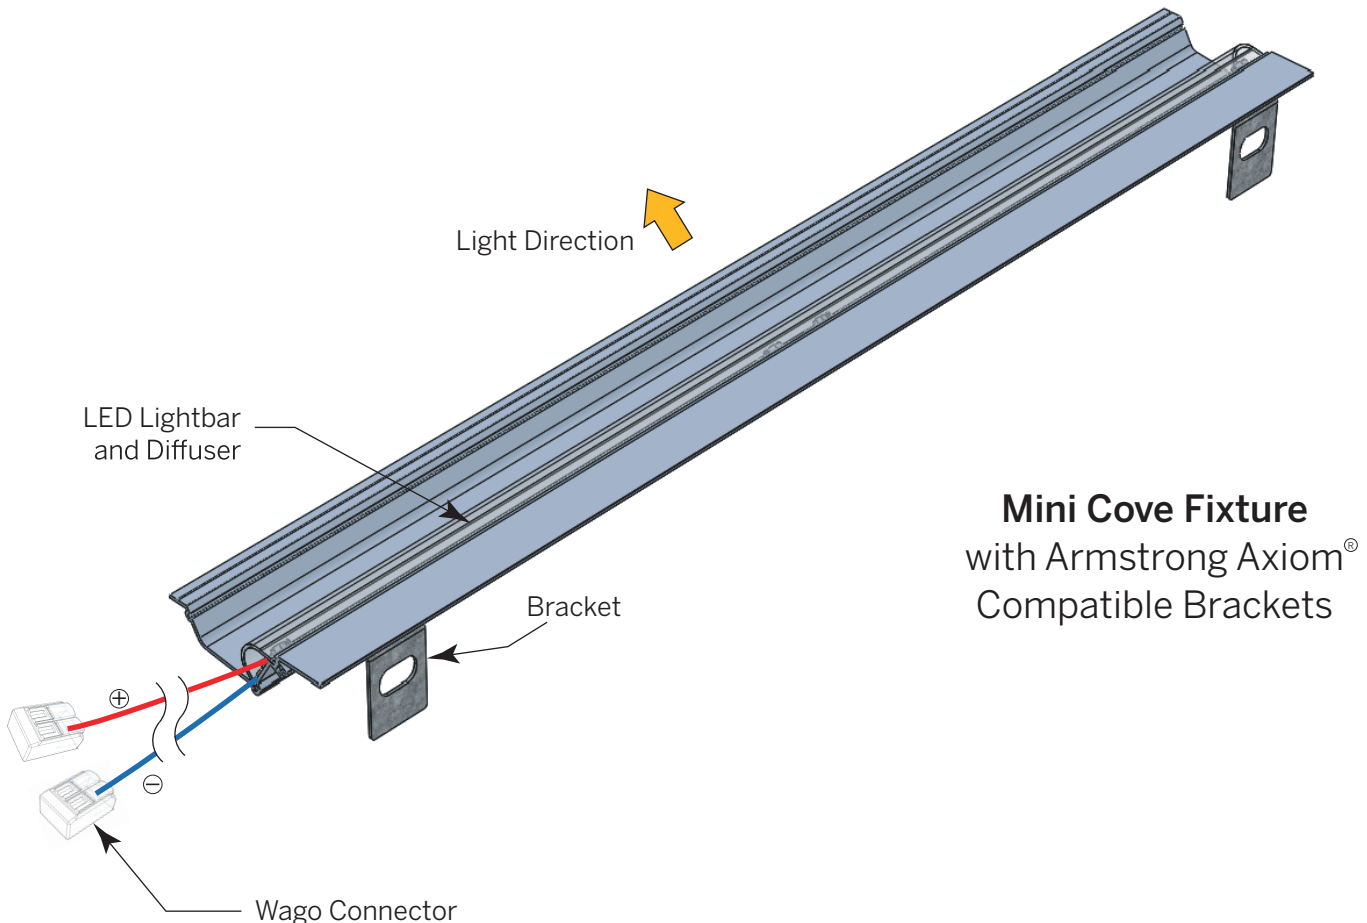

Need Help?

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).




To prevent electrical shock, disconnect electrical supply before installation or servicing.
Never connect a live fixture!!!

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

Step 2

Orient Mini Cove Fixture with Brackets as shown in illustrations below.

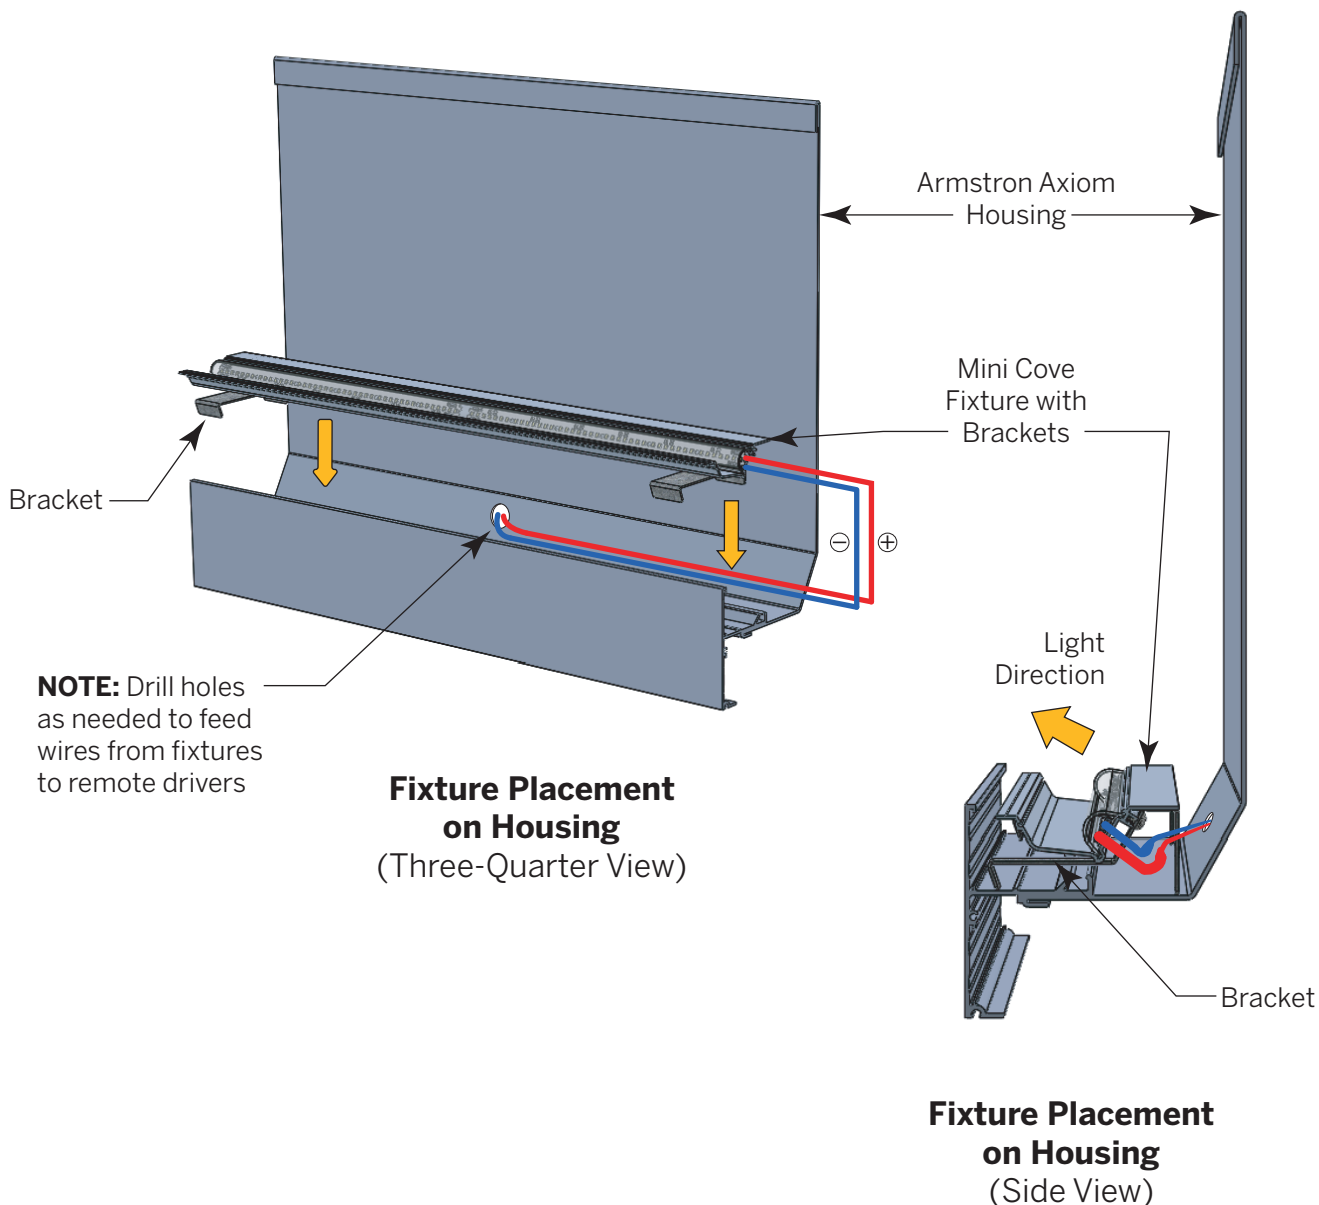


Need Help?

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).



To prevent electrical shock, disconnect electrical supply before installation or servicing.
Never connect a live fixture!!!

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

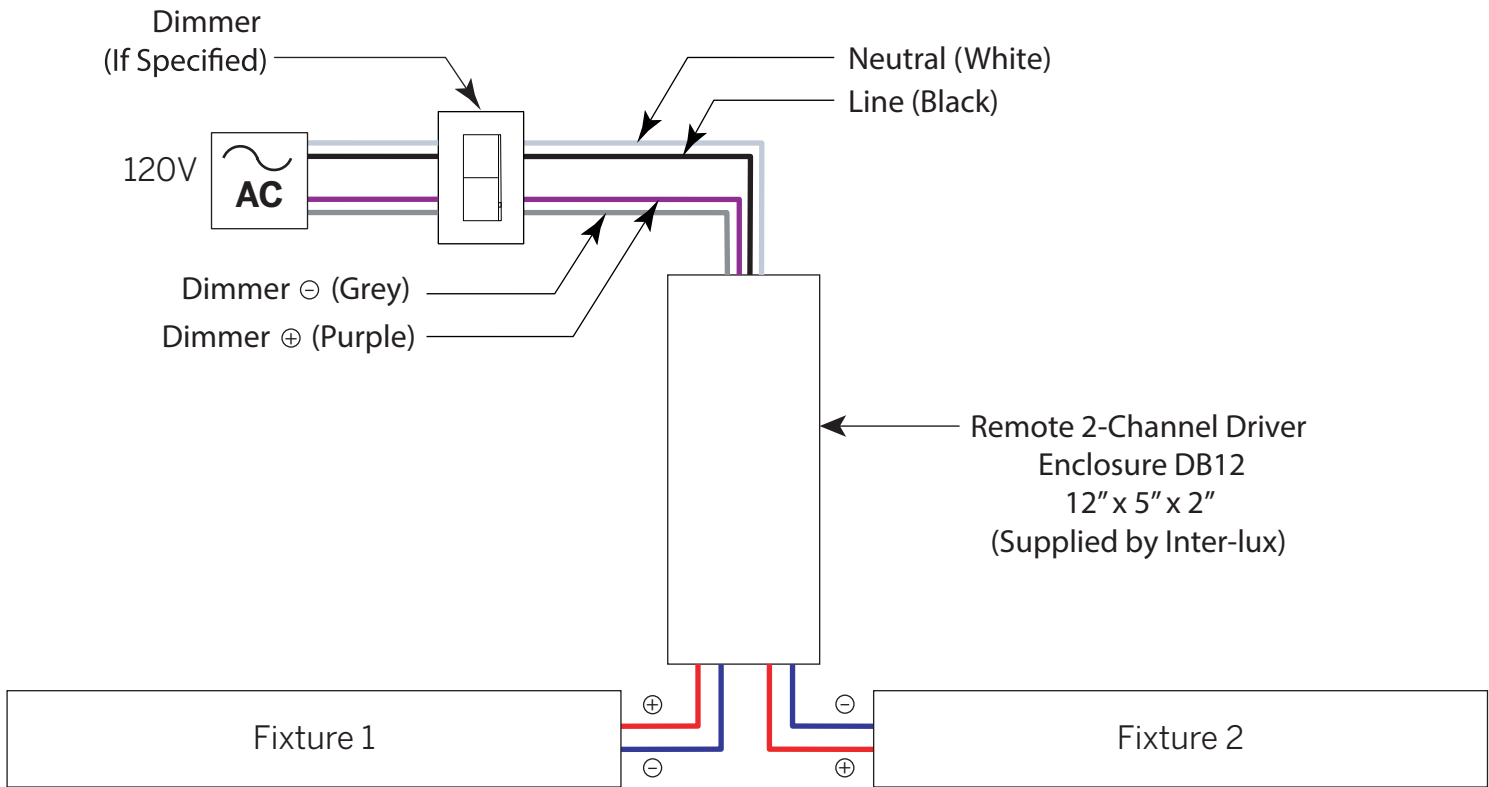

NOTE: Leads from Driver to Fixtures are Low Voltage

Red	Blue	Green	Black	White	Purple	Grey
⊕	⊖	Ground	Line	Neutral	Dim ⊕	Dim ⊖

Need Help?

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).




To prevent electrical shock, disconnect electrical supply before installation or servicing.
Never connect a live fixture!!!

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

Single & Multiple Fixture
Wiring Configurations


Single Driver/One Fixture

One Fixture Connected to One Channel

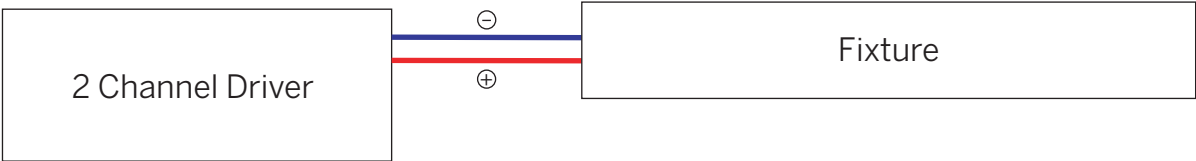

Single Driver/Two Fixtures

One Fixture Connected to Each Channel

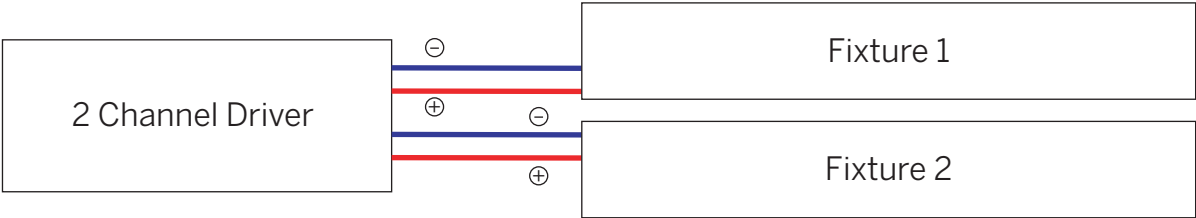

Need Help?