Buzzer Q

inter•lux

IP65 IK09 BUG Rating 0 MARINE GRADE

Contents

2	Single Emission product configurator diagrams / drivers
3	Quad Emission product configurator diagrams / drivers
4	photometry

General: Buzzer_Q is part of a comprehensive family of bollards and path markers designed for the most various applications, from pedestrian walkaways to public parks, commercial buildings and residential areas.
With no up-light component (Dark skies compliant), two distributions (180° and 360°) and multiple sizes available, Buzzer_Q can easily fit into every design.
Buzzer_Q's special optic design provides no shadows at the bottom of the fixture, making the ground evenly illuminated.

Fixture Body: Marine Grade. Open pore Anodized and Powder Coated Die-Cast Aluminum.
Diffuser: UV Resistant Polycarbonate.
Mounting: Standard Mounting Base (Provided with fixture). Ground peg available upon request.
Dimensions/Weight: 15.8" (4.41 lbs) – 27.6" (6.17 lbs) – 41.3" (7.72 lbs).

Driver: Remote, 120-277V Dimmable 0-10V.
Wattages: 5.5W (Single Emission) – 11.5W (Quad Emission).
Cable: Fixture comes with 4.17' of power cable.
Safety features: Fixture is equipped with Electrostatic discharge protection and Surge Protection (0.5 KV).

IP rating: IP65 for protection against dust and moderate water jets from any angle.
IK rating: IK 09
ETL Certification: ETL, wet location

Optics: Fixed, with Single (180°) or Quad (360°) Light Emission.
Color temperatures: 2200K – 2700K – 3000K – 4000K.
CRI: 80+
BUG Rating: B1-U0-G0 (Dark Sky Compliant)

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.
Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.



6.5" x 3" x 15.8"H
(SE 5.5W / QE 11.5W)



6.5" x 3" x 27.6"H
(SE 5.5W / QE 11.5W)



6.5" x 3" x 41.3"H
(SE 5.5W / QE 11.5W)

Delivered Lumens*	[6 - CC]	[12 - CC]
SE	525	–
QE	–	871

*Values shown for 3000K

linea light i-LED

Buzzer Q

inter•lux

SINGLE EMISSION

Mounting Accessories									
BZQ		SE		6 - CC		GE			
Product	**Trim**	**Type**	**Diameter**	**Wattage/Operation**	**Color Temp**	**Optic**	**+**	**Driver (Required)**	**Mounting Accessories (optional)**
BZQ = Buzzer Q	RBOBG = Rectangular Bollard, Black Grey RBOGR = Rectangular Bollard, Grey RBODB = Rectangular Bollard, Dark Brown	SE = Single Emission	16 = 6.5" X 3"X 15.8"H 28 = 6.5" X 3"X 27.6"H 41 = 6.5" X 3"X 41.3"H	6 CC = 5.5W / Constant Current (300mA)	22 = 2200K 27 = 2700K 30 = 3000K 40 = 4000K	GE = General Emission		ECO30W-300 SOLO50W-300 SOLO100W-300	W-F900004 (anchor bolts)

6.5" x 3" x 15.8"H 5.5W 300mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-300
0-10V EldoLED
ECOdrive 30W
for 1-2 fixtures

SOLO50W-300
0-10V EldoLED
SOLOdrive 50W
for 1-4 fixtures

SOLO100W-300
0-10V EldoLED
SOLOdrive 100W
for 1-8 fixtures

6.5" x 3" x 27.6"H 5.5W 300mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-300
0-10V EldoLED
ECOdrive 30W
for 1-2 fixtures

SOLO50W-300
0-10V EldoLED
SOLOdrive 50W
for 1-4 fixtures

SOLO100W-300
0-10V EldoLED
SOLOdrive 100W
for 1-8 fixtures

6.5" x 3" x 41.3"H 5.5W 300mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-300
0-10V EldoLED
ECOdrive 30W
for 1-2 fixtures

SOLO50W-300
0-10V EldoLED
SOLOdrive 50W
for 1-4 fixtures

SOLO100W-300
0-10V EldoLED
SOLOdrive 100W
for 1-8 fixtures

Mounting Accessories



W-F900004
(ground peg)

Buzzer Q

inter•lux

QUAD EMISSION

Mounting Accessories									
BZQ		QE		12 - CC		GE			
Product	**Trim**	**Type**	**Diameter**	**Wattage/Operation**	**Color Temp**	**Optic**	**+**	**Driver (Required)**	**Mounting Accessories (optional)**
BZQ = Buzzer Q	RBOBG = Rectangular Bollard, Black Grey RBOGR = Rectangular Bollard, Grey RBODB = Rectangular Bollard, Dark Brown	QE = Quad Emission	16 = 6.5" X 3" X 15.8"H 28 = 6.5" X 3" X 27.6"H 41 = 6.5" X 3" X 41.3"H	12 CC = 11.5W / Constant Current (700mA)	22 = 2200K 27 = 2700K 30 = 3000K 40 = 4000K	GE = General Emission		ECO30W-700 SOLO50W-700 SOLO100W-700	W-F900004 (anchor bolts)

6.5" x 3" x 15.8"H 11.5W 700mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700	**SOLO50W-700**	**SOLO100W-700**
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

6.5" x 3" x 27.6"H 11.5W 700mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700	**SOLO50W-700**	**SOLO100W-700**
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

6.5" x 3" x 41.3"H 11.5W 700mA



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700	**SOLO50W-700**	**SOLO100W-700**
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Mounting Accessories



W-F900004
(ground peg)

BZQ-QBOBG-SE-41-5-CC-30-GE

0.5fc

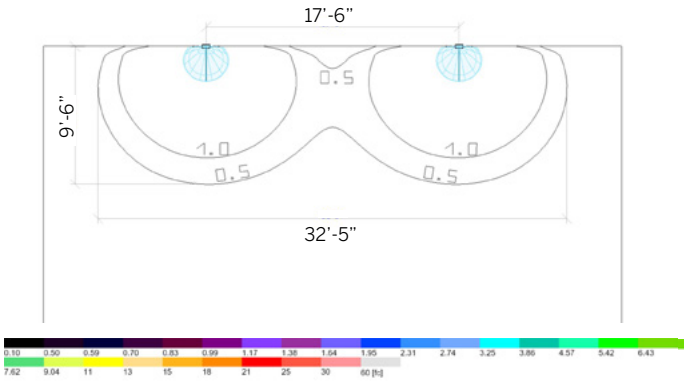

1fc

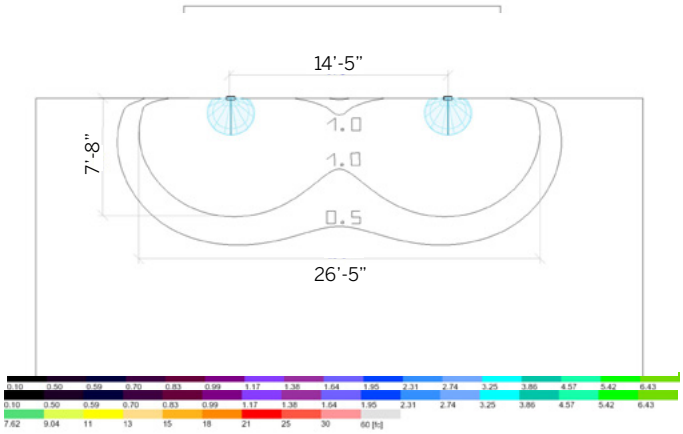

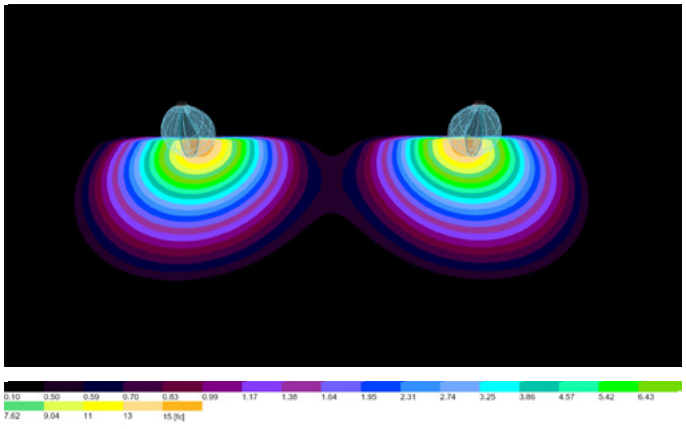

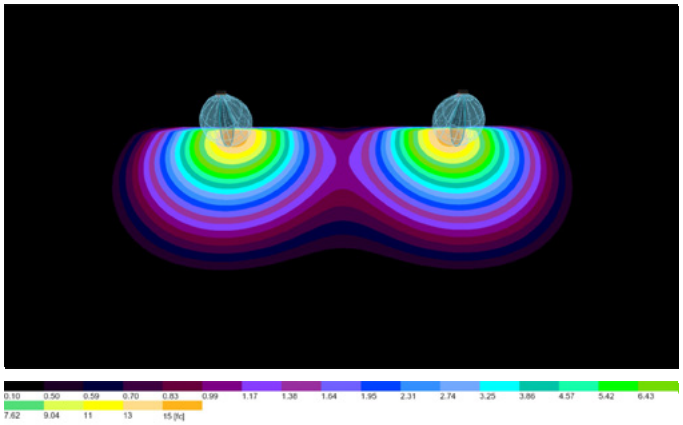

BZQ-QBOBG-QE-41-12-CC-30-GE

0.5fc

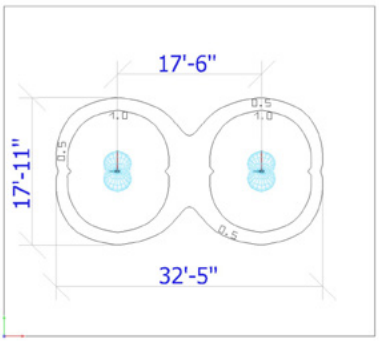



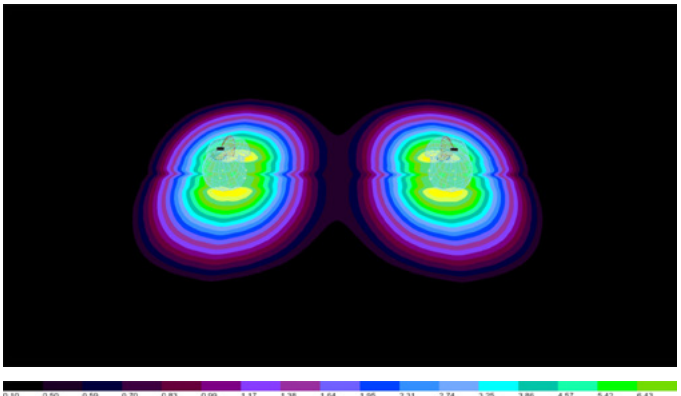


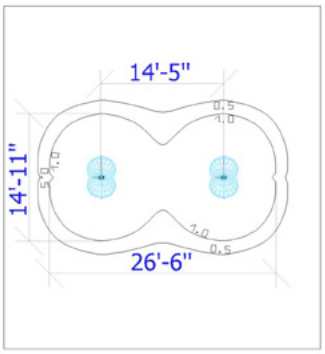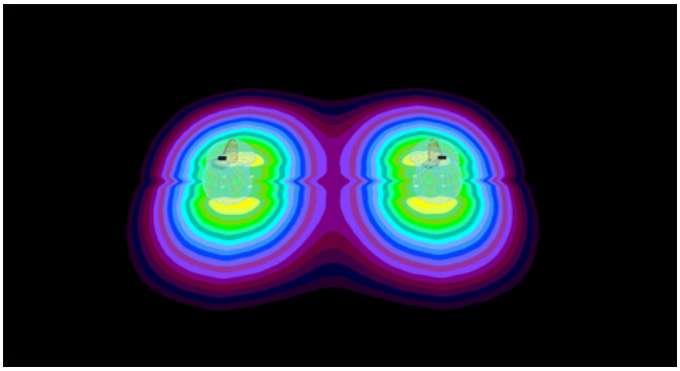
1fc