1.5" ProTools Downlight
Round Recessed


inter•lux



Recessed Plaster Trim (RPT)




Recessed Bezel Trim (RBT)

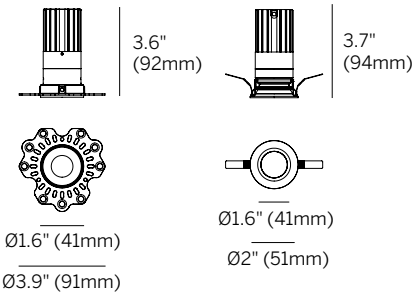

Plaster Trim (RPT)
Cutout: Ø2.1" (54mm)

Bezel Trim (RBT)
Cutout: Ø1.8" (45mm)



SOL LSL HL

Ordering Information											
WG-40RPTDL		M	92			RRC					
Model	**Fixation**	**Power**[2]	**CRI**	**CCT**[3]	**Driver**[4,5]	**Cover**	**Lens**	**Beam**	**Trim Finish**	**Housing**[5]	**Options**
WG-40RPTDL	RBT RPT RTTBT[1] OTTPT[1] OTTWC[1]	M	92	27 30 35 40 WD	S010* D010* SPH* PEQ0* D2S* X	RRC	OA[6] SOL[6] LSL[6] HL[6]	20 25 35 50	W (std) B S F	LP NC IC CP X	WL TM EM AWNRF

*Add 'R' for remote driver, ex. 'RS010'

Luminaire
- Part of a complete family of 1.5" aperture matching downlights.
- 1.6" round aperture recessed downlight with 0.9" light aperture regressed 0.5" from ceiling plane.
- Efficacy up to 83 lumens per watt (delivered)
- UGR < 19 for some configurations to comply with WELL requirements.
- CREE 3-step MacAdam LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85°C) Static White 33,300 hours. Warm Dim 55,000 hours.
- ETL and ETL-C for dry and damp locations, Wet location optional.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1.25".
- Housings available (see housings page).
- 5-year warranty.

Fixation
- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim
- RTTBT = Rectangular Twin Trim with Bezel Trim[1]
- OTTPT = Oval Twin Trim with Plaster Trim[1]
- OTTWC = Oval Twin Trim with Wood Ceiling Trim[1]

Power[2]
- M = Mid Power, 9.1W @ 500mA

CRI
- 92 = 92 CRI

CCT[3]
- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Integral Driver NC / IC / CP Housings Accessible Ceiling[4,5]
- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver for NC / LP / IC / CP[4,5]
- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RSPH = Remote phase (2-wire) 3% dimming, 120V only (20W)
- RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

Cover
- RRC = Round Recessed Cone

Lens
- OA = Open Aperture (beam softening lens provided standard)
- SOL = Solite Lens[6]
- LSL = Linear Spread Lens[6]
- HL = Honeycomb Louver[6]

Beam
- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

Trim Finish
- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Housing (optional)[5]
- LP = Landing Pan (for remote driver)
- NC = New Construction Housing (integral driver for accessible ceilings only)
- IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)
- CP = Chicago Plenum Housing (integral driver for accessible ceilings only)
- X = No Housing

Options
- WL = Wet Location
- TM = Thin Metal Ceiling Clip
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

1. Twin Trim will be provided with 2 matching fixtures, unless specified otherwise. OTTWC can accommodate from 3/8 to 1 inch thick ceilings.
2. Wattage shown does not include power supplies / drivers.
3. See photometric data sheet for delivered lumens.
4. See driver information for details.
5. See housings pages for detail.
6. One accessory per fixture.