

1.5" ProTools Downlight
Round Suspended Cylinder

inter•lux

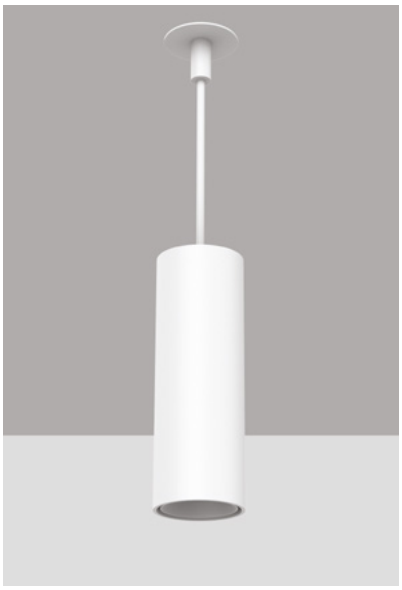


Ordering Information												
WG-40RPTDL	S		M	92			RRC					


Model	Suspension	Canopy	Power[1]	CRI	CCT[2]	Driver[3]	Cover	Lens	Beam	Cover Finish	Housing Finish	Options
WG-40RPTDL	S	2 5	M	92	27 30 35 40 WD	RS010 RD010 RSPH RPEQ0 RD2S X	RRC	OA[4] SOL[4] LSL[4] HL[4]	20 25 35 50	W B S F	W B S F	EM AWNRF

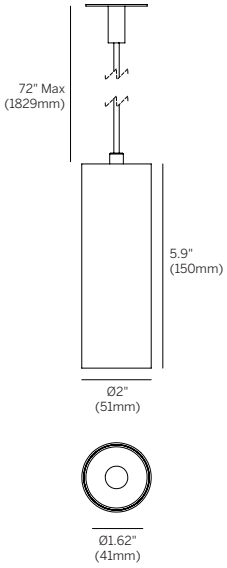


Canopy



2" dia



5" dia for
4" j-box



SOL LSL HL

Luminaire
- Part of a complete family of 1.5" aperture matching downlights.
- 2" diameter suspended cylinder downlight with 1.6" round aperture with 0.8" light aperture regressed 0.5" from bottom of fixture.
- Efficacy up to 83 lumens per watt (delivered).
- UGR < 19 for some configurations to comply with WELL requirements.
- CREE 3-step MacAdam LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85ºC) Static White 33,300 hours. Warm Dim 55,000 hours.
- ETL and ETL-C for dry and damp locations.
- Housings available (see housings page).
- 5-year warranty.

Suspension
- S = Suspension, 72" standard length, field adjusted

Canopy
- 2 = 2" dia. surface mount
- 5 = 5" dia. for 4" j-box

Power[1]
- M = Mid Power, 9.1W @ 500mA

CRI
- 92 = 92 CRI

CCT[2]
- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Remote Driver[3]
- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RSPH = Remote phase (2-wire) 3% dimming, 120V only (20W)
- RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

Cover
- RRC = Round Recessed Cone

Lens
- OA = Open Aperture (beam softening lens provided standard)
- SOL = Solite Lens[4]
- LSL = Linear Spread Lens[4]
- HL = Honeycomb Louver[4]

Beam
- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

Cover Finish
- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Housing Finish
- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

1. Wattage shown does not include power supplies / drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information page for details.
4. One accessory per fixture.