

1.5" **ProTools Downlight** Round Suspended Cylinder



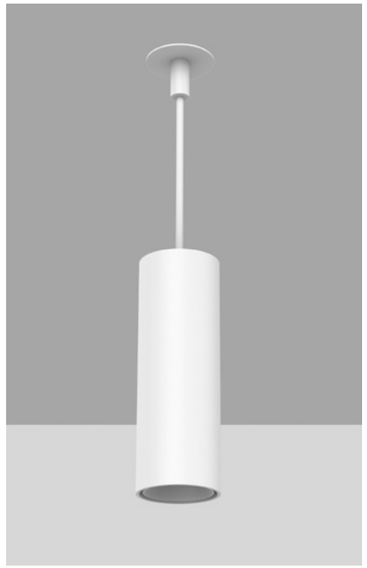


2" diameter suspended cylinder downlight with 1.5" round aperture with 0.8" light aperture regressed 0.5" from bottom of fixture.


Luminaire	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation
Suspension	72" standard length suspension, field adjusted 2" dia. surface mount, or 5" dia. for 4" j-box
Cover	RRC - Round Recessed Cone for low brightness, general illumination with angled cone
LED	Constant Current, 92+ CRI (standard), 2-Step MacAdam Mid output (delivers up to 83 lumens per watt) 2700K, 3000K, 3500K, 4000K Warm Dim (1800 - 3000K) L70 (TM21 Projected 85º C) Static White = 33,300 hours, WD = 55,000 hours
Beam	20º, 25º, 35º, 50º
Driver	Remote drivers for all Dimming and non-Dimming applications Non-Dim, 0-10V, Phase, Lutron, DALI driver options POE driver compatibility
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

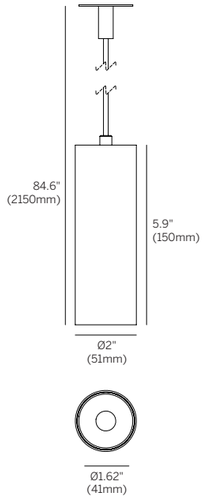

Canopy



2" dia



5" dia for
4" j-box

1.5" **ProTools Downlight** Round Suspended Cylinder

Model	Suspension	Canopy	Power[1]	CRI	CCT[2]	Driver[3]	Cover	Lens	Beam	Housing Finish	Reflector Finish	Options
WG-40RPTDL	S	2 5	M	92	27 30 35 40 WD	RS010 RD010 RSPH RPEQ0 RD2S X	RRC	OA[4] SOL[4] LSL[4] HL[4]	20 25 35 50	W (std) B S F	W (std) B S F	EM AWNRF

Model
- WG-40RPTDL = 1.5" ProTools Downlight Round Suspended Cylinder

Suspension
- S = Suspension, 72" standard length, field adjusted

Canopy
- 2 = 2" dia. surface mount
- 5 = 5" dia. for 4" j-box

Power[1]
- M = Mid Power, 9.1W @ 500mA

CRI
- 92 = 92 CRI

CCT[2]
- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Remote Driver[3]
- RS010 = Remote eldoLED 0-10V 1% Dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% Dimming, 120-277V (22W, 50W or 100W)
- RSPH = Remote phase (2-wire) 3% Dimming, 120V only (20W)
- RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem Dimming, 120-277V (20W)
- RD2S = Remote DALI-2 (DT6) for Static White 0.1% Dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

Cover
- RRC = Round Recessed Cone

Lens
- OA = Open Aperture (beam softening lens provided standard)
- SOL = Solite Lens[4]
- LSL = Linear Spread Lens[4]
- HL = Honeycomb Louver[4]

Beam
- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

Housing Finish
- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Reflector Finish
- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

Whitegoods reserves the right to change any information without prior notice.

Notes
1. Wattage shown does not include power supplies / drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information page for details.
4. One accessory per fixture.

technical information