

3" ProTools+ Adjustable Square Recessed (Static White)



3" square aperture recessed adjustable downlight, high output, Static White, with asymmetric cone cover and optional lens accessories.


Luminaire	Part of a complete family of 3" aperture high output downlights 3" square aperture recessed adjustable downlight Luminaire installed and maintained from below the ceiling Maximum ceiling thickness 1"
Fixation	RPT = Recessed Plaster Trim RBT = Recessed Bezel Trim
Cover	SAC = Square Asymmetric Cone
Lens	OA = Open Aperture SOL = Solite Lens LSL = Linear Spread Lens HL = Honeycomb Louver
LED	CREE 2-step MacAdam LEDs, efficacy up to 137 lumens per watt (delivered) CRI 92+ standard Low / Mid / High / High Plus / Super High output 2400K, 2700K, 3000K, 3500K, 4000K L70 (TM21 Projected 85°C) Static White = 60,000 hours
Beam	15°, 25°, 35° and 50° beam spreads
Driver	Integral and remote 0-10V, Phase and DALI-2 drivers
Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling* CP - Chicago Plenum *Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp locations



Recessed Plaster Trim (RPT)




Recessed Bezel Trim (RBT)

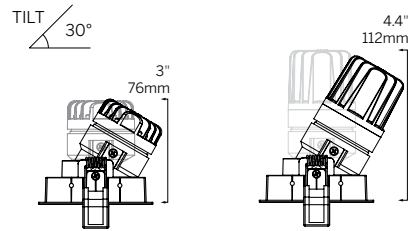


Low / Mid Power

High Power



High Plus / Super High Power



3" ProTools+ Adjustable Square Recessed (Static White)

Model	Fixation	Power ¹	CRI	CCT ²	Driver ³	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing ⁴	Options
WG-80SPTA	RPT RBT	L M H HP SH	92	24 27 30 35 40	S010 D010 SPH D2S RS010 RD010 RD2S X	SAC	OA SOL LSL HL	15 25 35 50	W B S	MW MB SC BC	LP NC IC CP X	EM AWNRF

Model

- WG-80SPTA = 3" ProTools+ Adjustable Square Recessed (Static White)

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power¹

- L = Low Power, 6.3W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA
- HP = High Plus Power, 16.0W @ 450mA
- SH = Super High Power, 20.0W @ 550mA

CRI

- 92 = 92 CRI

CCT²

- 24 = 2400K
- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

Integral Driver³

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W) (N/A for M or SH power)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver³

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

Cover

- SAC = Square Asymmetric Cone

Lens (1 accessory/lens per fixture)

- OA = Open Aperture
- SOL = Solite Lens
- LSL = Linear Spread Lens
- HL = Honeycomb Louver

Beam

- 15 = 15° Beam Angle (20° HP / SH)
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

Trim Finish

- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish

- MW = Matte White (standard)
- MB = Matte Black
- SC = Silver Chrome
- BC = Black Chrome

Housing (Optional)⁴

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.


- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options

- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

Notes

- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See driver information for details.
- See housings pages for details.



3" ProTools+ Adjustable Square Recessed (Tunable White)



3" square aperture recessed adjustable downlight, high output, Tunable White, with asymmetric cone cover and optional lens accessories.



Luminaire	Part of a complete family of 3" aperture high output downlights 3" square aperture recessed adjustable downlight Luminaire installed and maintained from below the ceiling Maximum ceiling thickness 1"
Fixation	RPT = Recessed Plaster Trim RBT = Recessed Bezel Trim
Cover	SAC = Square Asymmetric Cone
Lens	OA = Open Aperture SOL = Solite Lens LSL = Linear Spread Lens HL = Honeycomb Louver
LED	Bridgelux LEDs CRI 92+ standard Low / Mid / High output Tunable White (1800K - 4000K or 2700K - 6500K) L70 (TM21 Projected 85°C) Tunable White = 50,000 hours
Beam	20°, 25°, 40° and 50° beam spreads
Driver	Remote DALI-2 (DT8) driver
Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling* CP - Chicago Plenum *Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp locations



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

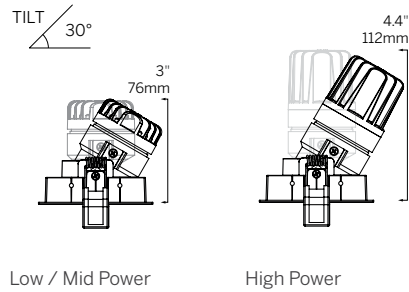

3" ProTools+ Adjustable Square Recessed (Tunable White)

Model	Fixation	Power ¹	CRI	CCT ²	Driver ³	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing ⁴	Options
WG-80SPTA	RPT RBT	L M H	92	TW1840 TW2765	RD2T X	SAC	OA SOL LSL HL	20 25 40 50	W B S	MW MB SC BC	LP NC IC CP X	EM AWNRF

Model

- WG-80SPTA = 3" ProTools+ Adjustable Square Recessed (Tunable White)

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power¹

- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

CRI

- 92 = 92 CRI

CCT²

- TW1840 = Tunable White 1800K - 4000K
- TW2765 = Tunable White 2700K - 6500K

Remote Driver³

- RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W)
- X = No driver

Cover

- SAC = Square Asymmetric Cone

Lens (1 accessory/lens per fixture)

- OA = Open Aperture
- SOL = Solite Lens
- LSL = Linear Spread Lens
- HL = Honeycomb Louver

Beam

- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 40 = 40° Beam Angle
- 50 = 50° Beam Angle

Trim Finish

- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish

- MW = Matte White (standard)
- MB = Matte Black
- SC = Silver Chrome
- BC = Black Chrome

Housing (Optional)⁴

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.


- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options

- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RD2T drivers only)

Notes

- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See driver information for details.
- See housings pages for details.



3" ProTools+ Adjustable
Square Recessed (Warm Dim)



3" square aperture recessed adjustable downlight, high output, Warm Dim, with asymmetric cone cover and optional lens accessories.


Luminaire	Part of a complete family of 3" aperture high output downlights 3" square aperture recessed adjustable downlight Luminaire installed and maintained from below the ceiling Maximum ceiling thickness 1"
Fixation	RPT = Recessed Plaster Trim RBT = Recessed Bezel Trim
Cover	SAC = Square Asymmetric Cone
Lens	OA = Open Aperture SOL = Solite Lens LSL = Linear Spread Lens HL = Honeycomb Louver
LED	Bridgelux LEDs CRI 92+ standard Low / Mid / High output Warm Dim (2700K - 1800K or 3000K - 1800K) L70 (TM21 Projected 85°C) Warm Dim = 50,000 hours
Beam	15°, 25°, 35° and 50° beam spreads
Driver	Integral and remote 0-10V, Phase and DALI-2 drivers
Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling* CP - Chicago Plenum *Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp locations



Recessed Plaster Trim (RPT)




Recessed Bezel Trim (RBT)

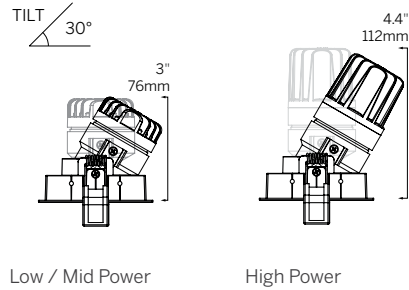

Low / Mid Power

High Power



3" ProTools+ Adjustable
Square Recessed (Warm Dim)

Model	Fixation	Power ¹	CRI	CCT ²	Driver ³	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing ⁴	Options
WG-80SPTA	RPT RBT	L M H	92	WD2718 WD3018	S010 D010 SPH D2S RS010 RD010 RD2S X	SAC	OA SOL LSL HL	15 25 35 50	W B S	MW MB SC BC	LP NC IC CP X	EM AWNRF

Model

- WG-80SPTA = 3" ProTools+ Adjustable Square Recessed (Warm Dim)

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power¹

- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

CRI

- 92 = 92 CRI

CCT²

- WD2718 = Warm Dim 2700K - 1800K
- WD3018 = Warm Dim 3000K - 1800K

Integral Driver³

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W) (N/A for M power)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver³

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

Cover

- SAC = Square Asymmetric Cone

Lens (1 accessory/lens per fixture)

- OA = Open Aperture
- SOL = Solite Lens
- LSL = Linear Spread Lens
- HL = Honeycomb Louver

Beam

- 15 = 15° Beam Angle (20° M / H)
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle (40° M / H)
- 50 = 50° Beam Angle

Trim Finish

- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish

- MW = Matte White (standard)
- MB = Matte Black
- SC = Silver Chrome
- BC = Black Chrome

Housing (Optional)⁴

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options

- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

Whitegoods reserves the right to change any information without prior notice.

Notes

1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details.

