
3" ProTools+ Wall Wash
Round Recessed (Static White)



3" round aperture recessed wall washer, high output, Static White, with wall wash cover and spread lens.


Luminaire	Part of a complete family of 3" aperture high output downlights 3" round aperture recessed wall washer Luminaire installed and maintained from below the ceiling Maximum ceiling thickness 1"
Fixation	RPT = Recessed Plaster Trim RBT = Recessed Bezel Trim
Cover	RWW = Round Wall Wash
Lens	WWL = Wall Wash Spread Lens
LED	CREE 2-step MacAdam LEDs, efficacy up to 95 lumens per watt (delivered) CRI 92+ standard Low / Mid / High / High Plus / Super High output 2400K, 2700K, 3000K, 3500K, 4000K L70 (TM21 Projected 85°C) Static White = 60,000 hours
Beam	WW = Wall Wash
Driver	Integral and remote 0-10V, Phase and DALI-2 drivers
Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling* CP - Chicago Plenum **Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.*
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp locations

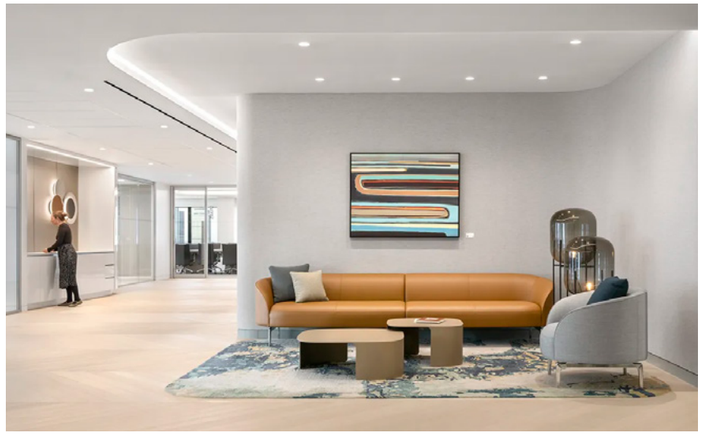

Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

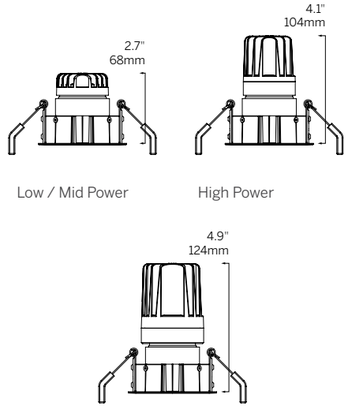

3" ProTools+ Wall Wash
Round Recessed (Static White)

Model	Fixation	Power[1]	CRI	CCT[2]	Driver[3]	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing[4]	Options
WG-80RPTWW	RPT RBT	L M H HP SH	92	24 27 30 35 40	S010 D010 SPH D2S RS010 RD010 RD2S X	RWW	WWL	WW	W B S	MW SC	LP NC IC CP X	EM AWNRF

Model
- WG-80RPTWW = 3" ProTools+ Wall Wash Round Recessed (Static White)

Fixation
- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power[1]
- L = Low Power, 6.3W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA
- HP = High Plus Power, 16.0W @ 450mA
- SH = Super High Power, 20.0W @ 550mA

CRI
- 92 = 92 CRI

CCT[2]
- 24 = 2400K
- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

Integral Driver[3]
- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W) (N/A for M or SH power)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver[3]
- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

Cover
- RWW = Round Wall Wash

Lens
- WWL = Wall Wash Spread Lens

Beam
- WW = Wall Wash

Trim Finish
- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish
- MW = Matte White (standard)
- SC = Silver Chrome

Housing (Optional)[4]

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing


Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

Whitegoods reserves the right to change any information without prior notice.

Notes
1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details.

technical information

3" ProTools+ Wall Wash
Round Recessed (Tunable White)

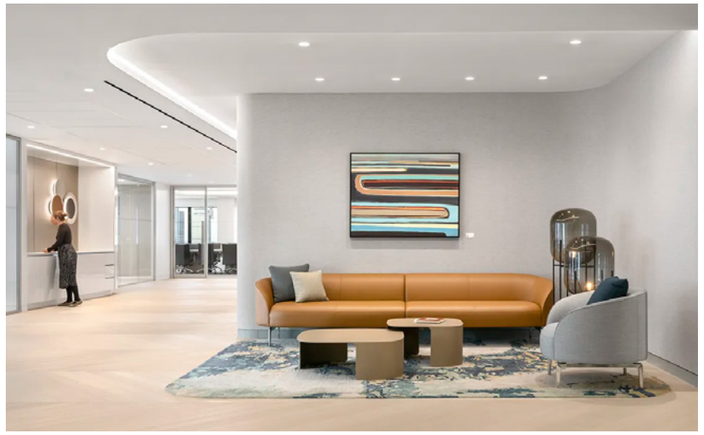

3" round aperture recessed wall washer, high output, Tunable White, with wall wash cover and spread lens.


Luminaire	Part of a complete family of 3" aperture high output downlights 3" round aperture recessed wall washer Luminaire installed and maintained from below the ceiling Maximum ceiling thickness 1"
Fixation	RPT = Recessed Plaster Trim RBT = Recessed Bezel Trim
Cover	RWW = Round Wall Wash
Lens	WWL = Wall Wash Spread Lens
LED	Bridgelux LEDs CRI 92+ standard Low / Mid / High output Tunable White (1800K - 4000K or 2700K - 6500K) L70 (TM21 Projected 85°C) Tunable White = 50,000 hours
Beam	WW = Wall Wash
Driver	Remote DALI-2 (DT8) driver
Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling* CP - Chicago Plenum **Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.*
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp locations



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

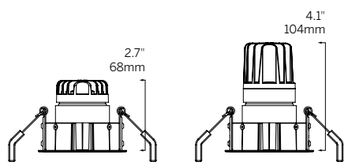

Low / Mid Power High Power

CUTOUT
Ø3.1" / 80mm

3" ProTools+ Wall Wash
Round Recessed (Tunable White)

Model	Fixation	Power[1]	CRI	CCT[2]	Driver[3]	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing[4]	Options
WG-80RPTWW	RPT RBT	L M H	92	TW1840 TW2765	RD2T X	RWW	WWL	WW	W B S	MW SC	LP NC IC CP X	EM AWNRF

Model
- WG-80RPTWW = 3" ProTools+ Wall Wash Round Recessed (Tunable White)

Fixation
- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power[1]
- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

CRI
- 92 = 92 CRI

CCT[2]
- TW1840 = Tunable White 1800K - 4000K
- TW2765 = Tunable White 2700K - 6500K

Remote Driver[3]
- RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W)
- X = No driver

Cover
- RWW = Round Wall Wash

Lens
- WWL = Wall Wash Spread Lens

Beam
- WW = Wall Wash

Trim Finish
- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish
- MW = Matte White (standard)
- SC = Silver Chrome

Housing (Optional)[4]
Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing


Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RD2T drivers only)

Whitegoods reserves the right to change any information without prior notice.

Notes
1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details.

technical information

3" ProTools+ Wall Wash
Round Recessed (Warm Dim)

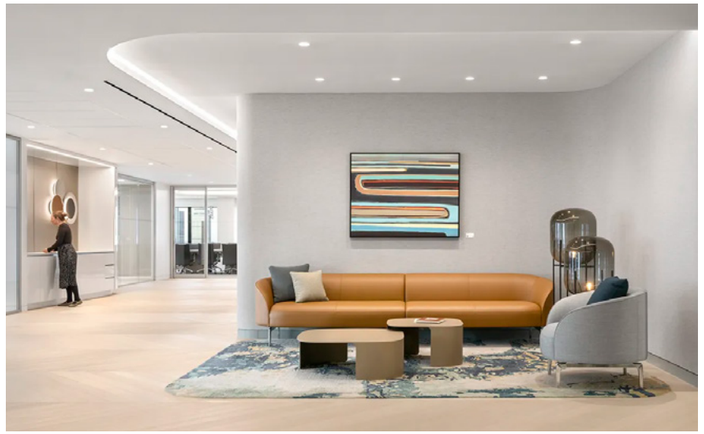

3" round aperture recessed wall washer, high output, Warm Dim, with wall wash cover and spread lens.


Luminaire	Part of a complete family of 3" aperture high output downlights 3" round aperture recessed wall washer Luminaire installed and maintained from below the ceiling Maximum ceiling thickness 1"
Fixation	RPT = Recessed Plaster Trim RBT = Recessed Bezel Trim
Cover	RWW = Round Wall Wash
Lens	WWL = Wall Wash Spread Lens
LED	Bridgelux LEDs CRI 92+ standard Low / Mid / High output Warm Dim (2700K - 1800K or 3000K - 1800K) L70 (TM21 Projected 85°C) Warm Dim = 50,000 hours
Beam	WW = Wall Wash
Driver	Integral and remote 0-10V, Phase and DALI-2 drivers
Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling* CP - Chicago Plenum **Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.*
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp locations



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

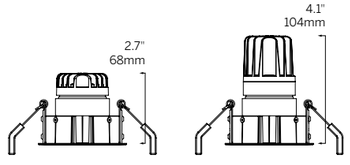

Low / Mid Power High Power

CUTOUT
Ø3.1"/ 80mm

3" ProTools+ Wall Wash
Round Recessed (Warm Dim)

Model	Fixation	Power[1]	CRI	CCT[2]	Driver[3]	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing[4]	Options
WG-80RPTWW	RPT RBT	L M H	92	WD2718 WD3018	S010 D010 SPH D2S RS010 RD010 RD2S X	RWW	WWL	WW	W B S	MW SC	LP NC IC CP X	EM AWNRF

Model
- WG-80RPTWW = 3" ProTools+ Wall Wash Round Recessed (Warm Dim)

Fixation
- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power[1]
- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

CRI
- 92 = 92 CRI

CCT[2]
- WD2718 = Warm Dim 2700K - 1800K
- WD3018 = Warm Dim 3000K - 1800K

Integral Driver[3]
- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W) (N/A for M power)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver[3]
- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

Cover
- RWW = Round Wall Wash

Lens
- WWL = Wall Wash Spread Lens

Beam
- WW = Wall Wash

Trim Finish
- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish
- MW = Matte White (standard)
- SC = Silver Chrome

Housing (Optional)[4]

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

Whitegoods reserves the right to change any information without prior notice.

Notes
1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details.

technical information