3" ProTools+ Wallwash
Round Recessed (Static White)


inter•lux




Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

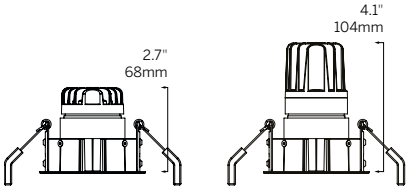

Low / Mid Power High Power



High Plus / Super High Power

Ordering Information												
WG-80RPTWW			92			RWW	WWL	WW				
Model	**Fixation**	**Power**[1]	**CRI**	**CCT**[2]	**Driver**[3]	**Cover**	**Lens**	**Beam**	**Trim Finish**	**Cover Finish**	**Housing**[4]	**Options**
WG-80RPTWW	RPT RBT	L M H HP SH	92	24 27 30 35 40	S010 D010 SPH D2S RS010 RD010 RD2S X	RWW	WWL	WW	W B S	MW SC	LP NC IC CP X	EM AWNRF

Luminaire
- Part of a complete family of 3" aperture high output downlights.
- 3" round aperture recessed wall washer.
- Efficacy up to 95 lumens per watt (delivered).
- CREE 2-step MacAdam LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85°C) Static White 60,000 hours.
- ETL and ETL-C for dry and damp locations.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available (see housings page). Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- 5-year warranty.

Fixation
- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power[1]
- L = Low Power, 6.3W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA
- HP = High Plus Power, 16.0W @ 450mA
- SH = Super High Power, 20.0W @ 550mA

CRI
- 92 = 92 CRI

CCT[2]
- 24 = 2400K
- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

Integral Driver[3]
- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W) (N/A for M or SH power)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver[3]
- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

Cover
- RWW = Round Wall Wash

Lens
- WWL = Wall Wash Spread Lens

Beam
- WW = Wall Wash

Trim Finish
- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish
- MW = Matte White (standard)
- SC = Silver Chrome

Housing (Optional)[4]

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)


1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details.

CUTOUT
Ø3.1" / 80mm

3" ProTools+ Wallwash
Round Recessed (Static White)


inter•lux

Recessed Plaster Trim (RPT)

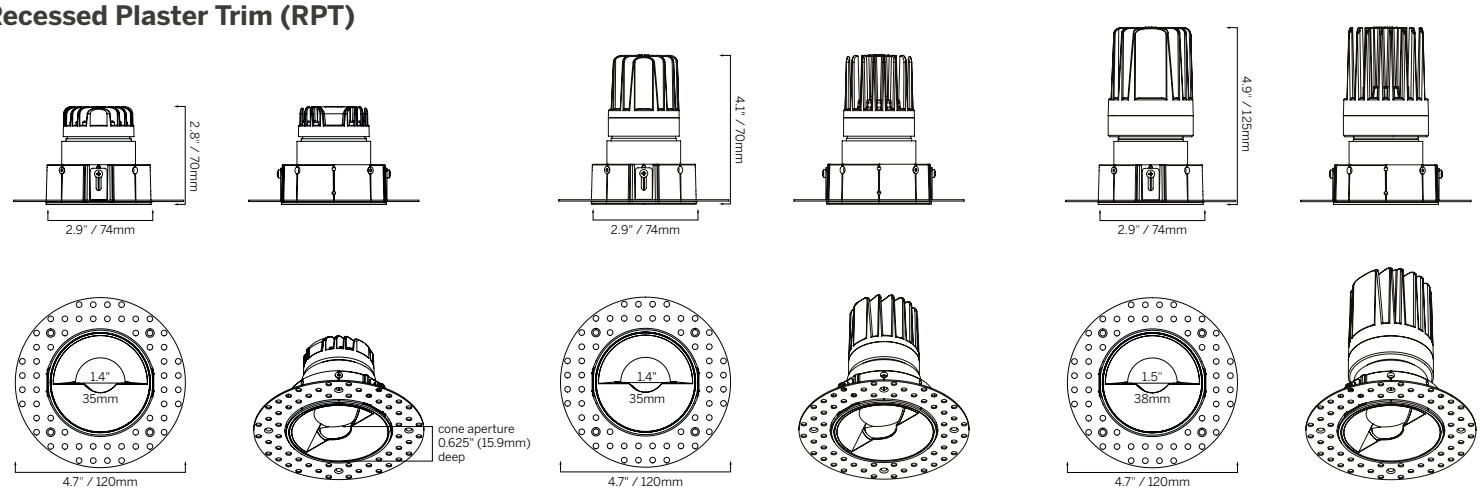

Low /Mid Power | High Power | High Plus / Super High Power

Recessed Bezel Trim (RBT)

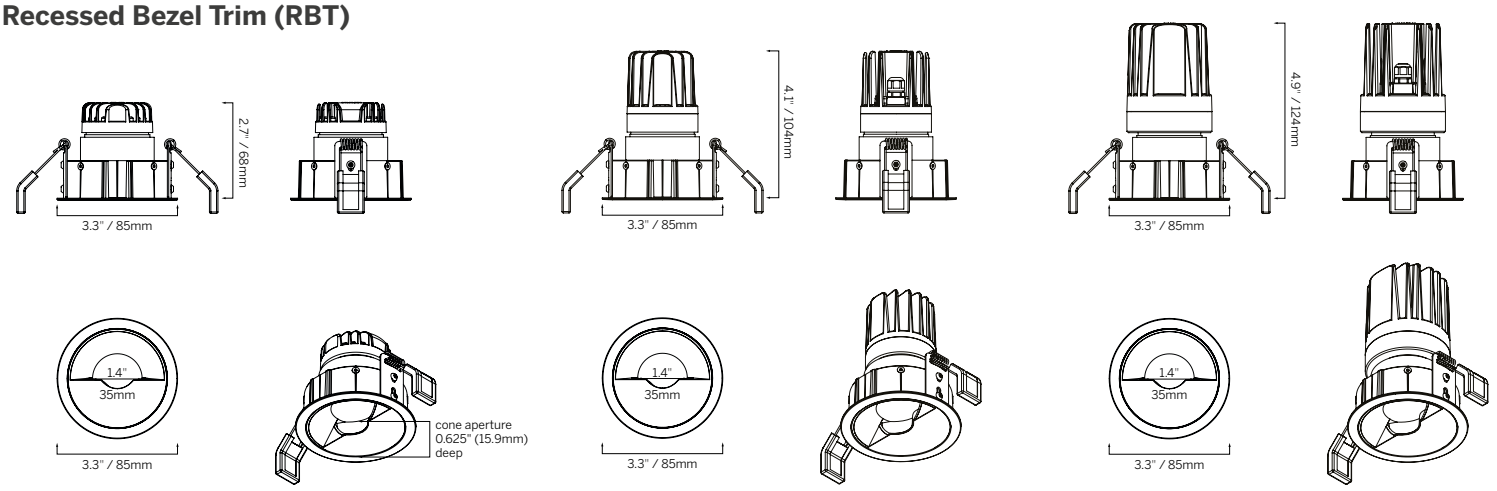

Low /Mid Power | High Power | High Plus / Super High Power