3" ProTools+ Wallwash
Round Recessed (Tunable White)


inter•lux




Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)



Low / Mid Power



High Power

Ordering Information												
WG-80RPTWW			92			RWW	WWL	WW				
Model	**Fixation**	**Power[1]**	**CRI**	**CCT[2]**	**Driver[3]**	**Cover**	**Lens**	**Beam**	**Trim Finish**	**Cover Finish**	**Housing[4]**	**Options**
WG-80RPTWW	RPT RBT	L M H	92	TW1840 TW2765	RD2T X	RWW	WWL	WW	W B S	MW SC	LP NC IC CP X	EM AWNRF

Luminaire
- Part of a complete family of 3" aperture high output downlights.
- 3" round aperture recessed wall washer.
- Bridgelux LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85ºC) Tunable White 50,000 hours.
- ETL and ETL-C for dry and damp locations.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available (see housings page). Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- 5-year warranty.

Fixation
- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power[1]
- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

CRI
- 92 = 92 CRI

CCT[2]
- TW1840 = Tunable White 1800K - 4000K
- TW2765 = Tunable White 2700K - 6500K

Remote Driver[3]
- RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W)
- X = No driver

Cover
- RWW = Round Wall Wash

Lens
- WWL = Wall Wash Spread Lens

Beam
- WW = Wall Wash

Trim Finish
- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish
- MW = Matte White (standard)
- SC = Silver Chrome

Housing (Optional)[4]

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RD2T drivers only)


1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details.

CUTOUT
Ø3.1" / 80mm


3" ProTools+ Wallwash
Round Recessed (Tunable White)

inter•lux

Recessed Plaster Trim (RPT)

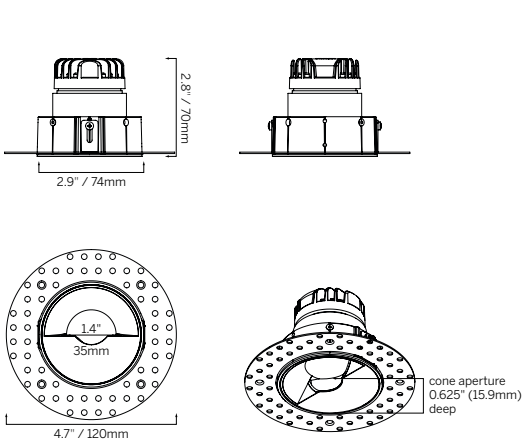


Low /Mid Power

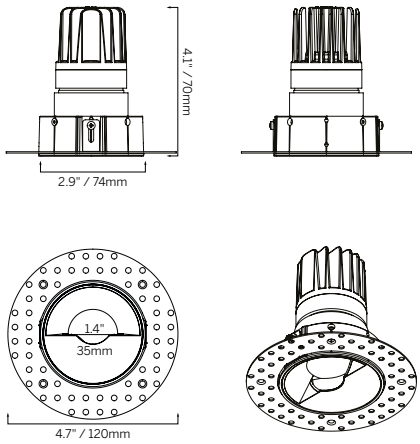


High Power

Recessed Bezel Trim (RBT)

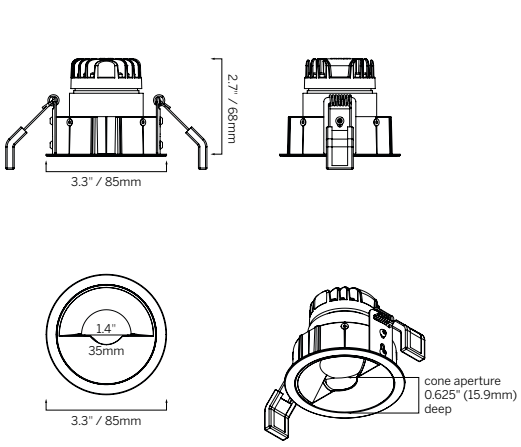

Low /Mid Power

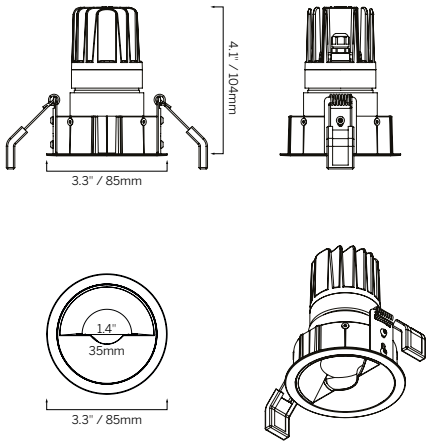

High Power

410 381 1497 inter-lux.com answers@inter-lux.com

Inter-lux reserves the right to make technical changes without notice.