3" ProTools+ Wallwash
Round Recessed (Warm Dim)


inter•lux




Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)



Low / Mid Power



High Power

Ordering Information												
WG-80RPTWW			92			RWW	WWL	WW				
Model	**Fixation**	**Power[1]**	**CRI**	**CCT[2]**	**Driver[3]**	**Cover**	**Lens**	**Beam**	**Trim Finish**	**Cover Finish**	**Housing[4]**	**Options**
WG-80RPTWW	RPT RBT	L M H	92	WD2718 WD3018	S010 D010 SPH D2S RS010 RD010 RD2S X	RWW	WWL	WW	W B S	MW SC	LP NC IC CP X	EM AWNRF

Luminaire
- Part of a complete family of 3" aperture high output downlights.
- 3" round aperture recessed wall washer.
- Bridgelux LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85ºC) Warm Dim 50,000 hours.
- ETL and ETL-C for dry and damp locations.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available (see housings page). Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- 5-year warranty.

Fixation
- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power[1]
- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

CRI
- 92 = 92 CRI

CCT[2]
- WD2718 = Warm Dim 2700K - 1800K
- WD3018 = Warm Dim 3000K - 1800K

Integral Driver[3]
- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W) (N/A for M power)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver[3]
- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No driver

Cover
- RWW = Round Wall Wash

Lens
- WWL = Wall Wash Spread Lens

Beam
- WW = Wall Wash

Trim Finish
- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

Cover Finish
- MW = Matte White (standard)
- SC = Silver Chrome

Housing (Optional)[4]

Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.
- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)


1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details. Low and Mid Power are inherently protected for use in insulated ceilings without requiring a recessed housing.

CUTOUT
Ø3.1" / 80mm


3" ProTools+ Wallwash
Round Recessed (Warm Dim)

inter•lux

Recessed Plaster Trim (RPT)

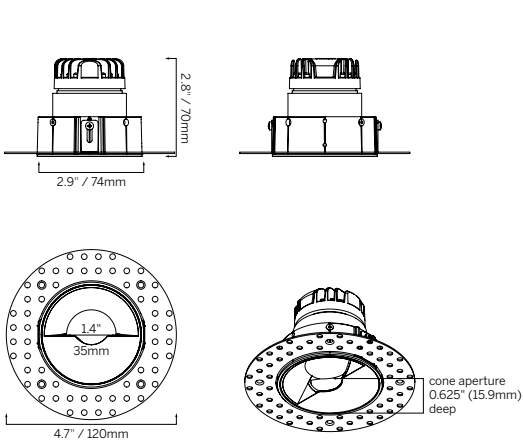


Low /Mid Power

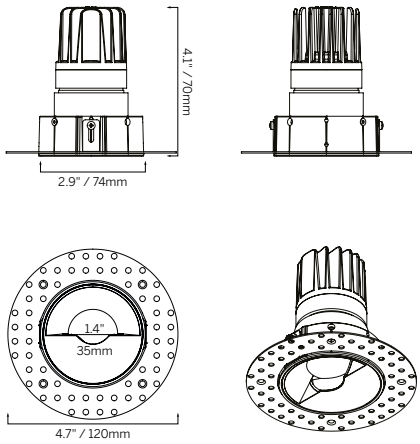


High Power

Recessed Bezel Trim (RBT)

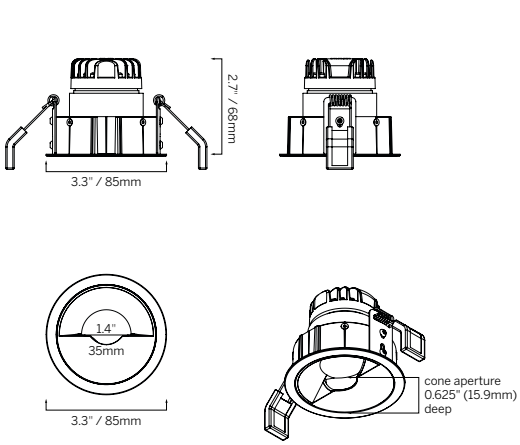

Low /Mid Power

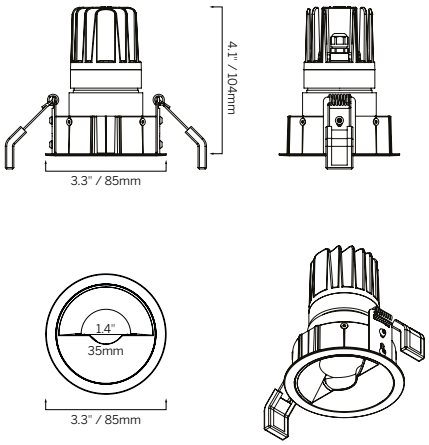

High Power