

# 3" ProTools+ Adjustable Round Recessed (Tunable White)


inter•lux



Recessed wPlaster Trim (RPT)



Recessed Bezel Trim (RBT)

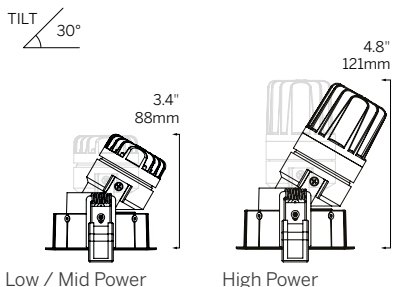

Low / Mid Power

High Power

| Ordering Information |            |                    |     |                  |                     |       |                        |                          |             |                      |                           |             |
|----------------------|------------|--------------------|-----|------------------|---------------------|-------|------------------------|--------------------------|-------------|----------------------|---------------------------|-------------|
| WG-80RPTA            |            |                    | 92  |                  |                     | RAC   |                        |                          |             |                      |                           |             |
| Model                | Fixation   | Power <sup>1</sup> | CRI | CCT <sup>2</sup> | Driver <sup>3</sup> | Cover | Lens                   | Beam                     | Trim Finish | Cover Finish         | Housing <sup>4</sup>      | Options     |
| WG-80RPTA            | RPT<br>RBT | L<br>M<br>H        | 92  | TW1840<br>TW2765 | RD2T<br>X           | RAC   | OA<br>SOL<br>LSL<br>HL | 20°<br>25°<br>40°<br>50° | W<br>B<br>S | MW<br>MB<br>SC<br>BC | LP<br>NC<br>IC<br>CP<br>X | EM<br>AWNRF |

## Luminaire

- Part of a complete family of 3" aperture high output downlights.
- 3" round aperture recessed adjustable downlight.
- Efficacy up to XX lumens per watt (delivered).
- Bridgelux LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85°C) Tunable White 50,000 hours.
- ETL and ETL-C for dry and damp locations.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available (see housings page)

## Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

## Power<sup>1</sup>

- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

## CRI

- 92 = 92 CRI

## CCT<sup>2</sup>

- TW1840 = Tunable White 1800K - 4000K
- TW2765 = Tunable White 2700K - 6500K

## Remote Driver<sup>3</sup>

- RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W)
- X = No driver

## Cover

- RAC = Round Asymmetric Cone

## Lens (1 accessory/lens per fixture)

- OA = Open Aperture
- SOL = Solite Lens
- LSL = Linear Spread Lens
- HL = Honeycomb Louver

## Beam

- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 40 = 40° Beam Angle
- 50 = 50° Beam Angle

## Trim Finish

- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

## Cover Finish

- MW = Matte White (standard)
- MB = Matte Black
- SC = Silver Chrome
- BC = Black Chrome

## Housing (Optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

## Options


- EM = Emergency (remote only)
- AAWNRF = Lutron Athena Wireless Node RF (RD2T drivers only)

1. Wattage shown does not include power supplies/drivers.

2. See photometric data sheet for delivered lumens.

3. See driver information for details.

4. See housings pages for details.











# 3" ProTools+ Adjustable Round Recessed (Tunable White)

inter•lux

## Recessed Plaster Trim (RPT)

TILT 30°











Low /Mid Power

High Power

## Recessed Bezel Trim (RBT)

TILT 30°



Low /Mid Power

High Power