

# 3" ProTools+ Wallwash

## Square Recessed (Tunable White)


inter•lux



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

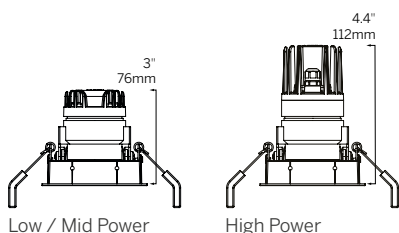

Low / Mid Power

High Power

### Ordering Information

| WG-80SPTWW |            |                    | 92  |                  |                     | SWW   | WWL  | WW   |             |              |                           |             |
|------------|------------|--------------------|-----|------------------|---------------------|-------|------|------|-------------|--------------|---------------------------|-------------|
| Model      | Fixation   | Power <sup>1</sup> | CRI | CCT <sup>2</sup> | Driver <sup>3</sup> | Cover | Lens | Beam | Trim Finish | Cover Finish | Housing <sup>4</sup>      | Options     |
| WG-80SPTWW | RPT<br>RBT | L<br>M<br>H        | 92  | TW1840<br>TW2765 | RD2T<br>X           | SWW   | WWL  | WW   | W<br>B<br>S | MW<br>SC     | LP<br>NC<br>IC<br>CP<br>X | EM<br>AWNRF |

### Luminaire

- Part of a complete family of 3" aperture high output downlights.
- 3" square aperture recessed wall washer.
- Efficacy up to XX lumens per watt (delivered).
- Bridgelux LEDs.
- CRI 92+ standard.
- L70 (TM21 Projected 85°C) Tunable White 50,000 hours.
- ETL and ETL-C for dry and damp locations.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available (see housings page).
- 5-year warranty.

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- L = Low Power, 6.0W @ 350mA
- M = Mid Power, 9.0W @ 250mA
- H = High Power, 12.0W @ 350mA

### CRI

- 92 = 92 CRI

### CCT<sup>2</sup>

- TW1840 = Tunable White 1800K - 4000K
- TW2765 = Tunable White 2700K - 6500K

### Remote Driver<sup>3</sup>

- RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W)
- X = No driver

### Cover

- SWW = Square Wall Wash

### Lens

- WWL = Wall Wash Spread Lens

### Beam

- WW = Wall Wash

### Trim Finish

- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006

### Cover Finish

- MW = Matte White (standard)
- SC = Silver Chrome

### Housing (Optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

### Options

- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RD2T drivers only)

1. Wattage shown does not include power supplies/drivers.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. See housings pages for details.

CUTOUT  
3.1x3.1" / 80x80mm

whitegoods

410 381 1497 inter-lux.com answers@inter-lux.com  
Inter-lux reserves the right to make technical changes without notice.











Updated 10.2026 1

# 3" ProTools+ Wallwash

## Square Recessed (Tunable White)

inter•lux









### Recessed Plaster Trim (RPT)



Low / Mid Power

High Power

### Recessed Bezel Trim (RBT)



Low / Mid Power

High Power