




ProTools 60 Linear Downlight Recessed



PLASTER TRIM

PATTERN CORNER (P)




WG-60PTL-RPT-P-RML

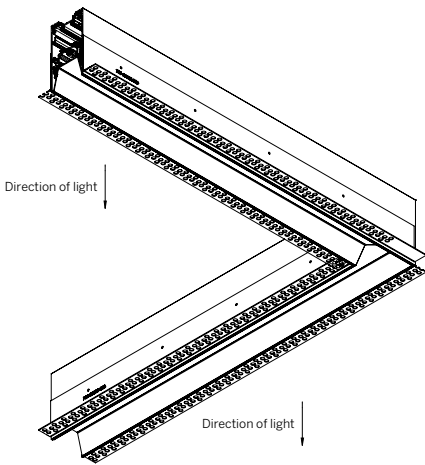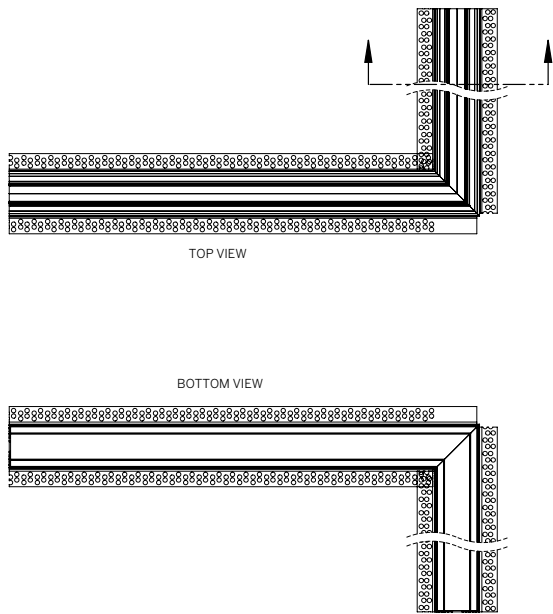

Minimum Angle 45°
Maximum Angle 180°

PATTERN CORNER (P)

WG-60PTL-RPT-P-ROL

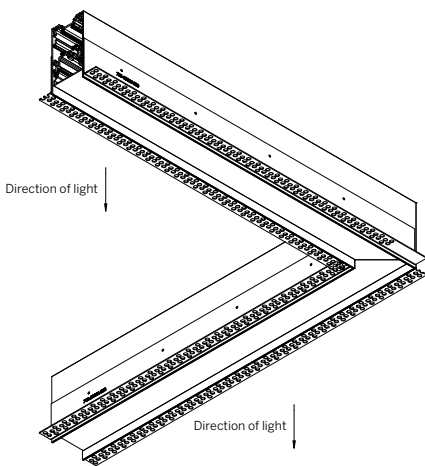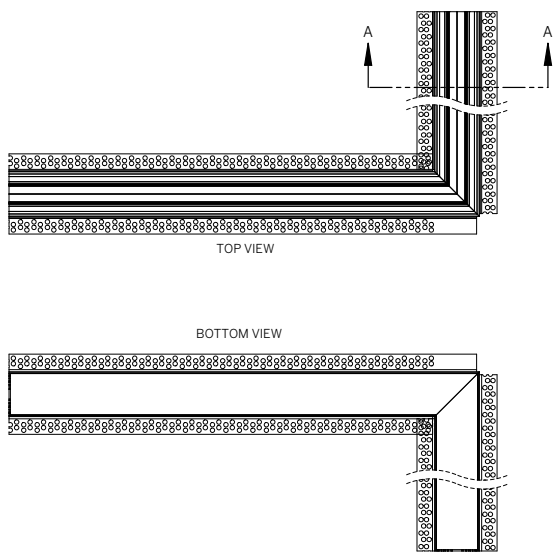

Minimum Angle 45°
Maximum Angle 180°


ProTools 60 Linear Downlight Recessed



PLASTER TRIM


PATTERN CORNER (P)

WG-60PTL-RPT-P-RLW/RLB

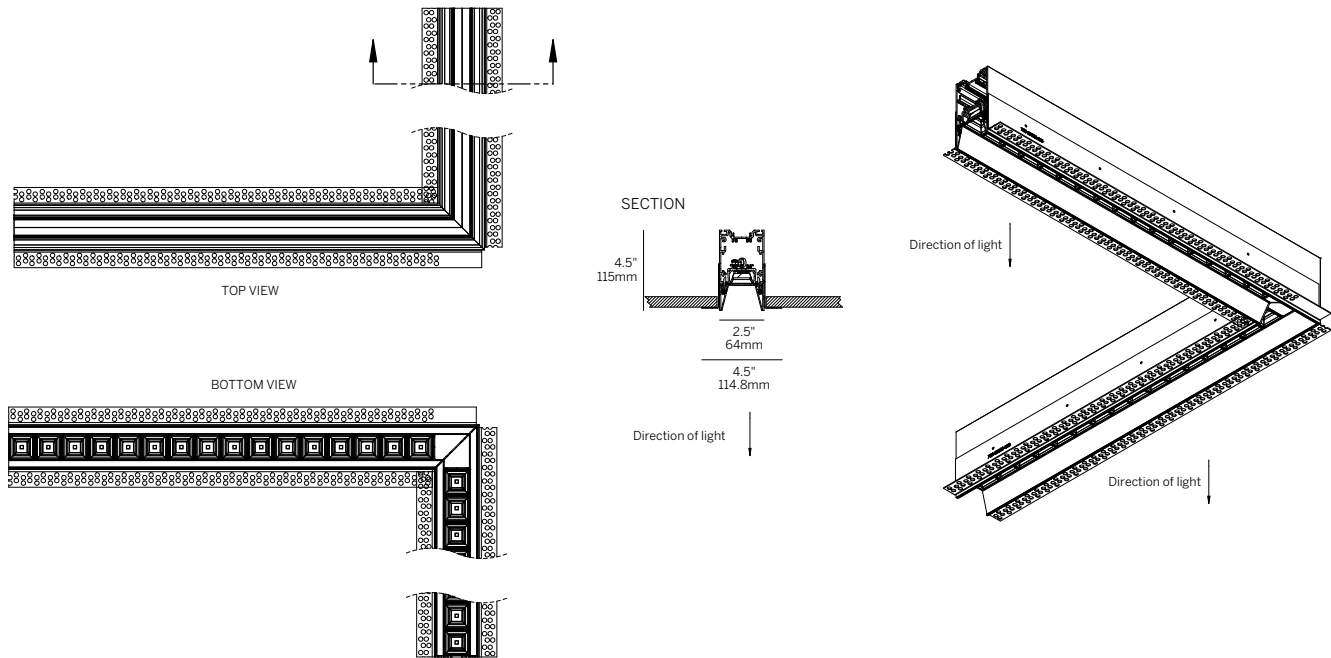

PATTERN CORNER (P)

WG-60PTL-RPT-P-RNO

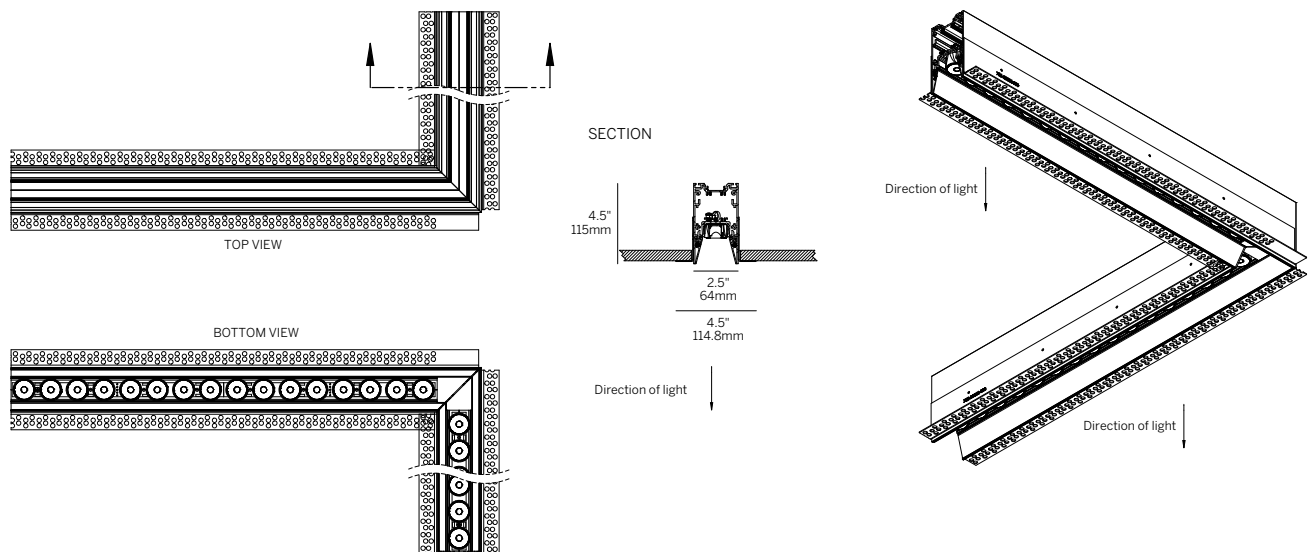


ProTools 60 Linear Downlight Recessed



BEZEL TRIM / GRID TRIM

PATTERN CORNER (P)


WG-60PTL-[RBT / RGT9 / RGT15]-P-RML

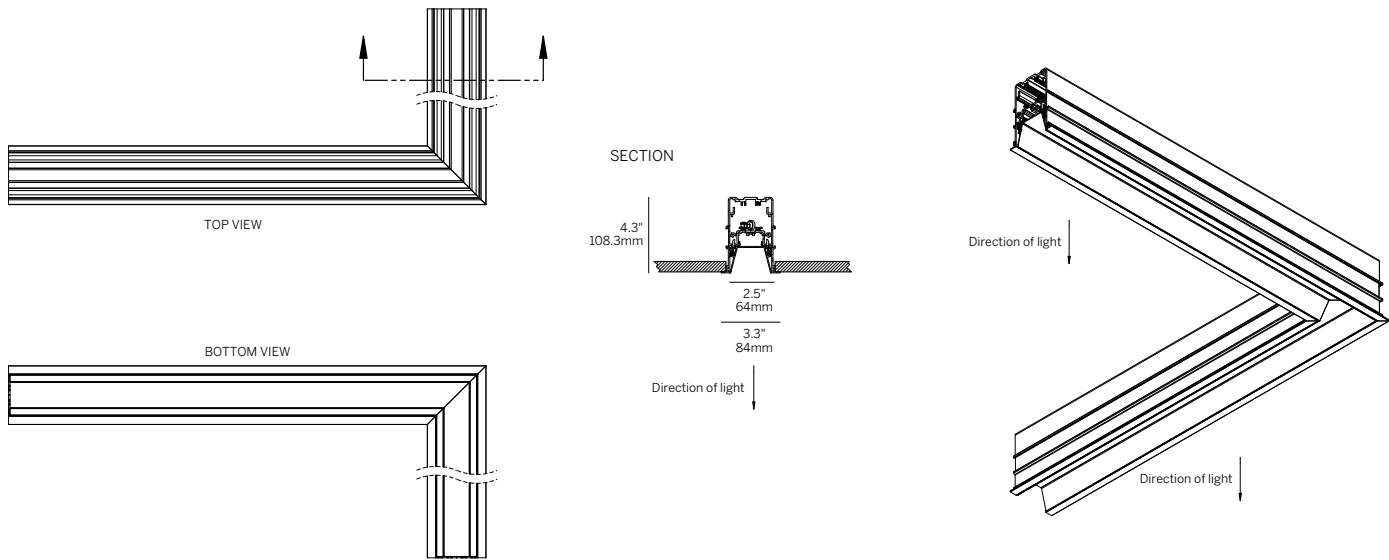

Minimum Angle 45°
Maximum Angle 180°

PATTERN CORNER (P)

WG-60PTL-[RBT / RGT9 / RGT15]-P-ROL

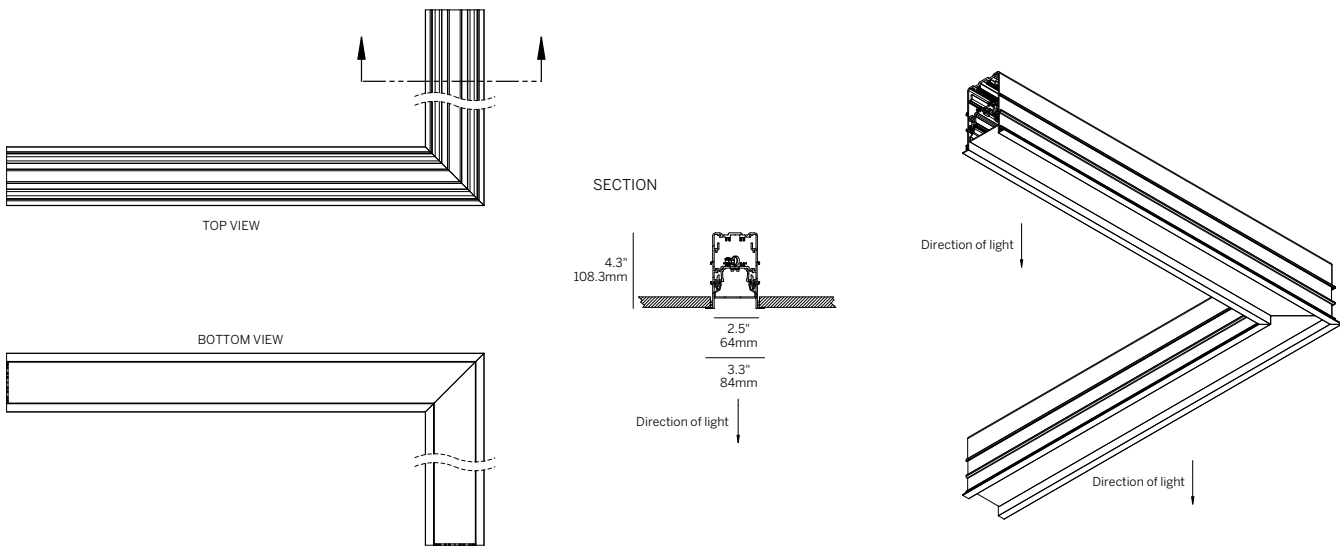

Minimum Angle 45°
Maximum Angle 180°


ProTools 60 Linear Downlight Recessed



BEZEL TRIM / GRID TRIM


PATTERN CORNER (P)

WG-60PTL-[RBT / RGT9 / RGT15]-P-RLW/RLB

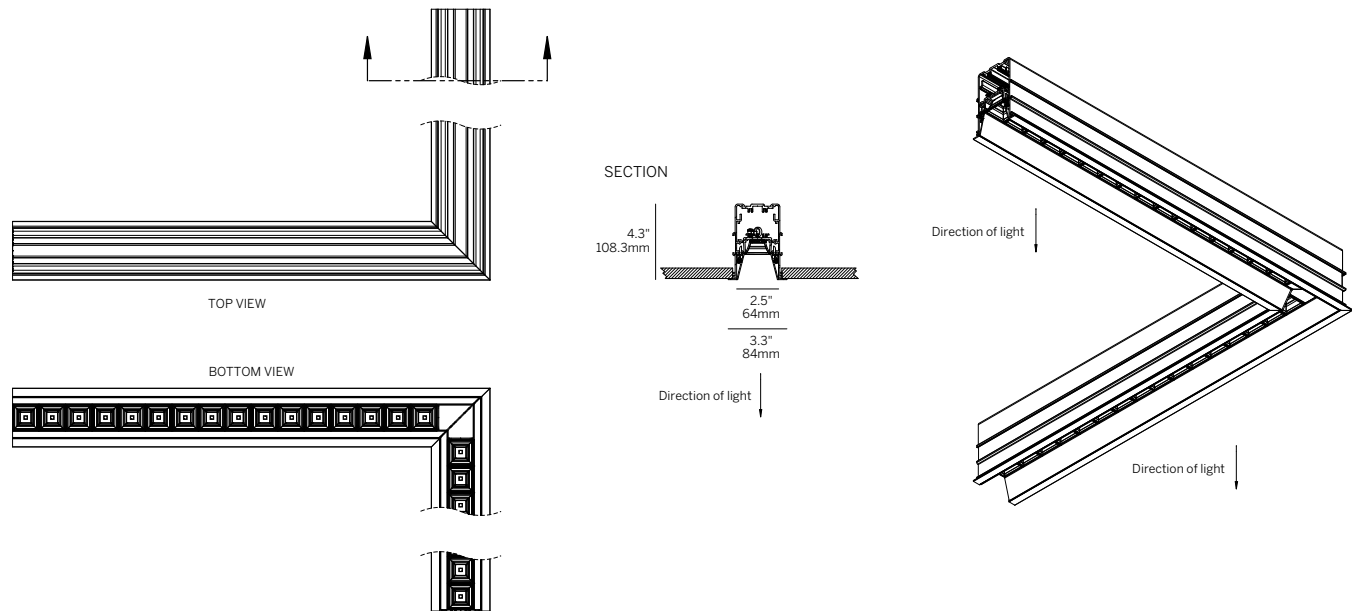

PATTERN CORNER (P)

WG-60PTL-[RBT / RGT9 / RGT15]-P-RNO

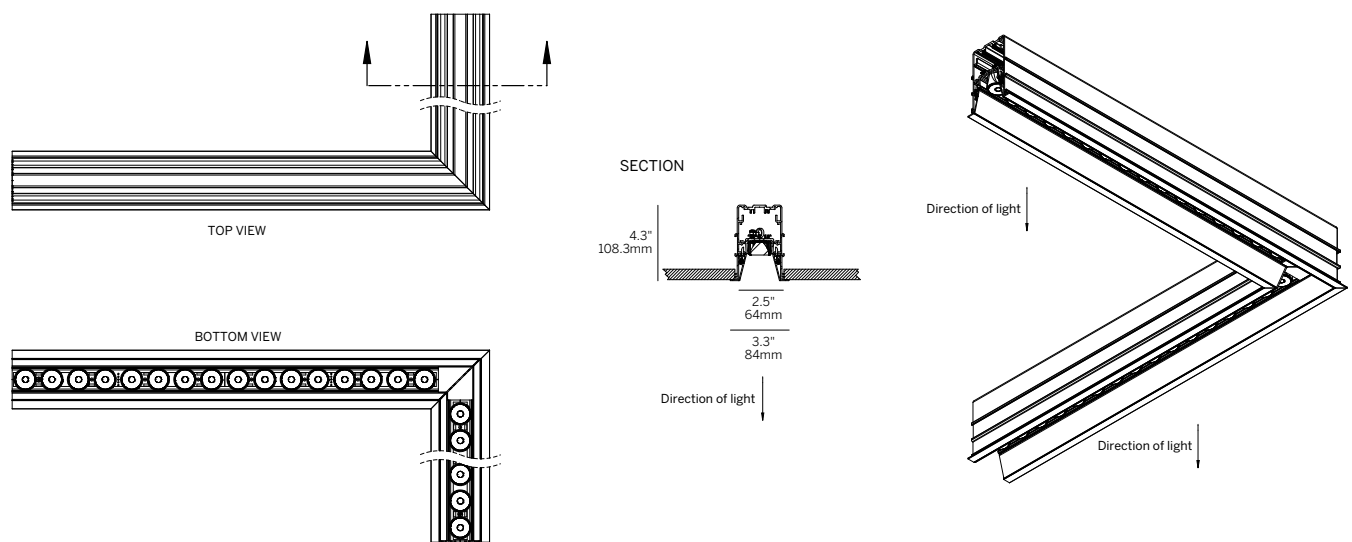


ProTools 60 Linear Downlight Recessed



GRID TRIM (SLOT)

PATTERN CORNER (P)


WG-60PTL-RGTS-P-RML

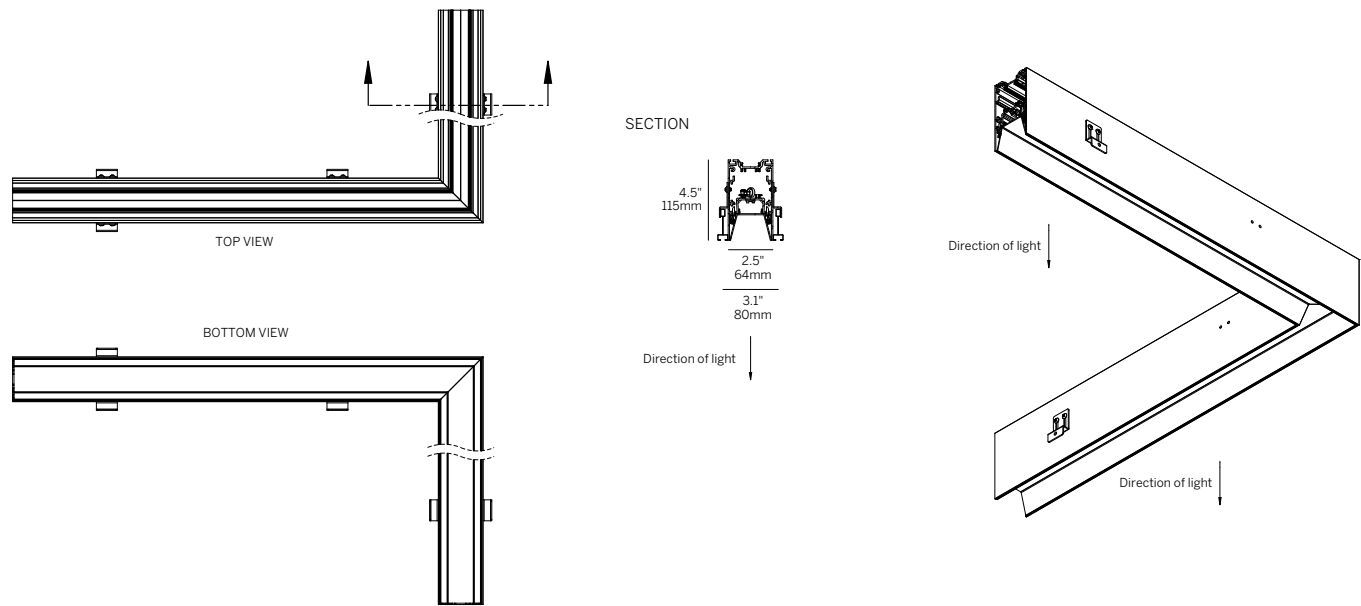

Minimum Angle 45°
Maximum Angle 180°

PATTERN CORNER (P)

WG-60PTL-RGTS-P-ROL

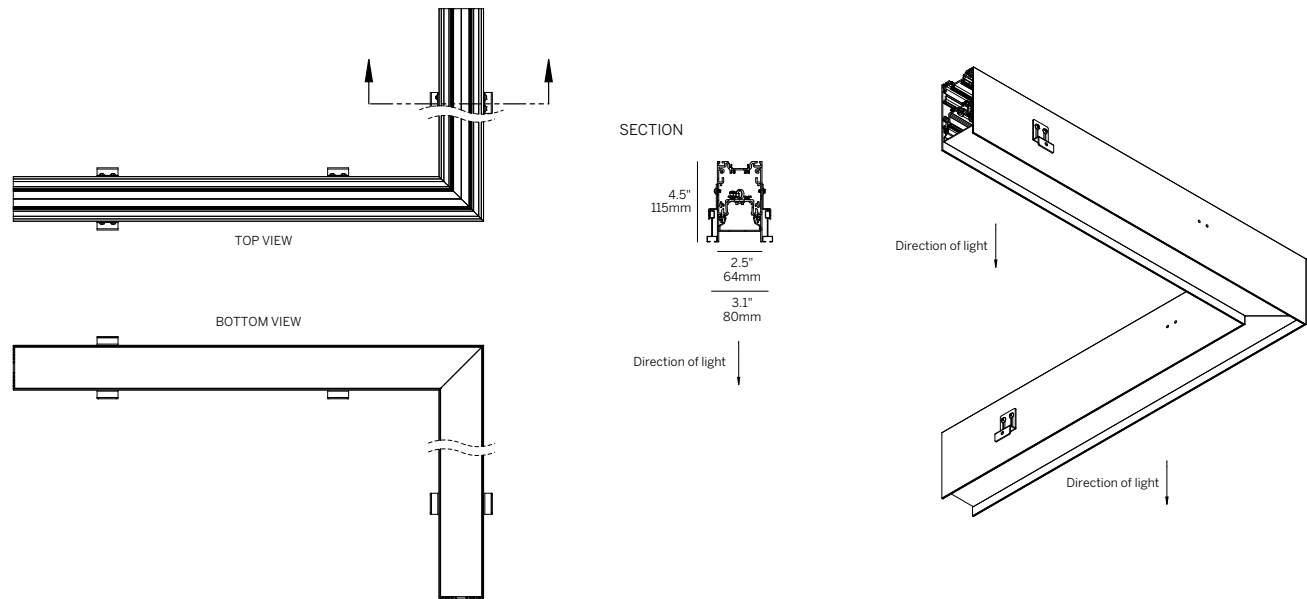

Minimum Angle 45°
Maximum Angle 180°


ProTools 60 Linear Downlight Recessed





GRID TRIM (SLOT)

PATTERN CORNER (P)

WG-60PTL-RGTS-P-RLW/RLB

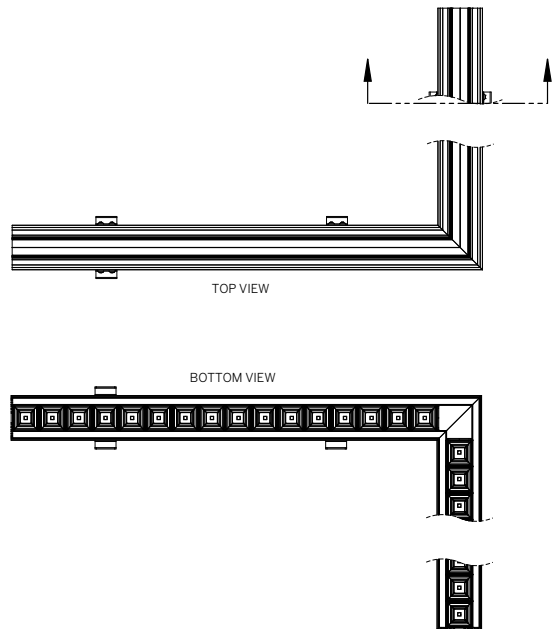


SECTION

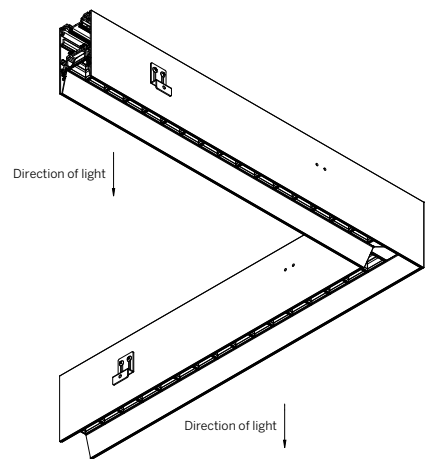



PATTERN CORNER (P)


WG-60PTL-RGTS-P-RNO

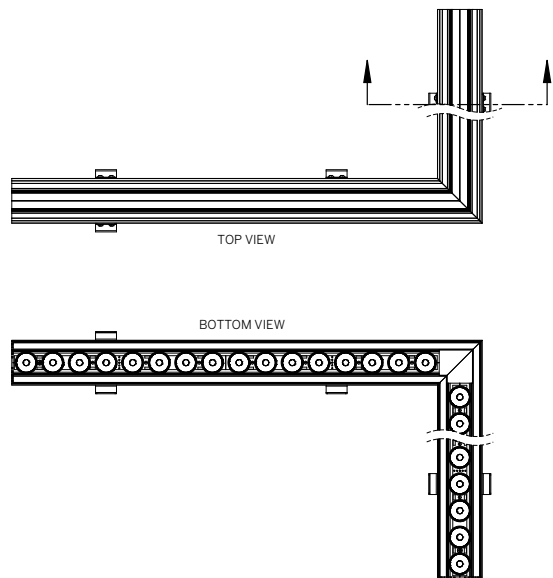


SECTION

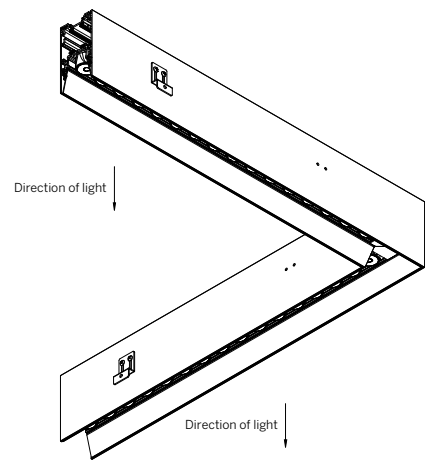

CORNER + STRAIGHT RUN CONNECTIONS


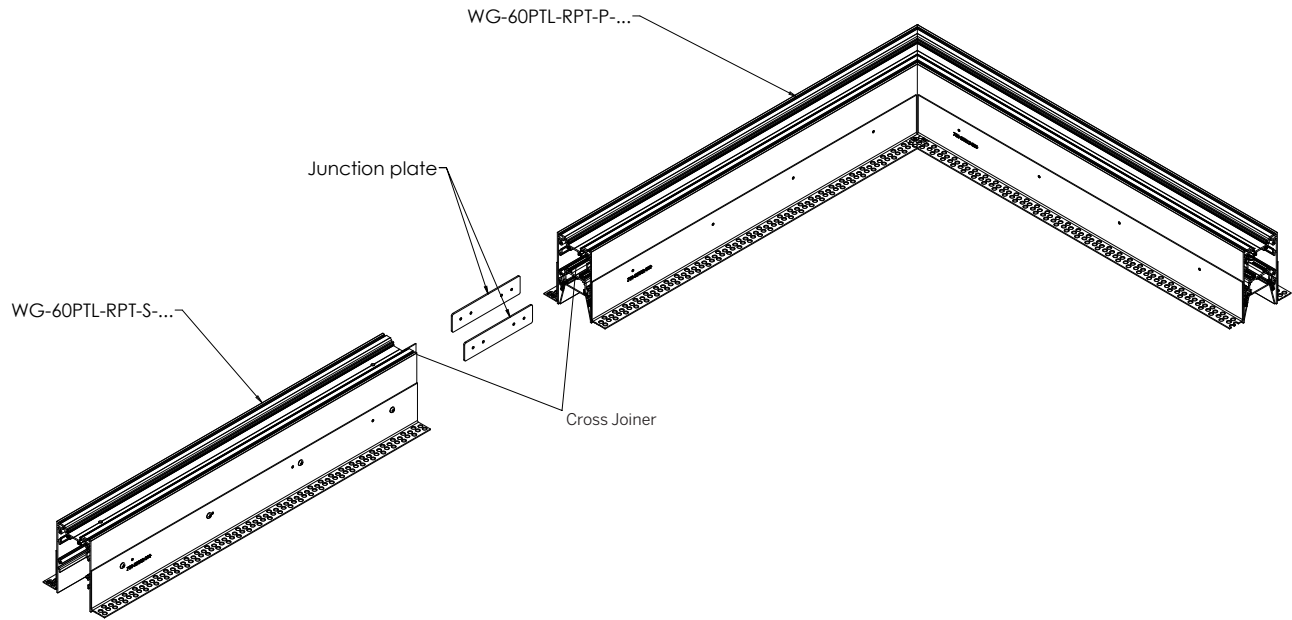


CROSS JOINER

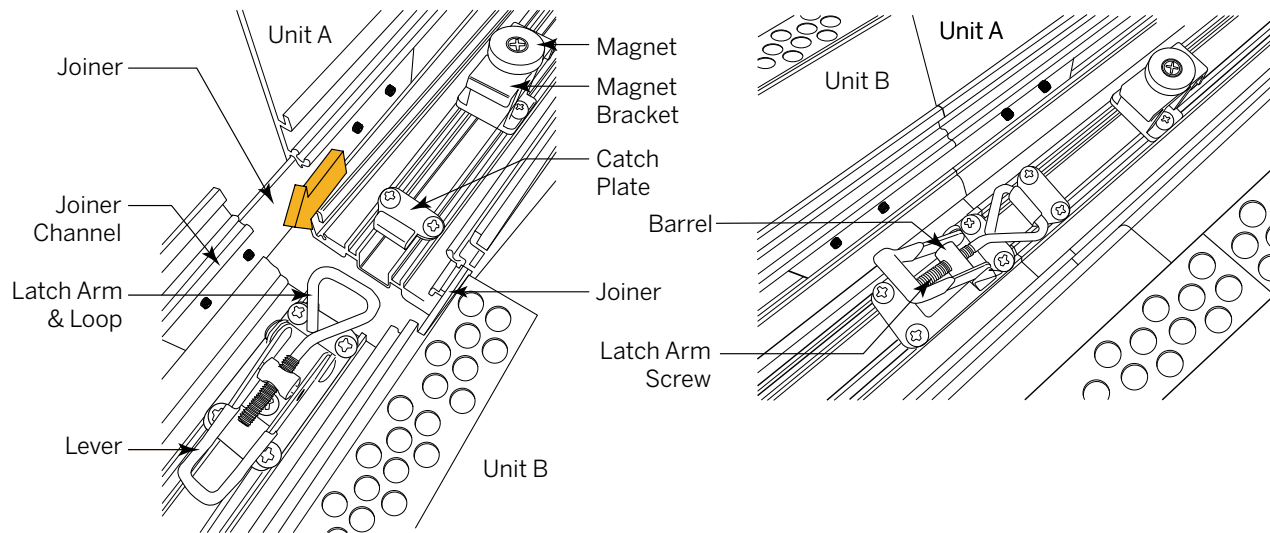


The Boot Latch Cross Joiner securely connects linear lighting at cross intersections, ensuring precise alignment, stability, and a clean, continuous appearance.


CHICAGO PLENUM

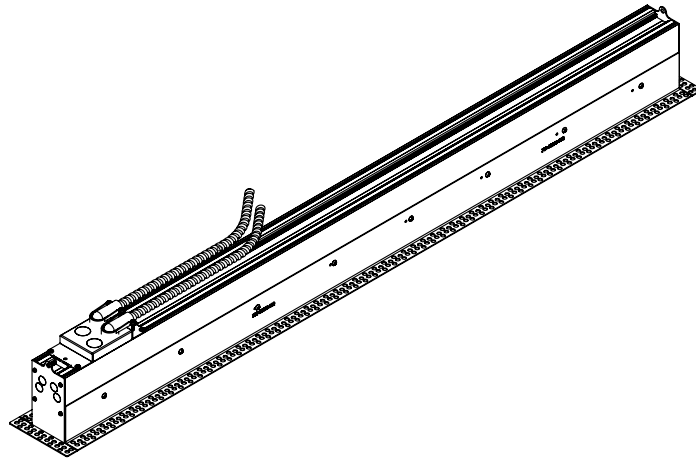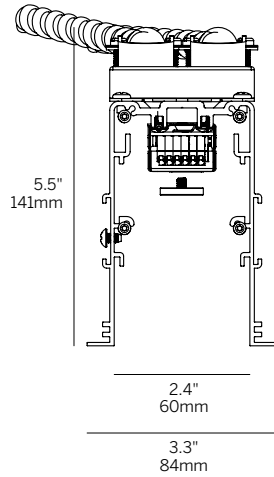


PROFILE DIMENSIONS

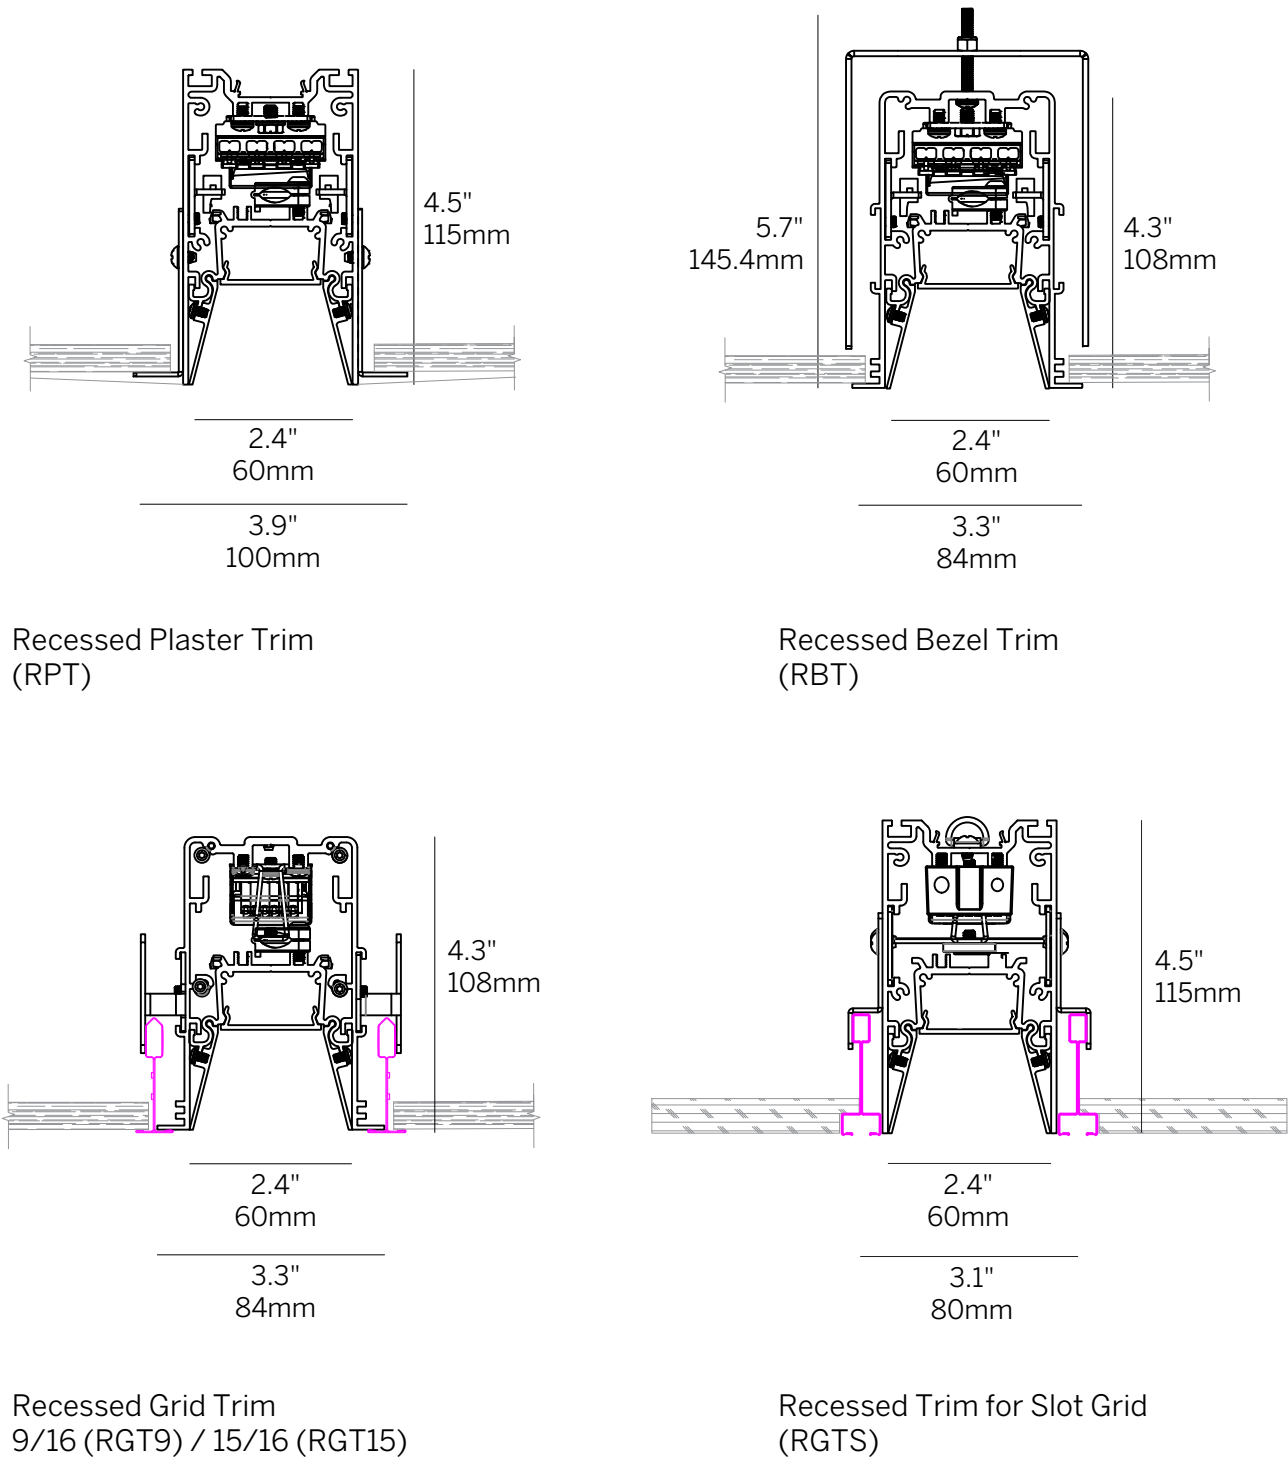


LENS / LOUVER DIMENSIONS

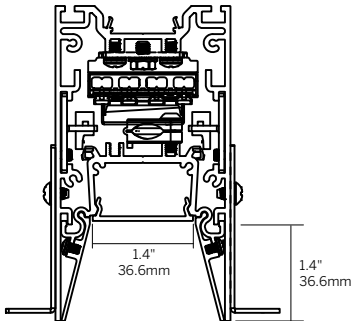


Recessed Micro-Prismatic Lens (RML)

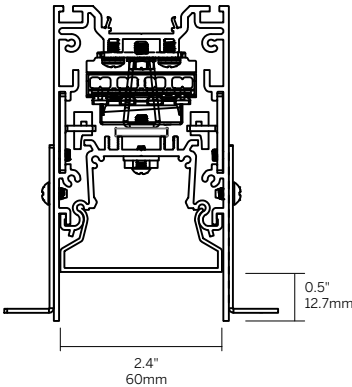

Regressed Opal Lens (ROL)

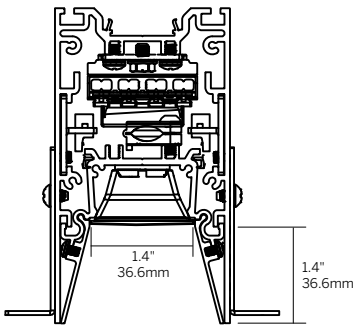


Recessed Louver Black (RLB)
Recessed Louver White (RLW)

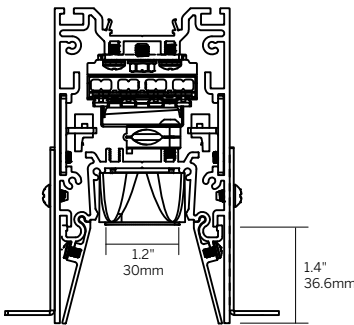

Recessed Narrow Optic (RNO)


FILLER PLATE STRAIGHT RUN / LOUVER

- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

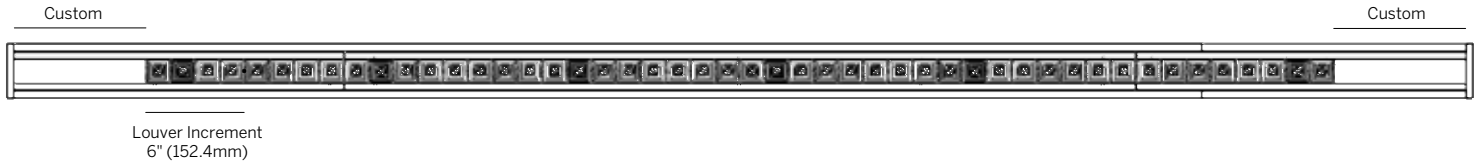

FILLER PLATE CORNER CONFIGURATION / LOUVER

- Corners will have a 2.5"x2.5" Corner Filler Plate, recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate has a maximum length of 3" and is recessed and finished to match the louver and minimize visual impact.

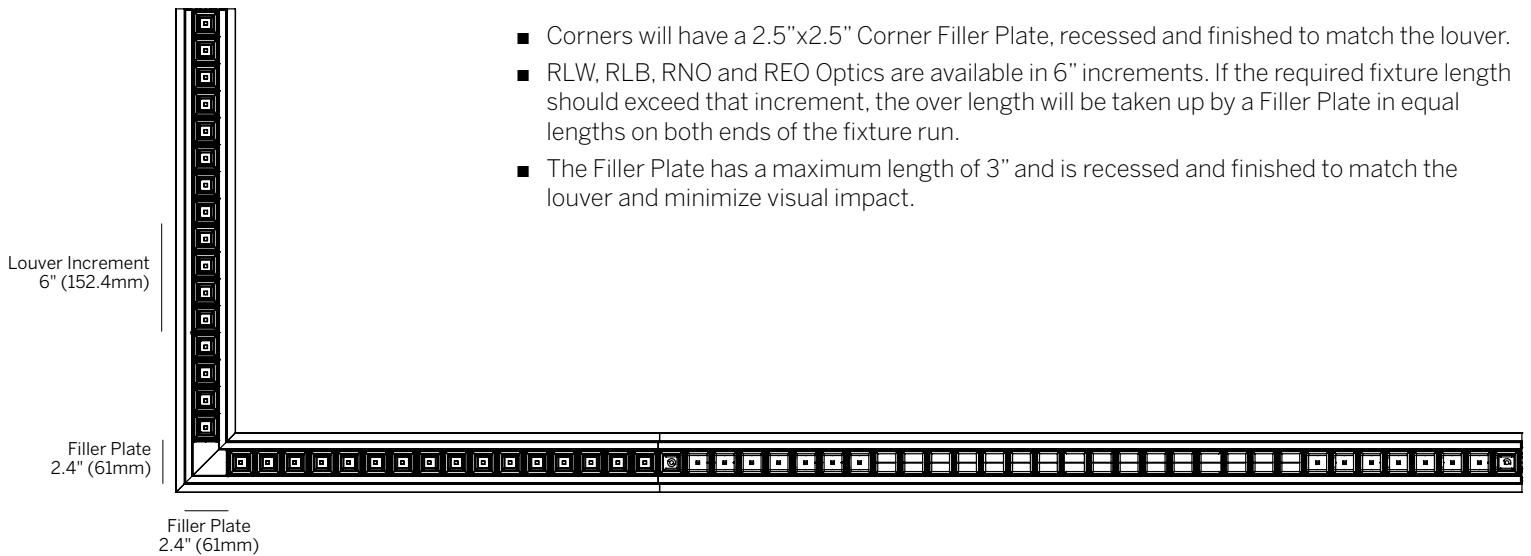

FILLER PLATE MULTI-CORNER / LOUVER

