


ProTools 60 Linear Direct/Indirect Suspended




PATTERN CORNER (P)


WG-60PTL-SXX-P-...-RML

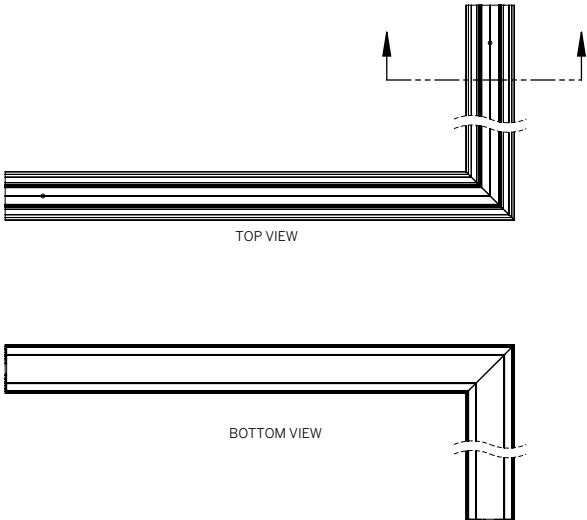

SECTION




Direction of light can be both up and/or down, it depends on the item

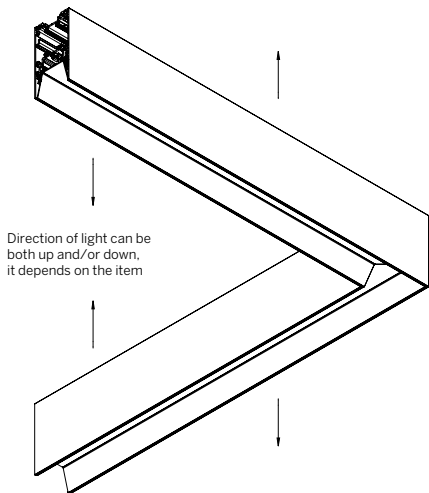


Minimum Angle 45°
Maximum Angle 180°

PATTERN CORNER (P)


WG-60PTL-SXX-P-...-ROL

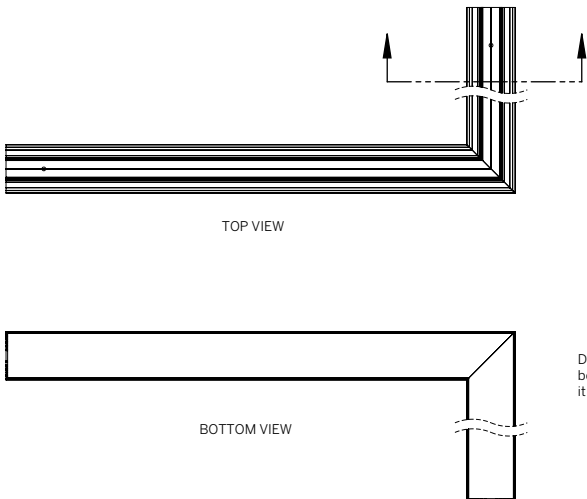

SECTION



Direction of light can be both up and/or down, it depends on the item

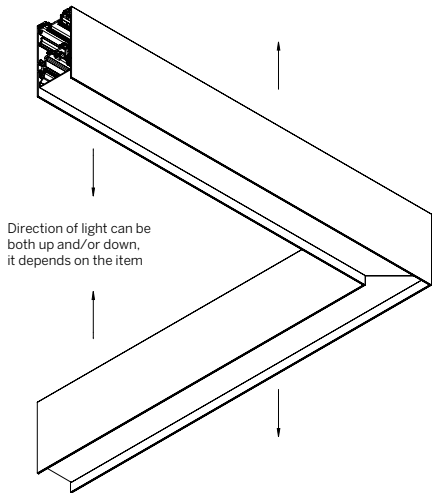


Minimum Angle 45°
Maximum Angle 180°


ProTools 60 Linear Direct / Indirect Suspended



PATTERN CORNER (P) WG-60PTL-SXX-P-...-RLW/RLB

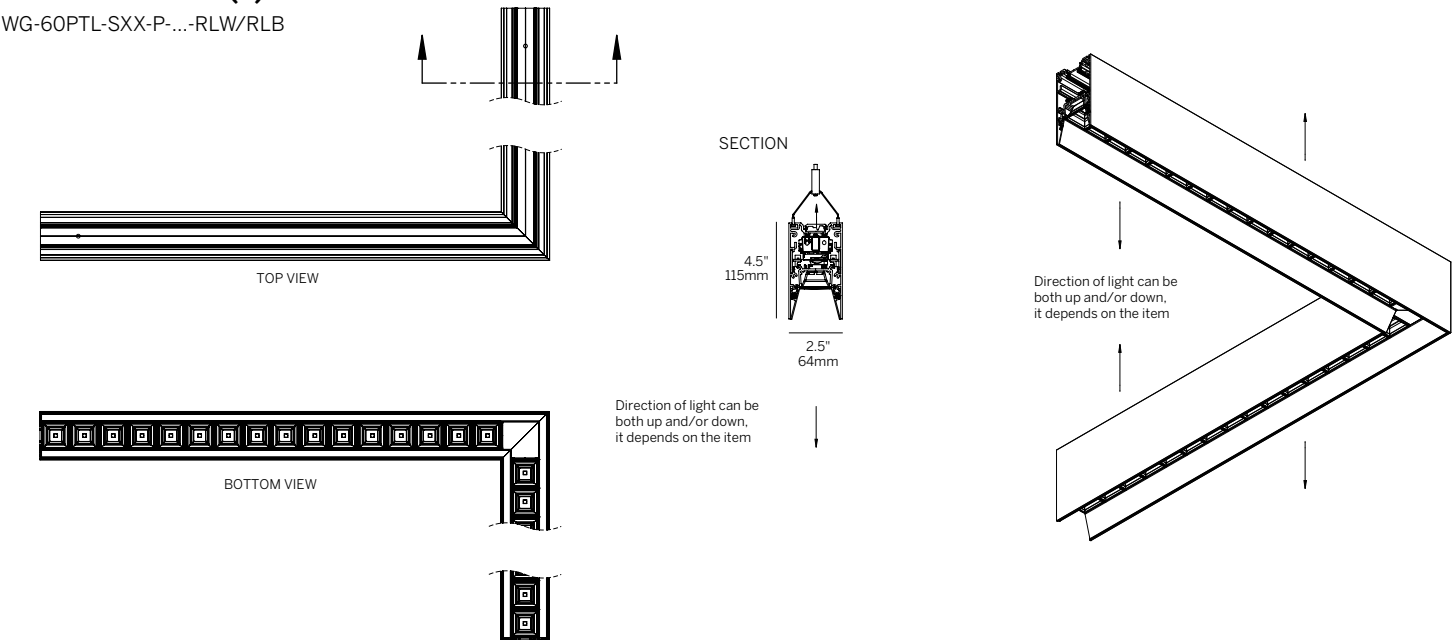

PATTERN CORNER (P) WG-60PTL-SXX-P-...-REO

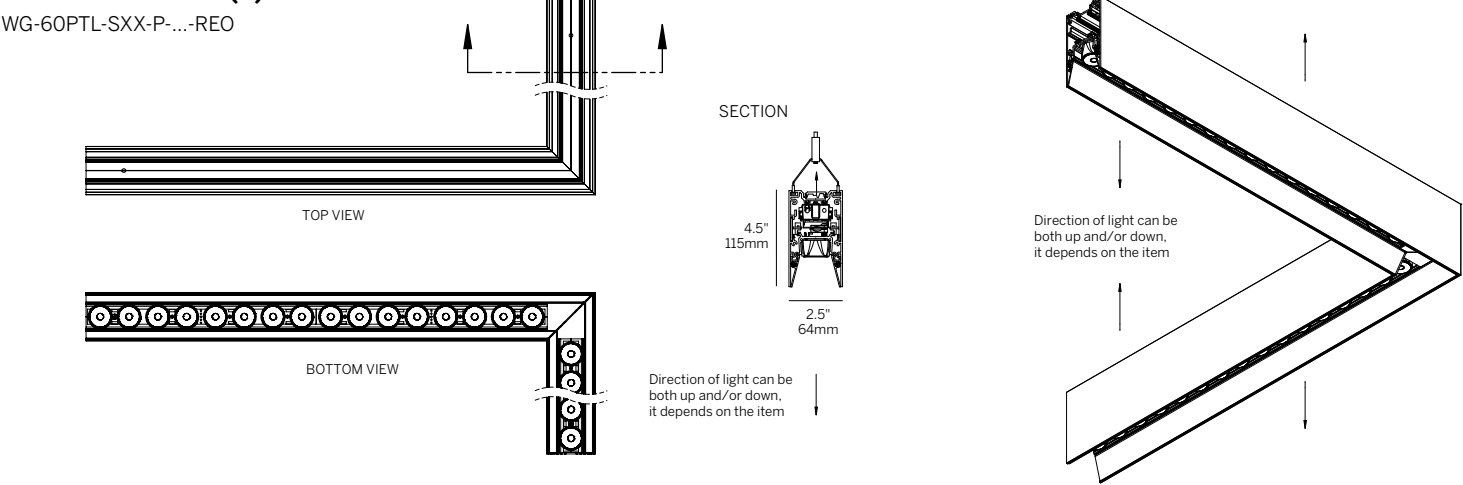


ProTools 60 Linear Direct / Indirect Suspended





INSIDE CORNER (PI)

WG-60PTLWW-SXX-PI-...-LML-WW-



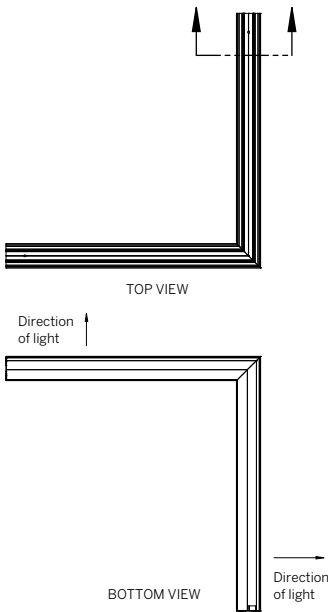


Minimum Angle 45°
Maximum Angle 180°



OUTSIDE CORNER (PO)


WG-60PTLWW-SXX-PO-...-LML-WW-

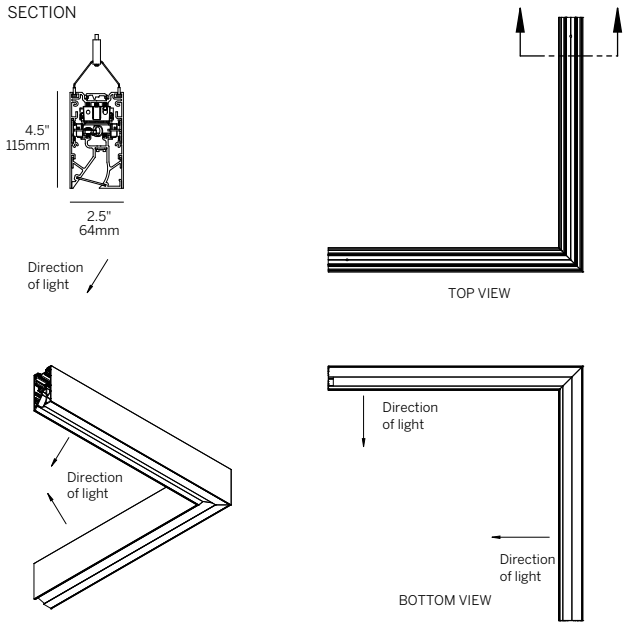


ProTools 60 Linear Direct / Indirect Suspended



CORNER + STRAIGHT RUN CONNECTIONS

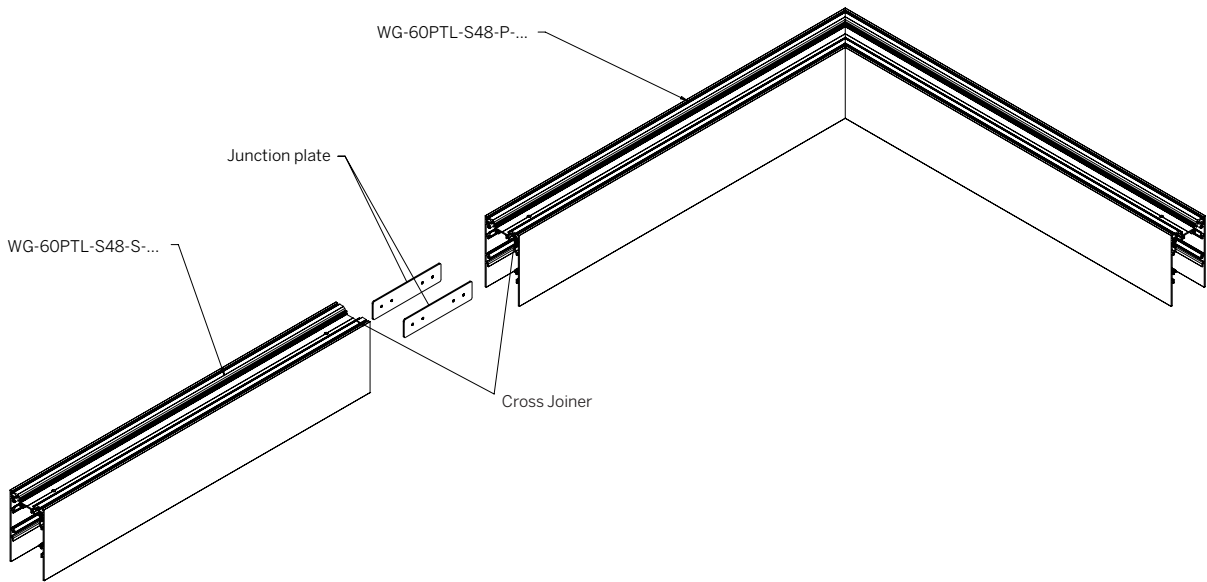

CROSS JOINER

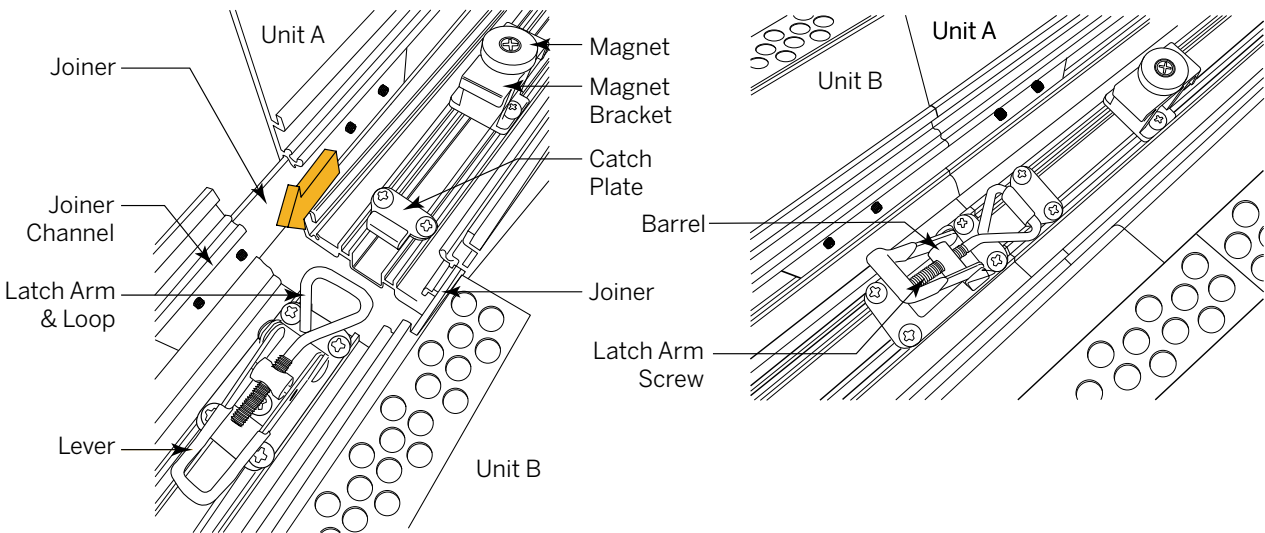


The Boot Latch Cross Joiner securely connects linear lighting at cross intersections, ensuring precise alignment, stability, and a clean, continuous appearance.

ProTools 60 Linear Direct / Indirect Suspended




MOUNTING / CANOPIES


Power + Suspension Canopy
Single Feed

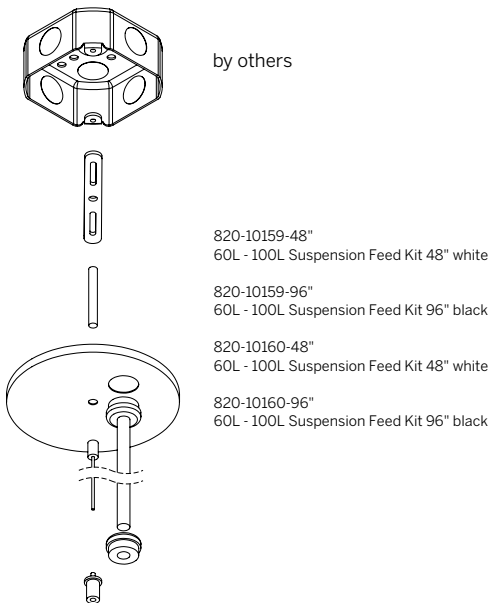



Power + Suspension Canopy
Dual Feed

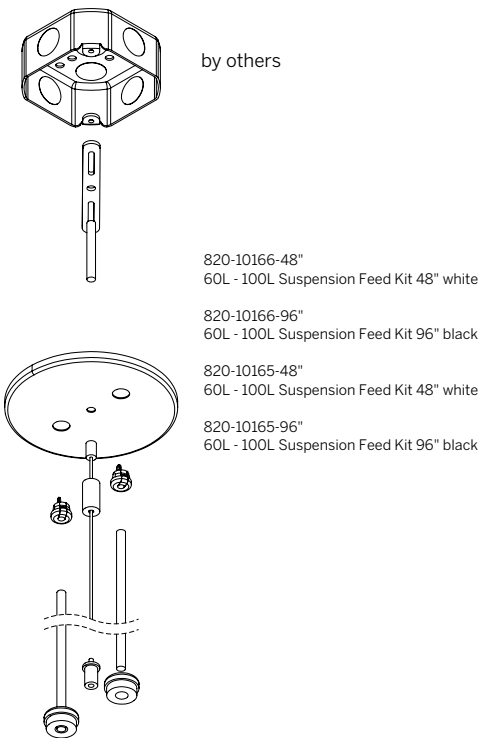

Suspension Canopy
Non Feed

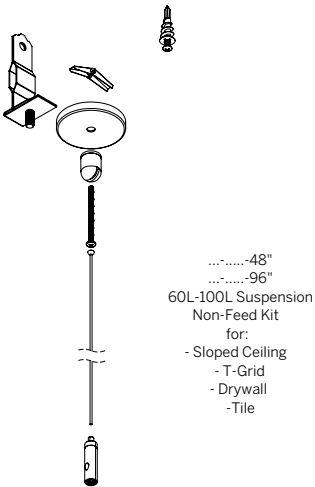


SUSPENSION / MOUNTING

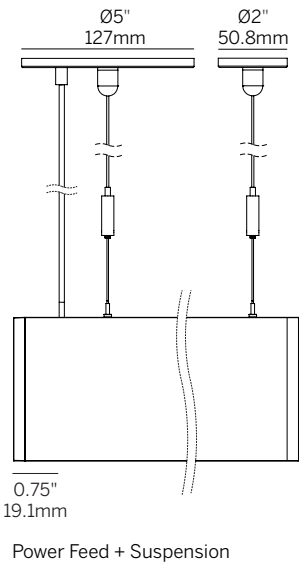


ProTools 60 Linear Direct / Indirect Suspended




PROFILE DIMENSIONS

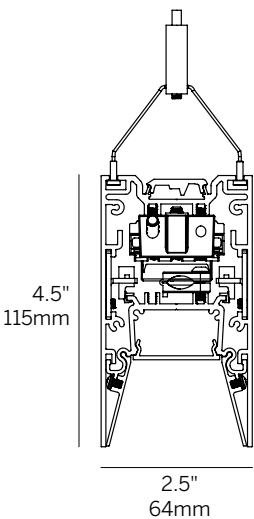


LENS / LOUVER DIMENSIONS

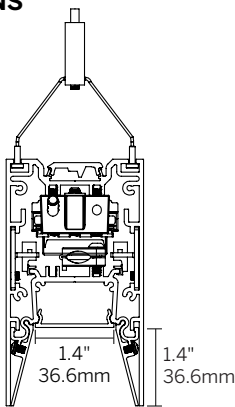


Recessed Micro-prismatic
Lens (RML)

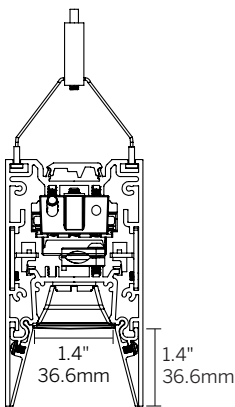


Recessed Louver
(RLW, RLB)

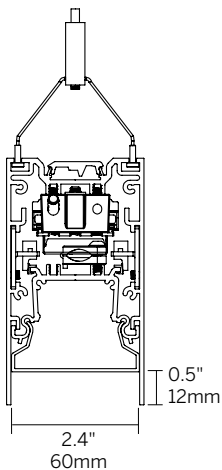

Regressed Opal Lens
(ROL)

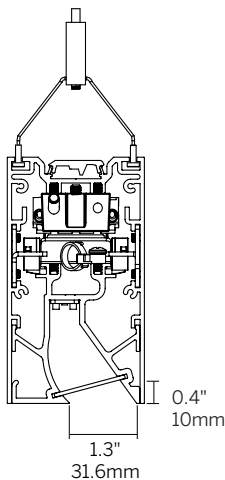

Recessed Lens + Wall Wash
(LML + WW)

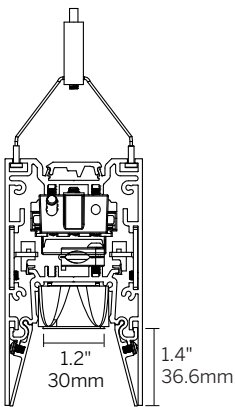


Recessed Narrow Optic
(RNO)

ProTools 60 Linear Direct / Indirect Suspended




FILLER PLATE STRAIGHT RUN / LOUVER

- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

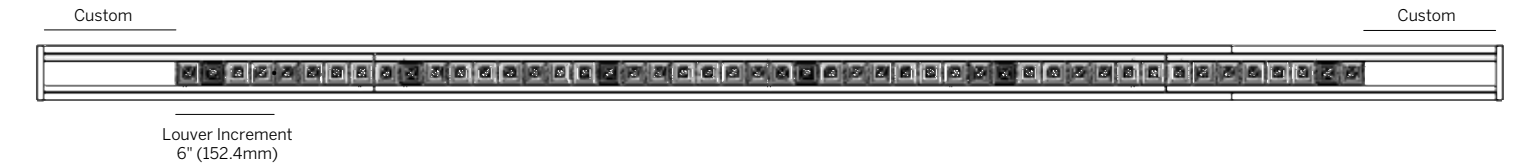

FILLER PLATE CORNER CONFIGURATION / LOUVER

- Corners will have a 2.5"x2.5" Corner Filler Plate, recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate has a maximum length of 3" and is recessed and finished to match the louver and minimize visual impact.

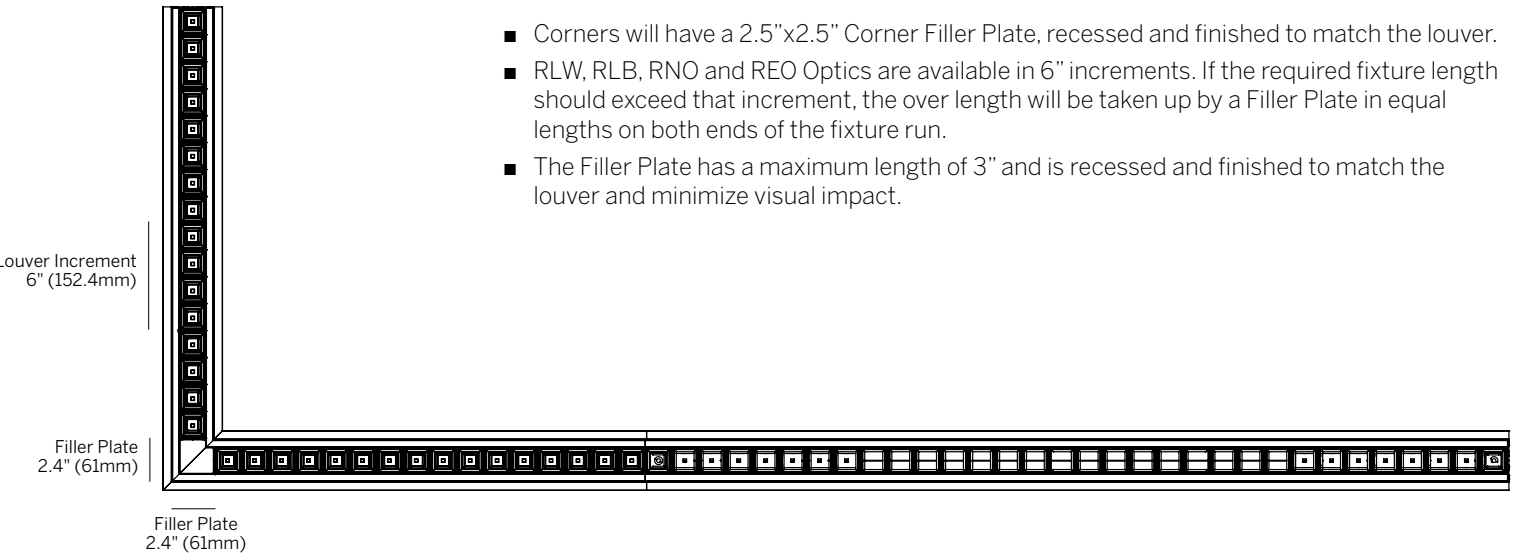

ProTools 60 Linear Direct / Indirect Suspended

inter•lux

FILLER PLATE MULTI-CORNER / LOUVER

- Corners will have a 2.4"x2.4" Corner Filler Plate recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

