



Overall Dimensions - Model 1036D (E26)

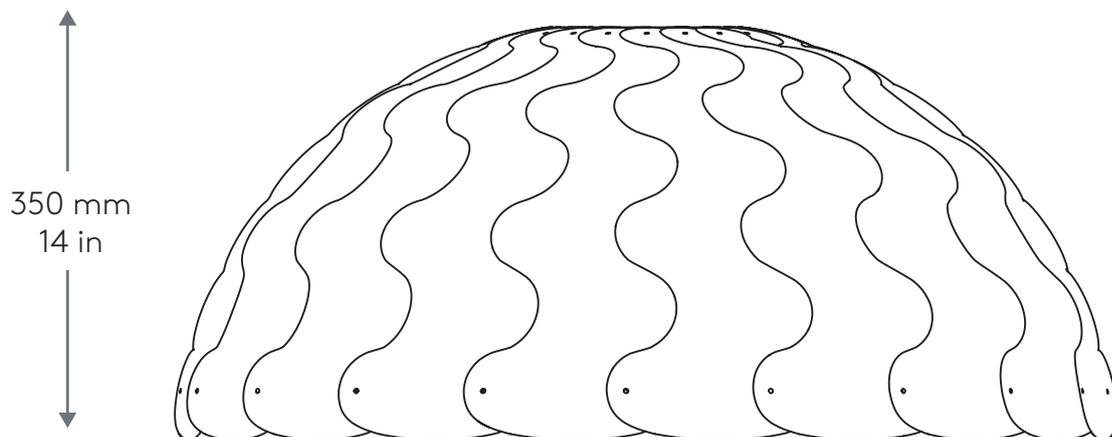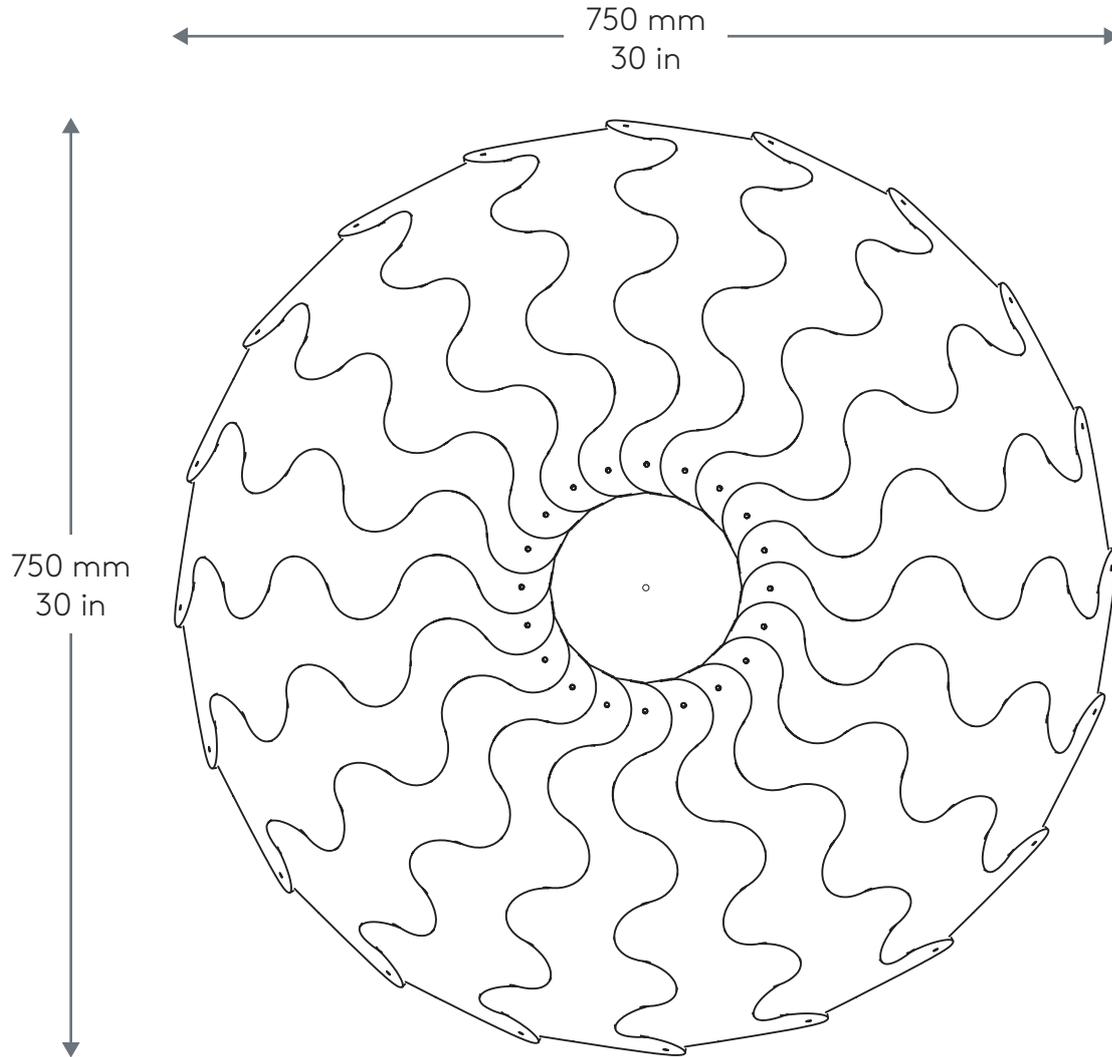


Contents (not to scale)

Please double check all components are present and quantities are correct before beginning assembly

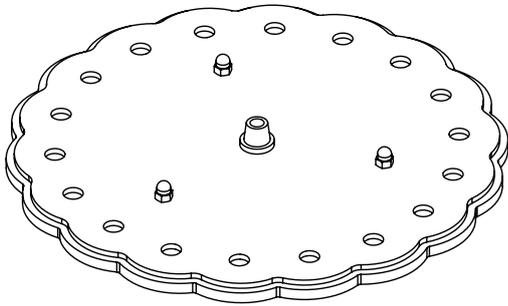

x1
Top Panel Assembly
(Power cable not shown)

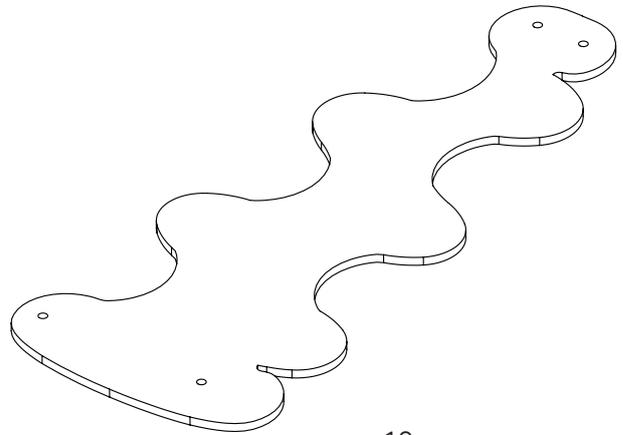

x18
Tapered
Felt Panels





x36 (+5)
Small Ratchet Rivets
(13mm / .5 in)



x36 (+5)
Large Ratchet Rivets
(19mm / .74in)


Step 1 - Top Panel Ratchet Rivet Assembly

Screw on x1 Cone Grippers
(without bases)
onto base
already attached to top
panel assembly

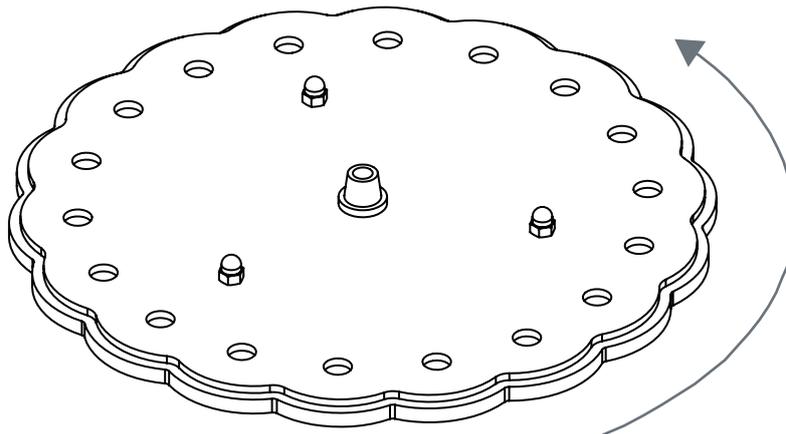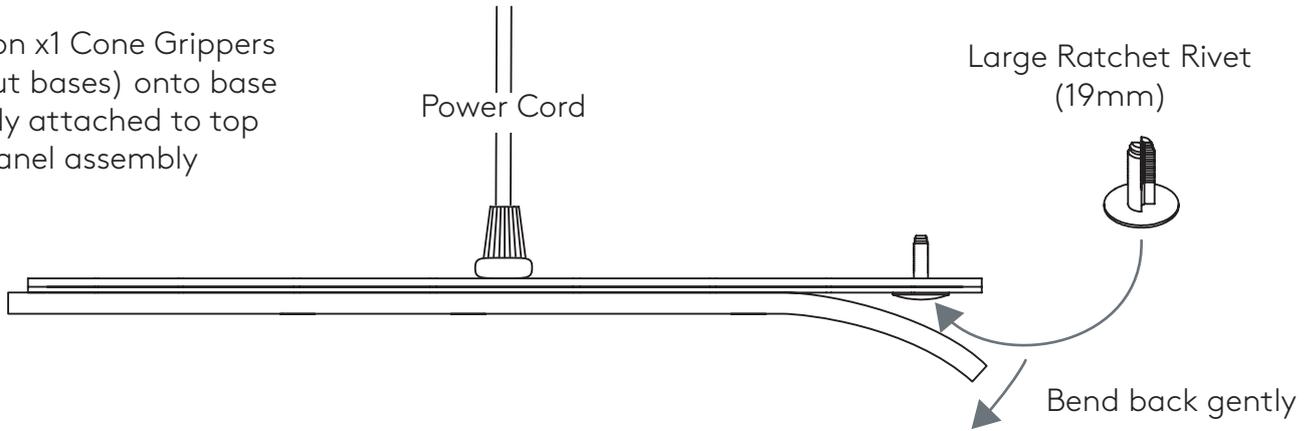


Insert Large Ratchet
Rivets (19mm) in all holes
around edge.

(power cord not shown)

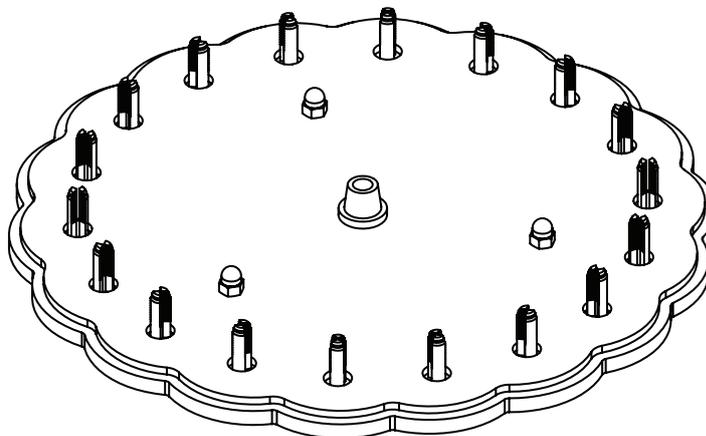


Step 2 - Pop out side panel plugs

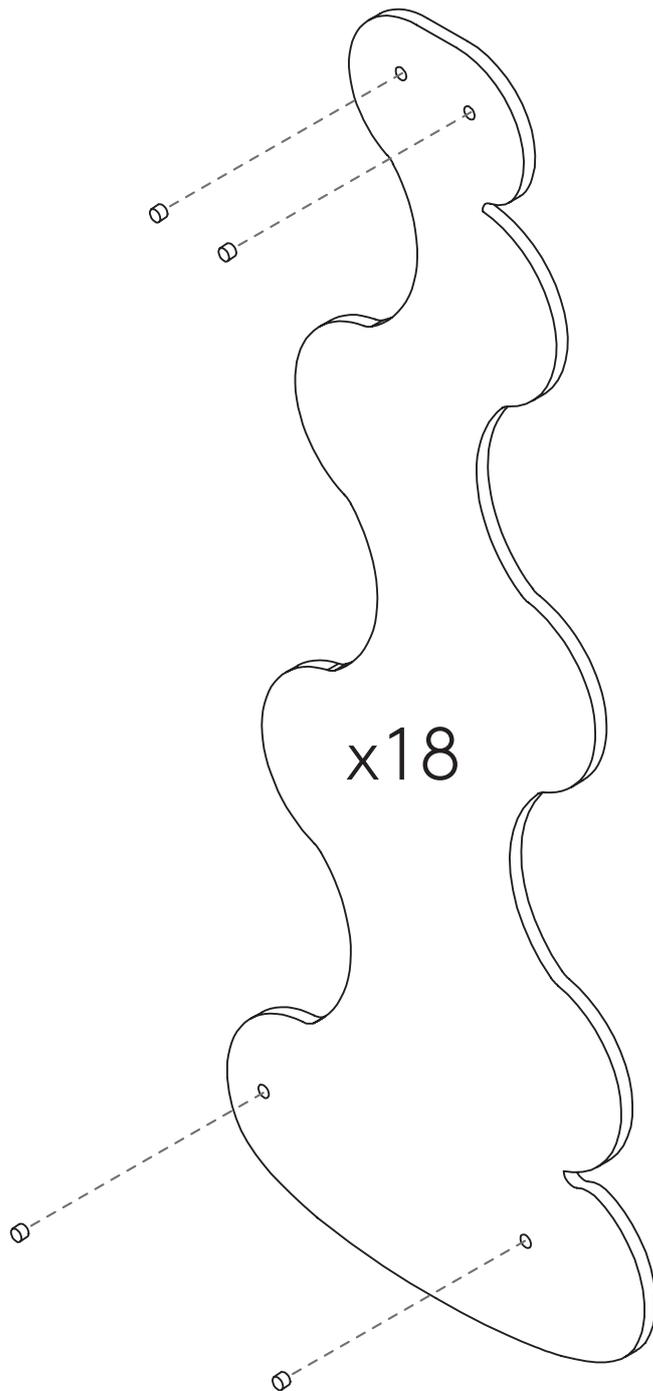


Push out the 4 plugs per panel to make way for the plastic clips.

Step 3 - Top Panel to Side Panel Assembly


Assemble on a large clean surface or on floor.

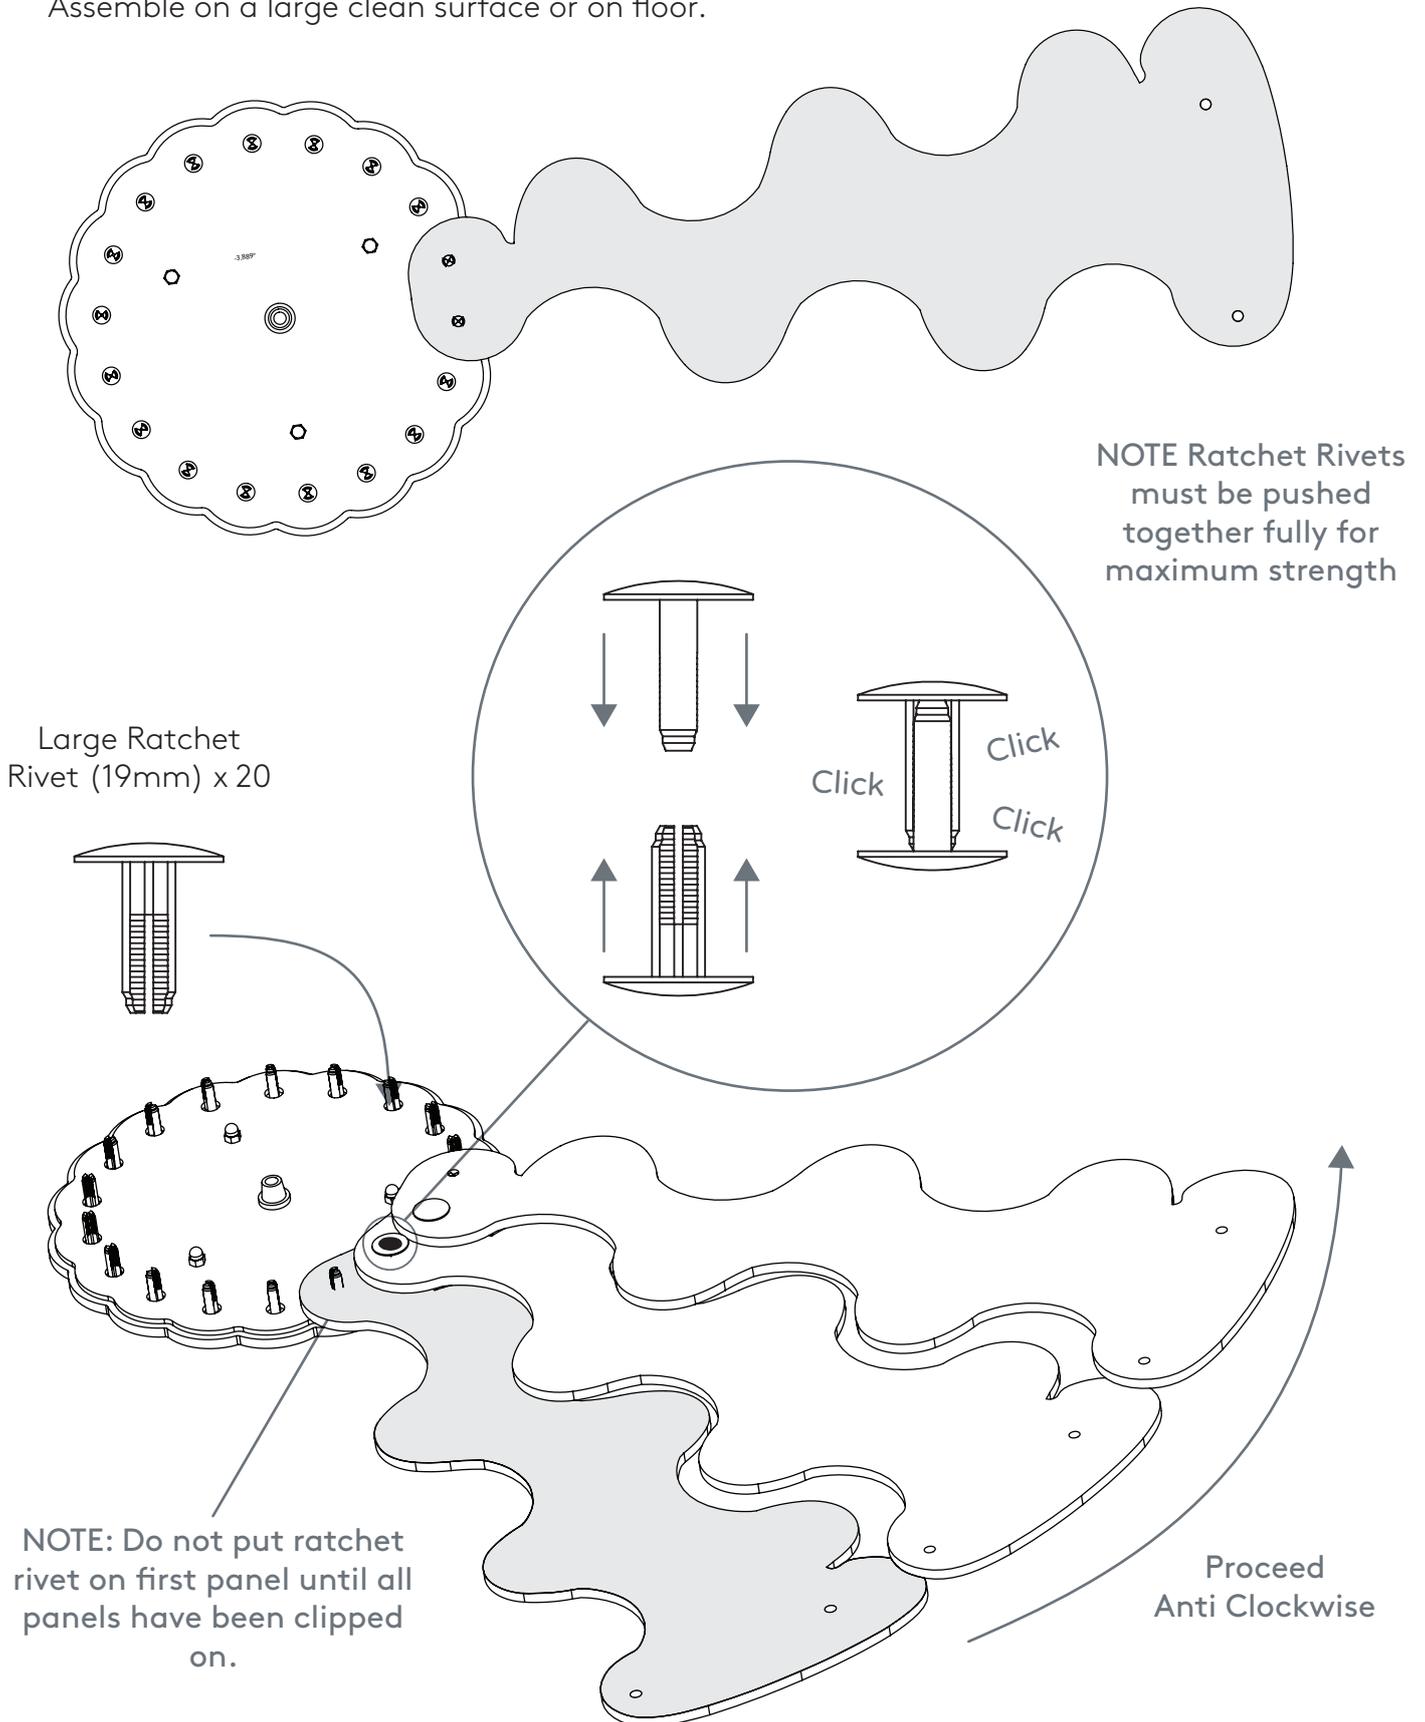

Step 4 - Top Panel to Side Panel Assembly Continued

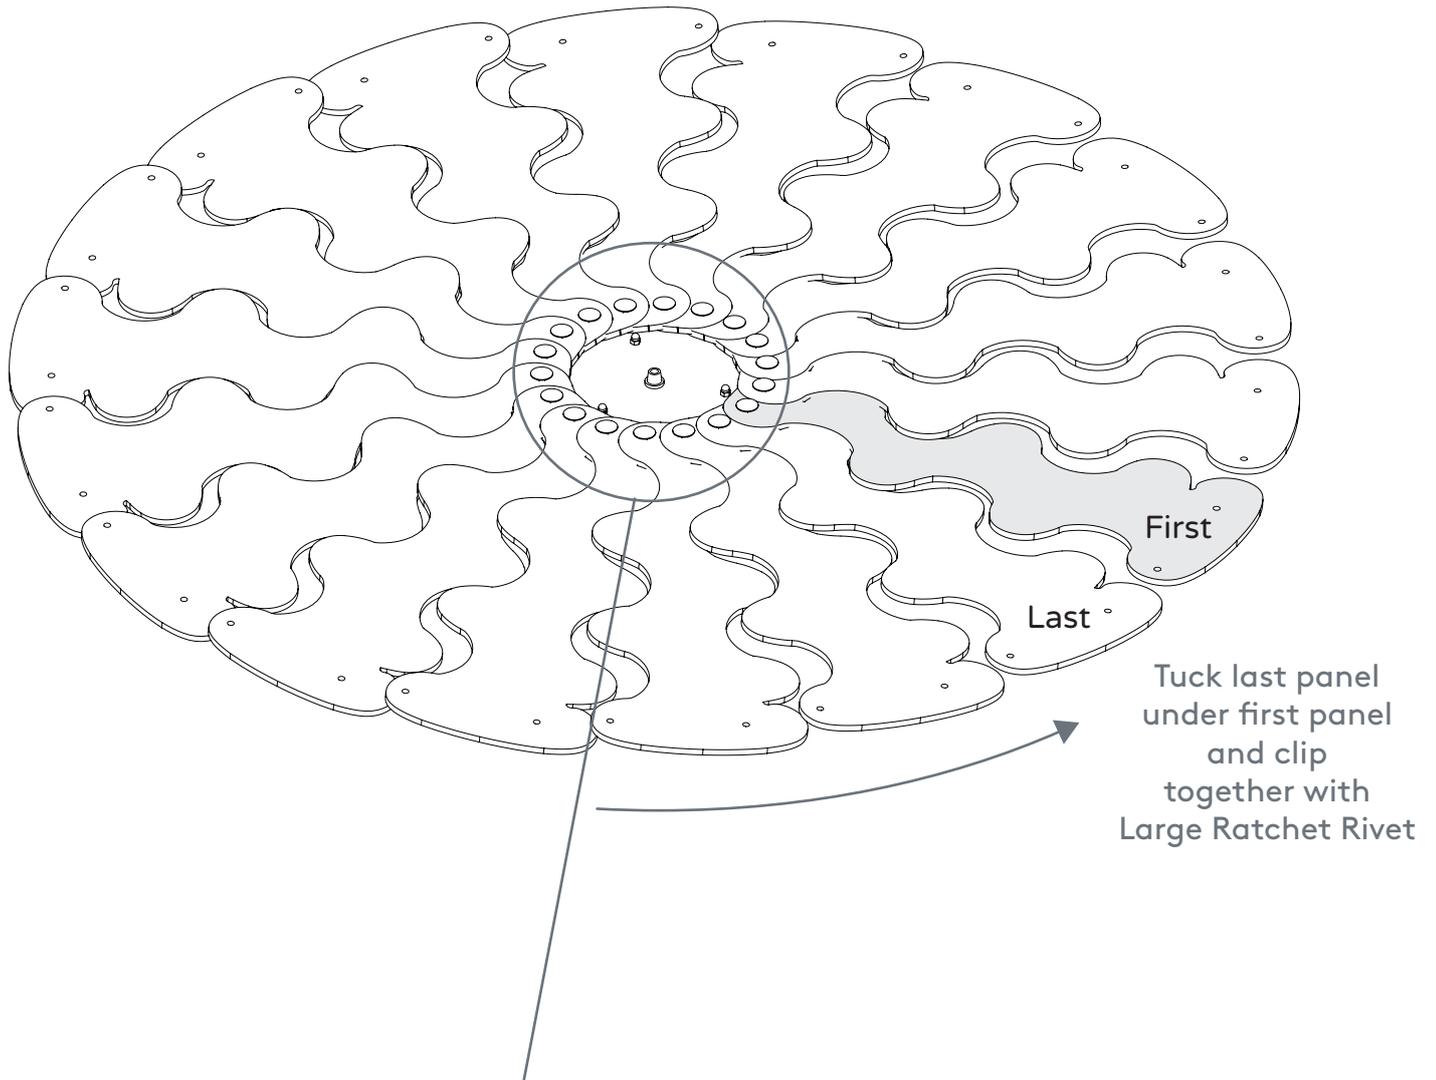


Cross Section Detail View of Top Panels overlapping.

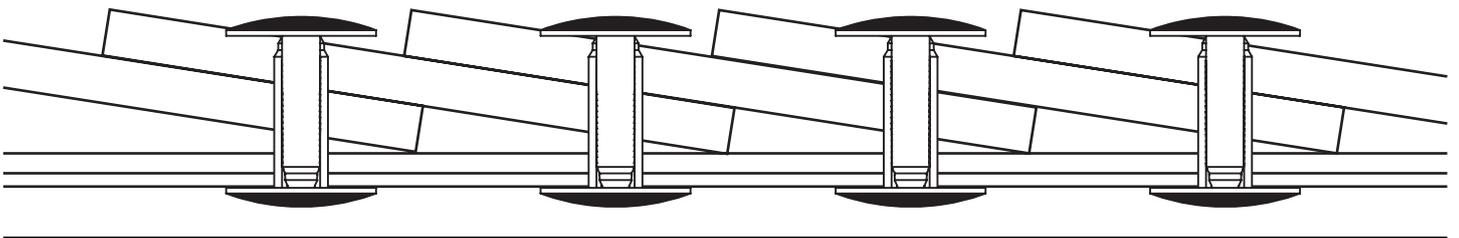


Step 5 - Lifting into shape

Use power cable to lift the Hush Micro approximately 400mm (16 in) from the floor/surface.

The panels will begin to fall into their natural shape.

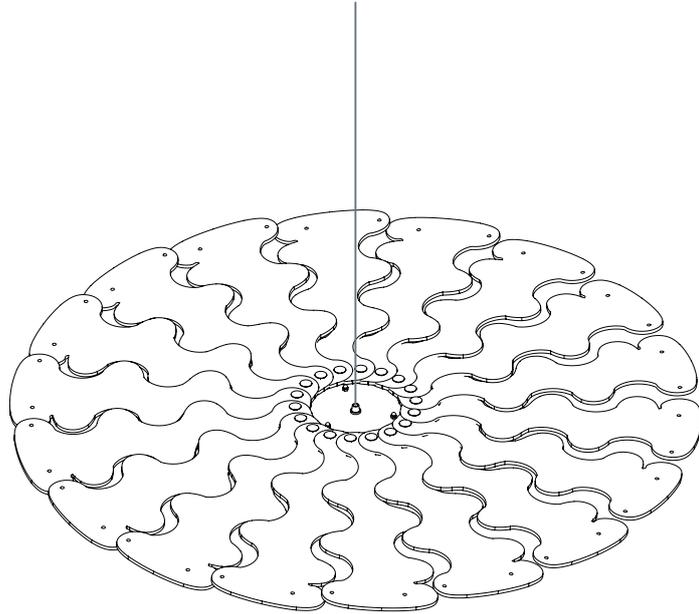


Use a small-sized table or stool to prop it up.

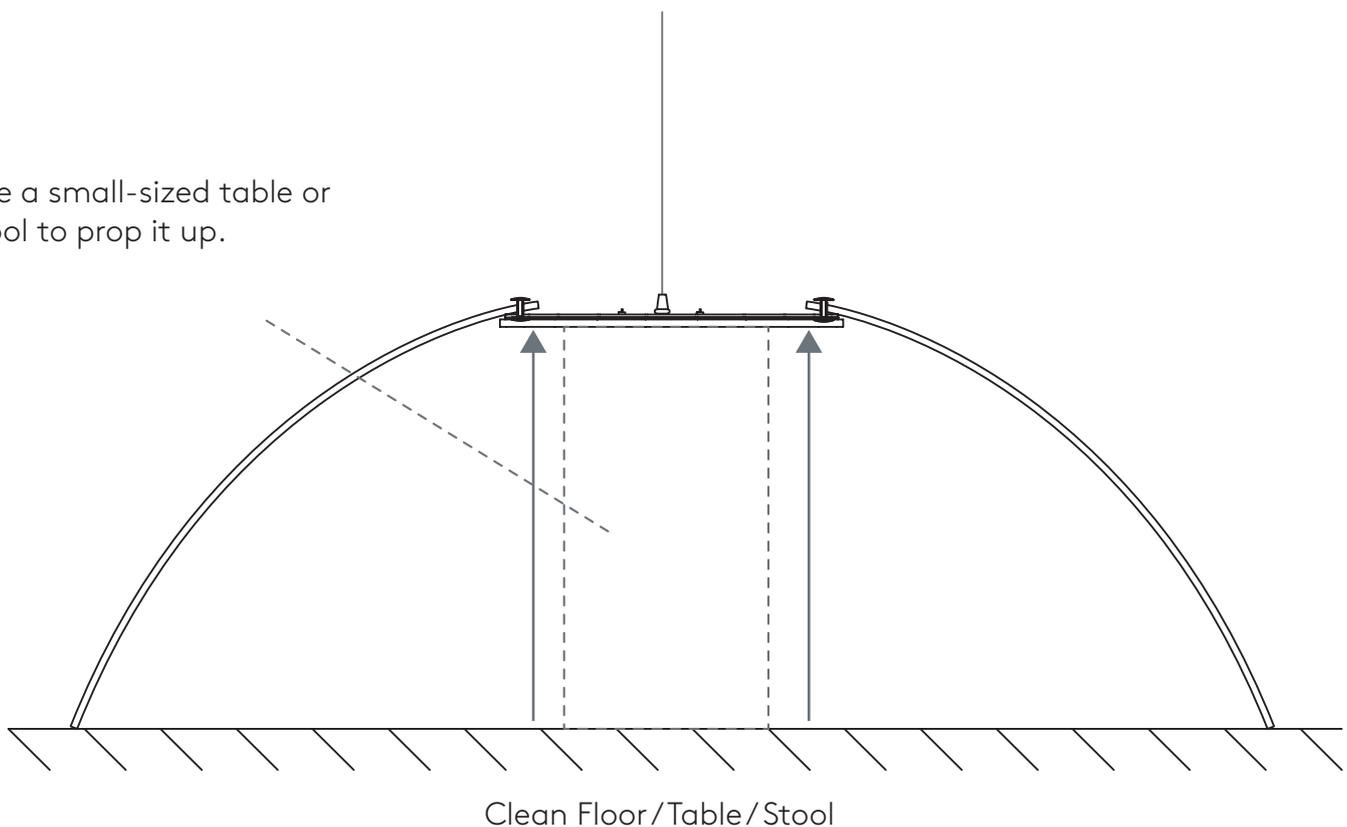


Step 6A - Weaving of Panels - Exploded Detail

Bold Lines indicate the 'Ear' that sits on the outside of the Hush Micro.
This weaving pattern is essential to lock the shape together

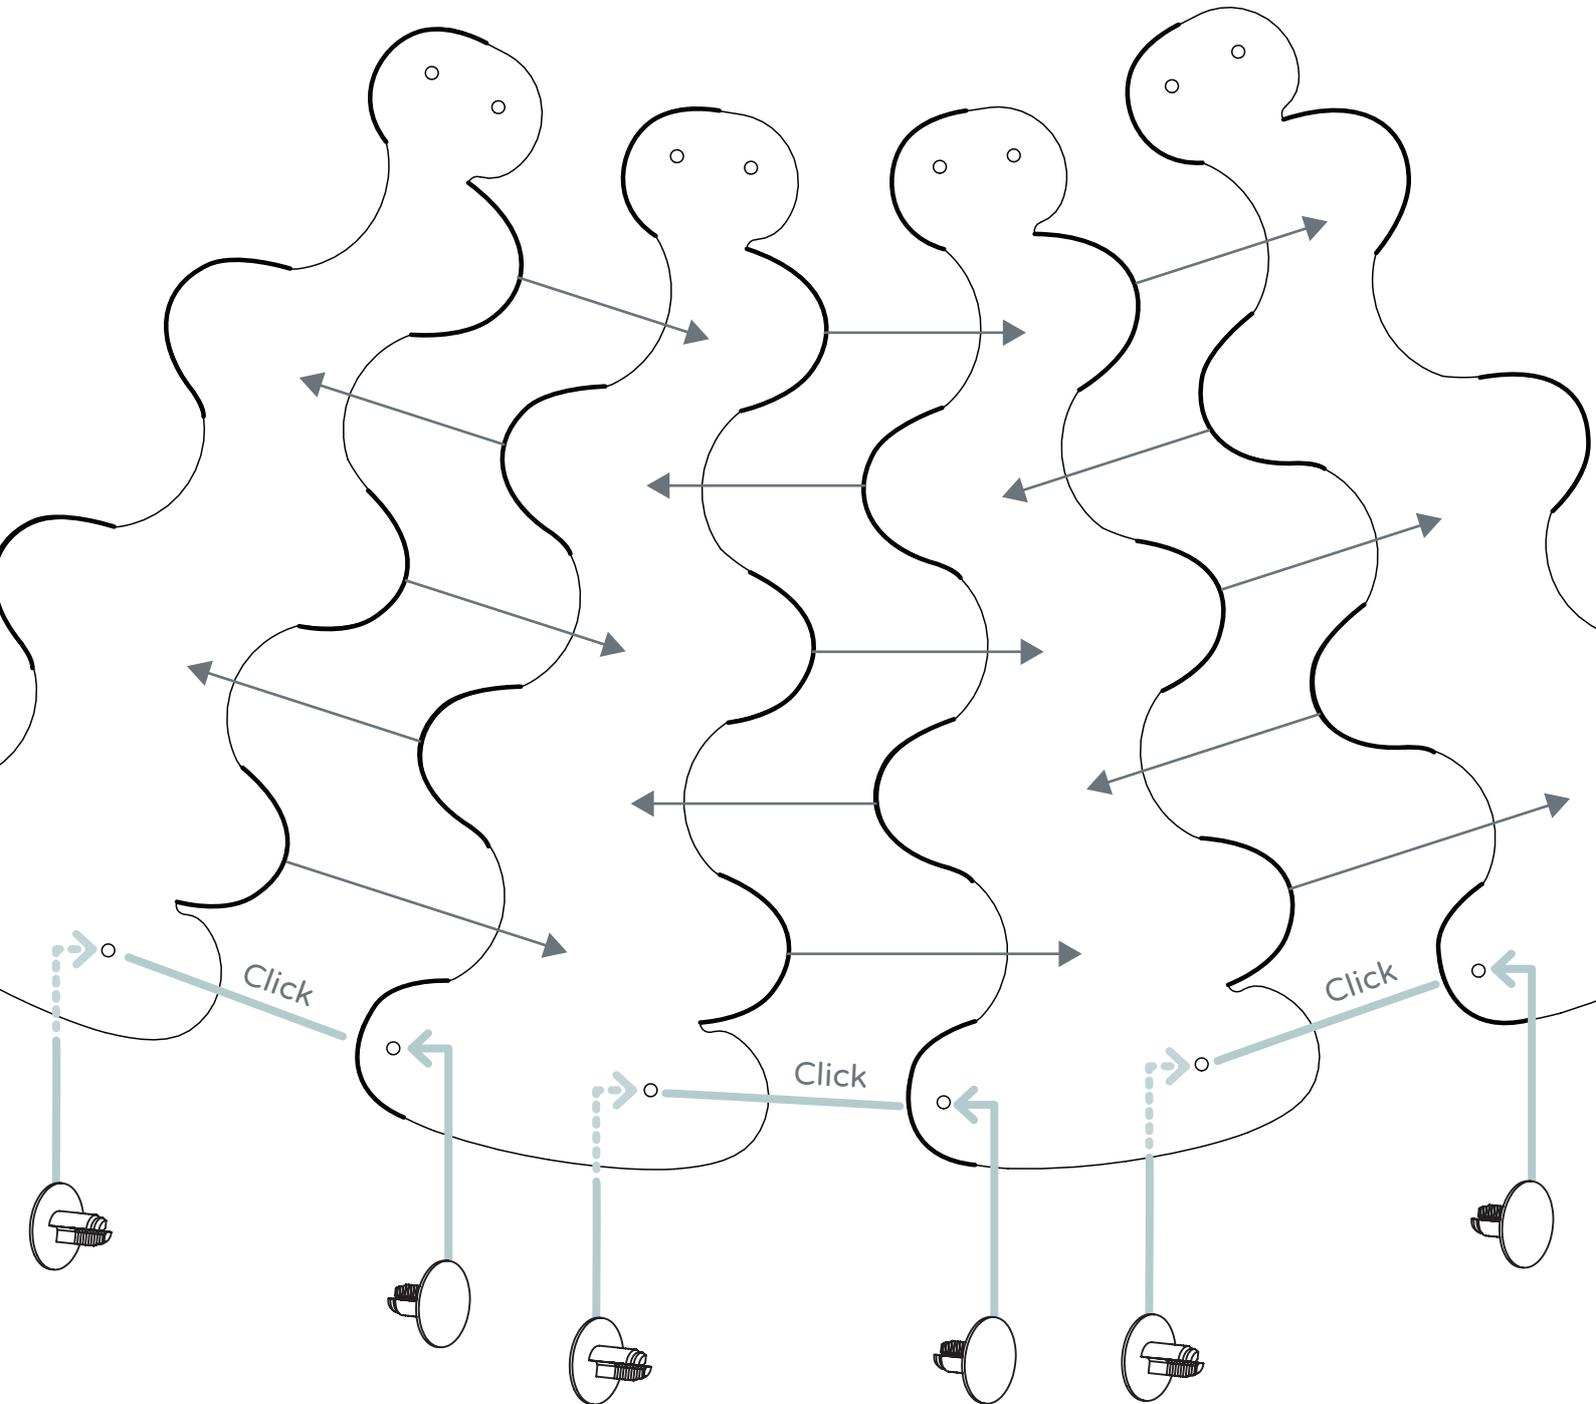


Once two panels are woven together, use two of the shorter Ratchet Rivets (13 mm) to lock them together.

Step 6A - Weaving of Panels - Finished Detail

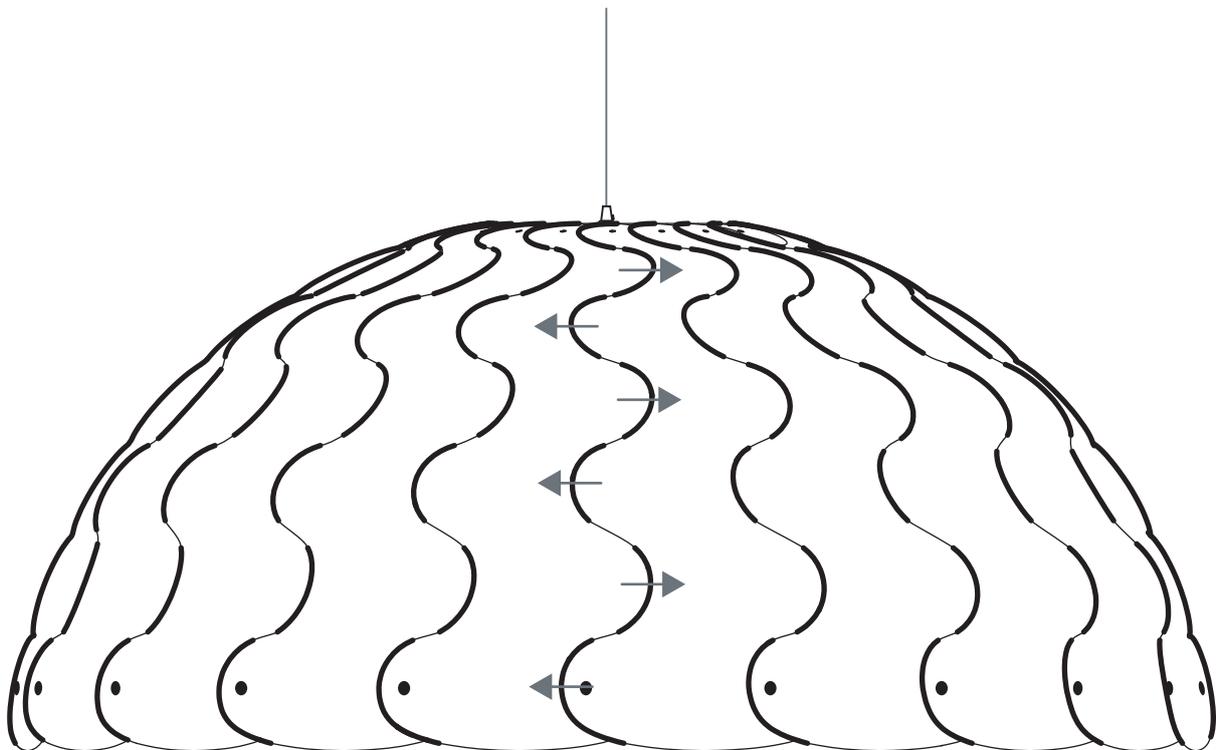

Bold Lines indicate the 'Ear' that sits on the outside of the Hush Micro.
This weaving pattern is essential to lock the shape together

Step 7 - Electrics with Hanging Ceiling

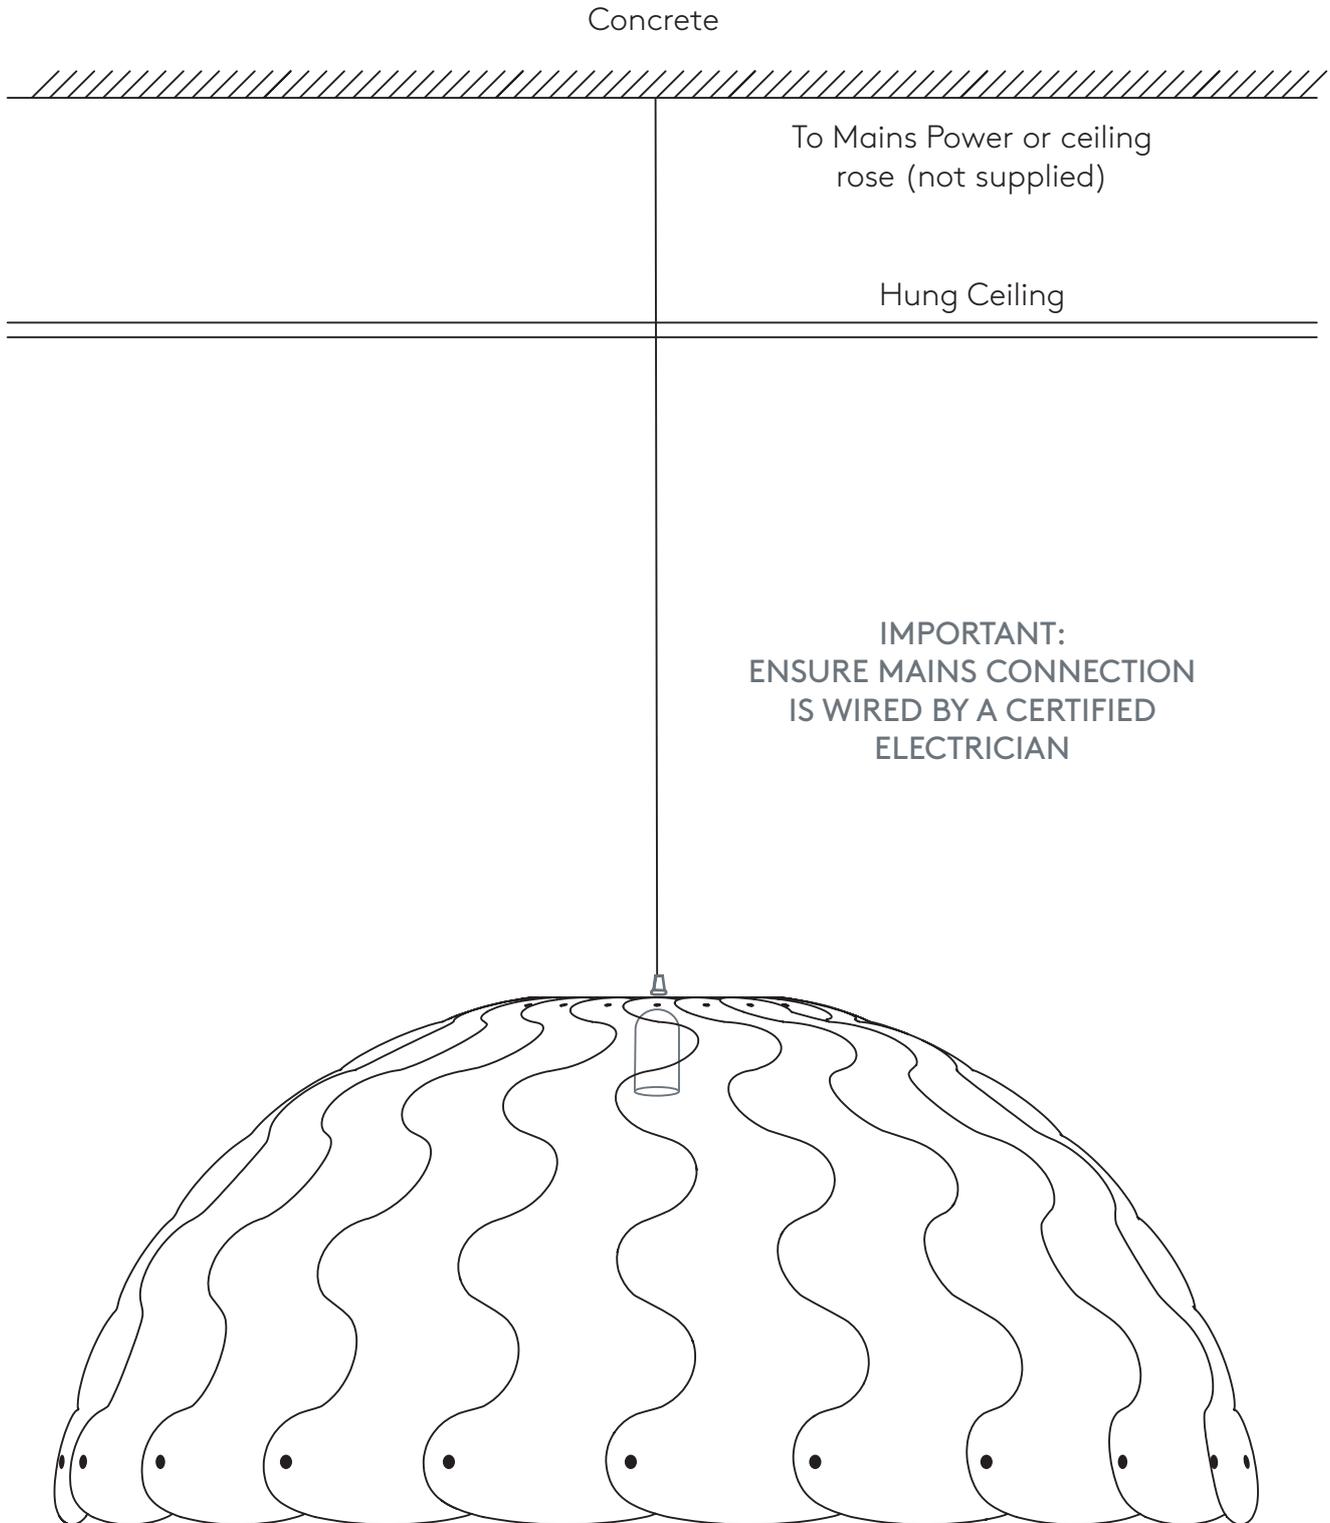

Appendix 1: Top Panel Sub Assembly

