

**IMPORTANT:** Fixture(s) must be wired in series! Refer to driver wiring document

Luminaires must be installed by a qualified electrician. Check with local and national codes for proper installation.



To prevent electrical shock disconnect electrical supply before installation or servicing.

**Never connect a live fixture!!!**

Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight. Provide blocking when necessary.

### Step 1 - **Open the Box**

Unpack luminaire unit.

### Step 2 - **Wall Preparation**

Mark location for single gang J-Box having 3.25" mounting distance between centers. Cut opening, mount, and pull power (and control cables) inside.

### Step 3 - **Wiring**

Inside J-Box, connect to power (and control) wire(s) using suitable connectors.

### Step 4 - **Mounting**

Secure cylinder mounting plate to J-Box with (2) Mounting Screws. Energize!

Mounting Screw (2)


Fixture Body

J-Box  
(by others)

Integral  
Mounting Plate

### Included in Box

- (1) Fixture Body with Integral Mounting Plate and connected cable
- (2) Mounting Screws

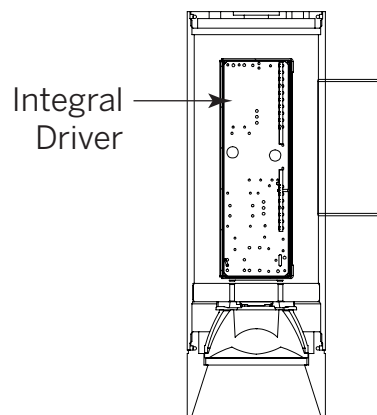

Cross-Section  
of Fixture

Need  
Help?