



Toad Type X

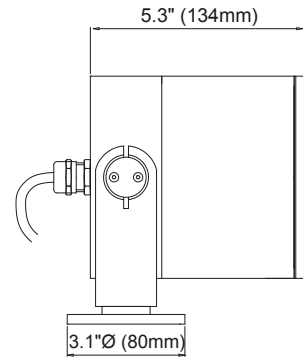

Fairly large surface mounted exterior spotlight with lockable pan and tilt (available tilt $\pm 90^\circ$)

- Materials: Aluminum
- Color Temp: 2700K, 3000K, 3500K or 4000K
- Lamp: Xicato XTM or XIM 9mm or 19mm LES LED module
- Output: Please see table below. *Vibrant Series only available for 3000K*
- CRI Ra: ≥ 80 or ≥ 95 Artist
- IP Rating: IP66
- Optics: 4.4"Ø (111mm) optics. Please refer to the table below for beam options, accessories and ordering information.
- Finish: White (Standard) Pure White RAL 9010 30% gloss
Black (Standard) Powdercoat Matte Black 5% gloss
Custom paint and anodized finishes available
- Dimming: XTM EldoLED 0-10V, DMX or Wallbox control
XIM 0-10V
- Supply: XTM Constant current remote driver
XIM 48V DC
- Locking: 2.5mm Allen key required
- Available tilt: $\pm 90^\circ$
- Weight: 5.3lb (2.4kg)

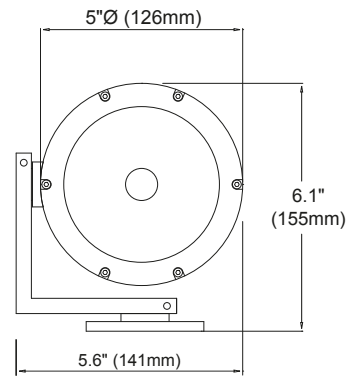

LED Information

This product uses the Xicato Module
Technical advantages of the Xicato Module:

- Color consistency Initial; 1 x 2 MacAdam ellipses
- Color consistency Maintained; 3 MacAdam ellipses
- Excellent color rendering
- Uniform beam
- No multiple shadowing

Order Code	series.col temp.module.lumen code.beam.finish.dimming
Example	Toad.X.3000K.V80.31°.RAL 9010.D010

Series	Color	Module Type	Lumen Code - Max output and CRI	Beam	Finish	Dimming and control	Lenses, Louvers and Accessories
Toad.X	2700K 3000K 3500K 4000K	XTM9...XTM 9mm LES	S82.....Standard Series 82 2000lm A95.....Artist Series 95 1560lm V80.....Vibrant Series V80 2000lm* V95.....Vibrant Series V95 1560lm*	08° 18° 31° 57°	white black custom	D010...Remote 0-10V DMX...DMX WBC...Wallbox control	SL.....Symmetrical spread lens TE.....Soft Elliptical spread lens PE.....Sharp Elliptical spread lens HL.....Honeycomb louver DL.....Dichroic lens
		XTM19...XTM 19mm LES	S82.....Standard Series 82 3850lm A95.....Artist Series 95 3000lm V80.....Vibrant Series V80 3850lm* V95.....Vibrant Series V95 3000lm*	14° 24° 43° 58°	white black custom		
		XIM9...XIM 9mm LES	S82.....Standard Series 82 2000lm A95.....Artist Series 95 1300lm V80.....Vibrant Series V80 2000lm* V95.....Vibrant Series V95 1300lm*	08° 18° 31° 57°	white black custom	D010...Remote 0-10V	
		XIM19...XIM 19mm LES	S82.....Standard Series 82 3000lm A95.....Artist Series 95 2000lm V80.....Vibrant Series V80 3000lm* V95.....Vibrant Series V95 2000lm*	14° 24° 43° 58°	white black custom		

Xicato Thermal Validation Program approved

