



**Orma Trim Flush Fixed | Up-Light | powerLED**



C.C. 4W DC - 350mA		Cct	lm S - D	Optic
Steel/Alu	<b>E81181</b>	<b>M</b> 2700	490 - 272	<b>15</b> Spot (22°)
		<b>W</b> 3000	490 - 272	<b>30</b> Flood (29°)
		<b>N</b> 4000	529 - 294	<b>60</b> W.Flood (48°)
				<b>25</b> Elliptical -

HC		Cct	lm S - D	Optic
Steel/Alu	<b>E81182</b>	<b>M</b> 2700	490 - 187	<b>15</b> Spot (20°)
		<b>W</b> 3000	490 - 187	<b>30</b> Flood (25°)
		<b>N</b> 4000	529 - 202	<b>60</b> Flood (37°)

DL		Cct	lm S - D	Optic
Steel/Alu	<b>E81183</b>	<b>M</b> 2700	490 - 194	<b>15</b> Spot (22°)
		<b>W</b> 3000	490 - 194	<b>30</b> Flood (30°)
		<b>N</b> 4000	529 - 209	<b>60</b> W.Flood (55°)

**Power supply options (remote only)**

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures





C.V. 5W DC - 24 VDC		Cct	lm S - D	Optic
Steel/Alu	<b>E81184</b>	<b>M</b> 2700	490 - 272	<b>15</b> Spot (22°)
		<b>W</b> 3000	490 - 272	<b>30</b> Flood (29°)
		<b>N</b> 4000	529 - 294	<b>60</b> W.Flood (48°)
				<b>25</b> Elliptical -

HC		Cct	lm S - D	Optic
Steel/Alu	<b>E81185</b>	<b>M</b> 2700	490 - 187	<b>15</b> Spot (20°)
		<b>W</b> 3000	490 - 187	<b>30</b> Flood (25°)
		<b>N</b> 4000	529 - 202	<b>60</b> Flood (37°)

DL		Cct	lm S - D	Optic
Steel/Alu	<b>E81186</b>	<b>M</b> 2700	490 - 194	<b>15</b> Spot (22°)
		<b>W</b> 3000	490 - 194	<b>30</b> Flood (30°)
		<b>N</b> 4000	529 - 209	<b>60</b> W.Flood (55°)



**Power supply options (remote only)**

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

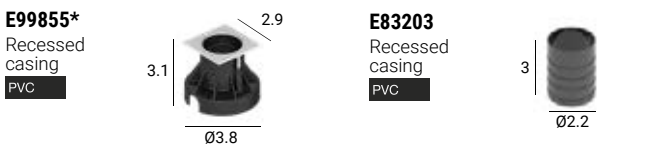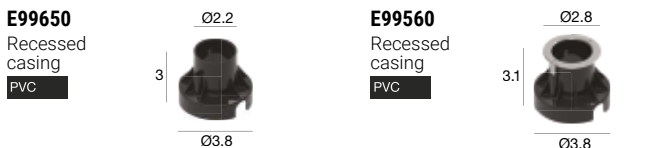

**RTG E81181W15 / E81181W30**

**Orma Trim Flush Fixed | Up-Light | arrayLED**



C.C. - 8W DC - 220 mA		Cct	lm S - D	Optic
Steel/Alu	<b>E81187</b>	<b>M</b> 2700	1080 - 858	<b>15</b> Spot (15°)
		<b>W</b> 3000	1126 - 894	<b>30</b> Flood (31°)
		<b>N</b> 4000	1188 - 944	<b>60</b> W.Flood (61°)

HC		Cct	lm S - D	Optic
Steel/Alu	<b>E81188</b>	<b>M</b> 2700	1080 - 619	<b>15</b> Spot (15°)
		<b>W</b> 3000	1126 - 646	<b>30</b> Flood (27°)
		<b>N</b> 4000	1188 - 681	<b>60</b> W.Flood (49°)

DL		Cct	lm S - D	Optic
Steel/Alu	<b>81189</b>	<b>M</b> 2700	1080 - 576	<b>15</b> Spot (16°)
		<b>W</b> 3000	1126 - 600	<b>30</b> Flood (29°)
		<b>N</b> 4000	1188 - 634	<b>60</b> W.Flood (53°)

**Power supply options (remote only)**

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC		Cct	lm S - D	Optic
Steel/Alu	<b>E81190</b>	<b>M</b> 2700	1193 - 955	<b>15</b> Spot (15°)
		<b>W</b> 3000	1244 - 997	<b>30</b> Flood (31°)
		<b>N</b> 4000	1313 - 1052	<b>60</b> W.Flood (61°)

HC		Cct	lm S - D	Optic
Steel/Alu	<b>E81191</b>	<b>M</b> 2700	1193 - 687	<b>15</b> Spot (15°)
		<b>W</b> 3000	1244 - 716	<b>30</b> Flood (27°)
		<b>N</b> 4000	1313 - 756	<b>60</b> W.Flood (49°)



DL		Cct	lm S - D	Optic
Steel/Alu	<b>E81192</b>	<b>M</b> 2700	1193 - 639	<b>15</b> Spot (16°)
		<b>W</b> 3000	1244 - 667	<b>30</b> Flood (29°)
		<b>N</b> 4000	1313 - 704	<b>60</b> W.Flood (53°)

**Power supply options (remote only)**

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

\*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush\*.  
 Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).  
 Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.  
 NOT suitable for submersible installations.  
 Inter-lux reserves the right to make technical changes without notice.





**Orma Trim Flush Fixed RGBW | Up-Light | arrayLED**



RGBW - 8W DC - 630 mA	Cct	Optic
Steel/Alu <b>E81322</b>	<b>Q</b> RGBW natural white	<b>06</b> N.Spot -
	<b>V</b> RGBW warm white	<b>15</b> Spot -
		<b>45</b> W.Flood -
		<b>00</b> General -



**Power supply options (remote only)**

EC030W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures



**RTG E81187W30**

**Orma Trim Flush Fixed | Up-Light | arrayLED**





C.C. 12W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu <b>E81193</b>	<b>M</b> 2700	1724 - 1379	<b>15</b> Spot (14°)
	<b>W</b> 3000	1724 - 1379	<b>30</b> Flood (31°)
	<b>N</b> 4000	1854 - 1485	<b>60</b> W.Flood (60°)

HC	Cct	Im S - D	Optic
Steel/Alu <b>E81194</b>	<b>M</b> 2700	1724 - 981	<b>15</b> Spot (14°)
	<b>W</b> 3000	1724 - 981	<b>30</b> Flood (28°)
	<b>N</b> 4000	1854 - 1055	<b>60</b> W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel/Alu <b>E81195</b>	<b>M</b> 2700	1724 - 1094	<b>15</b> Spot (14°)
	<b>W</b> 3000	1724 - 1094	<b>30</b> Flood (30°)
	<b>N</b> 4000	1854 - 1178	<b>60</b> W.Flood (52°)

**Power supply options (remote only)**

EC030W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECODrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures



\*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush\*.  
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).  
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.  
NOT suitable for submersible installations.  
Inter-lux reserves the right to make technical changes without notice.