


20 Linear Recessed Regressed

- Miniature, recessed linear downlight with regressed lens for low brightness.
- Trimless and bezel trim for seamless integration into any drywall, wood and metal surfaces.
- Straight runs and configurations with factory corners in exact lengths as specified.
- Multiple distribution options.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.

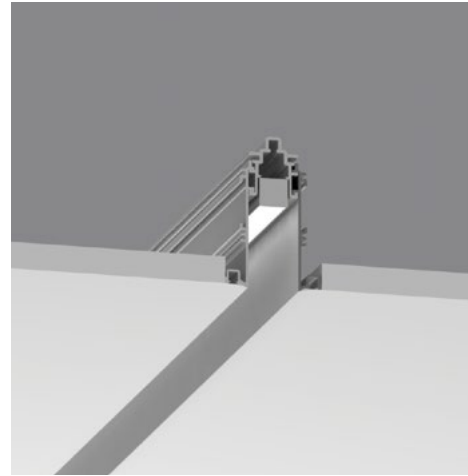

Recessed Plaster Trim (RPT)

Housing Precision extruded aluminum for true dimensions and tolerances

Integration into any ceiling type
All low voltage connections made in the housing
Luminaires snaps into the housing without tools
Finishes: white, black, silver and custom

Integration Fixation into gypsum, hard ceilings and all grid ceiling types

Distribution Multiple lenses and louvers for general, accent, decorative and grazing applications

LED Constant Voltage, 90+ CRI, 3 Steps MacAdam
120 nominal lumens/watt average (see spec sheet for delivered lumens)
Conformal coated for protection against humidity optional (-WL)
Warm Dim to emulate incandescent when dimming; 75 nominal lumens per watt average
RGBW for color changing applications; 50 nominal lumens per watt average
L70 (TM21 Projected 85C) Static White = 60,000 hours
RGBW = 50,000 hours, WD = 36,000 hours

Lens OD - Opal Diffuser provides even, continuous line of light and general illumination
SD - Satin Clear Diffuser provides high efficiency soft edge beam, general illumination
MPL - Micro-prismatic lens provides lower brightness, general illumination
NL16 - Narrow Lens optic provides narrow beam for wall grazing applications
LL45 - 45 Degree Louver in white, black and satin provides extreme low brightness

Driver Compatible with quality constant voltage drivers

Weight 2lbs per foot


Operating Temp Suitable for operation in maximum ambient temperature of 35C (95F)

Warranty 5-year Limited (see complete company warranty information)

Certifications ETL and ETL-C for dry and damp location, CE

Voltages 24V Fixture / 120-277VAC Driver (remote)

Lenses/Accessories



20 Linear Recessed Regressed

Model	Fixation	Pattern	Length	Power ²	CRI/ CCT ³	Driver ⁴	Lens	Finish ⁶	Options
WG-20LRR	RPT RBT RRT RGT9 RGT15	S P ¹ PZ ¹	A A x B A x B x C A x B x A x B	L M H	927 930 935 940 WD RGBW	X S D010 L3DAE L3DOE EL96 DMX	OD (std) SD MPL NL16 LL45B ⁵ LL45W ⁵ LL45S ⁵	W (std) B S F	BEC FEC PEC EM WL ⁷

Model

- WG-20LRR = 20 Linear Recessed Regressed

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed bezel trim
- RRT = Recessed return trim
- RGT9 = Recessed grid trim 9/16"
- RGT15 = Recessed grid trim 15/16"

Pattern¹

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")
For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)
- For 2 and 4 foot fixtures to fit ceiling grids specify 24" and 48" lengths

Power²

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)

CRI/CCT (90+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 - 3000K
- RGBW = 3000K White (M power only)

Driver (remote)⁴

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming
- DMX = Osram / EldoLED, 24V, 0.1% DMX Dimming

Lens


- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser
- MPL = Micro-prismatic lens
- NL16 = Linear narrow lens, 16°
- LL45B = Linear louver black⁵
- LL45W = Linear louver white⁵
- LL45S = Linear louver satin⁵

Finish⁶

- W = White, 15% gloss, RAL 9010 / Tiger Drylac 009/10120 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL


Options

- BEC = Bezel end caps
- FEC = Flat end caps
- PEC = Plaster-in end caps
- EM = Emergency (remote)
- WL = Wet Location Under Canopy / Cover⁷

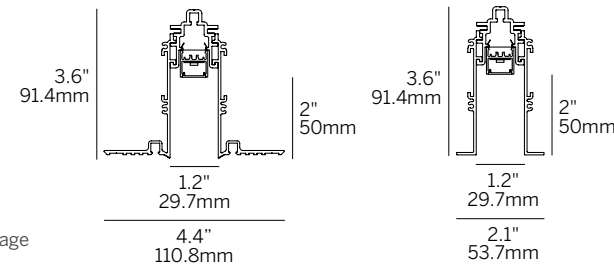


Recessed Plaster Trim (RPT)

Recessed Bezel Trim (RBT)
Recessed Grid Trim (RGT9/
RGT15)



Recessed Return Trim (RRT)



technical
information

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 See pattern spec sheet.
- 2 Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- 3 Refer to specsheet for delivered lumen data for all product configurations.
- 4 Remote power supply required. See power supply page for details.
- 5 Louver available in 4.75" increments.
- 6 See Tiger Drylac color chart: inter-lux.com/tiger
- 7 Wet Location option available for OD / SD / MPL lenses and recessed / surface ceiling applications only.

