



Luminaire

- Very shallow depth for continuous mounting to any desired length (1/4" increments), as well as standard grid multiples.
- Multiple lenses and louvers for general, accent, decorative and grazing applications
- Remote driver options.
- Lengths and angles factory-cut to exact field dimensions.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- L70 (TM21 Projected 85C) Static White 60,000 hours, RGBW 50,000 hours, WD 36,000 hours.
- ETL and ETL-C for dry and damp location.

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory
- PPI = Pattern, Plane to Plane, Inside. 2-3-4 sided pattern with inside corners
- PPO = Pattern, Plane to Plane, Outside. 2-3-4 sided pattern with outside corners
- PI = Pattern Inside, 2-3-4 sided pattern with inside corners
- PO = Pattern Outside, 2-3-4 sided pattern with outside corners

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")
- For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)


CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 - 3000K
- RGBW = 3000K White

Optics


- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser
- MPL = Micro-prismatic lens
- NL16 = Linear narrow lens, 16°
- LL45B = Linear louver black
- LL45W = Linear louver white
- LL45S = Linear louver satin
- BDO = Block diffuser opal
- BDC = Block diffuser clear
- ROD = Round opal diffuser

20 Linear Sample Case Guide

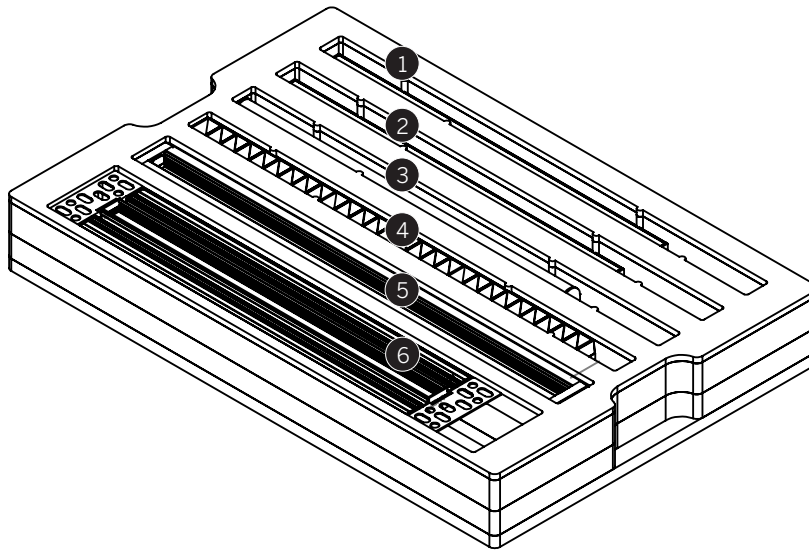


1. 20 Linear Surface Micro-prismatic Lens

WG-20LDL-SM-...-M-930-...-MPL-W

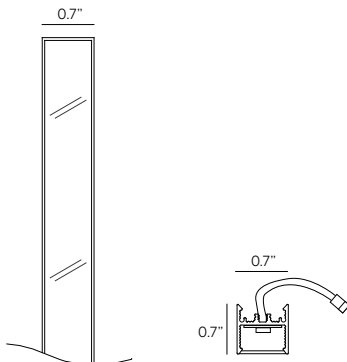


2. 20 Linear Surface Block Diffuser

WG-20LDL-SM-...-M-940-...-BDO-W




3. 20 Linear Surface Linear Narrow Lens, 16°

WG-20LDL-SM-...-M-927-...-NL16-W




4. 20 Linear Surface Linear Louver Black

WG-20LDL-SM-...-M-935-...-LL45B-W




5. 20 Linear Recessed Bezel Trim Satin Opal Diffuser

WG-20LDL-RBT-...-M-935-...-OD-W




6. 20 Linear Plaster Trim Satin Opal Diffuser

WG-20LDL-RPT-...-M-935-...-OD-W




20 Linear Sample Case Guide

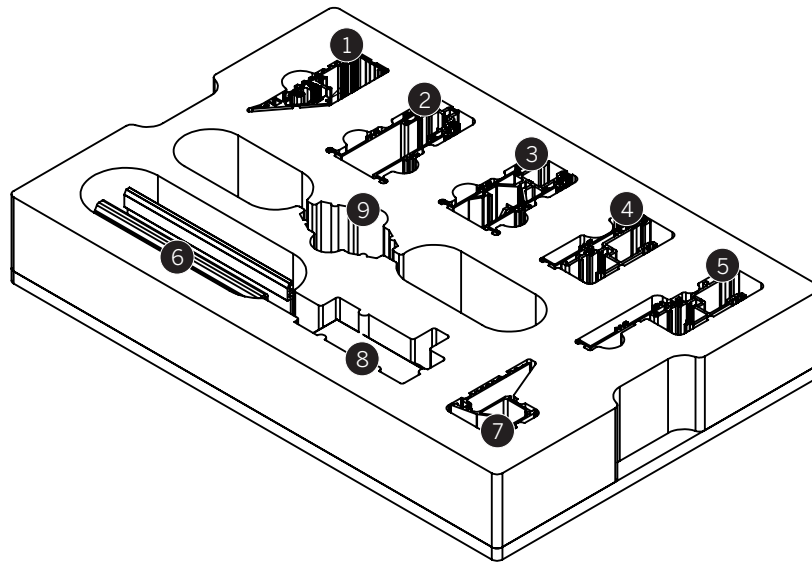


1. 20 Linear Mini Edgeless Cove

WG-20MEC-RPT-...




2. 20 Linear Recessed Regressed

WG-20LRR-RBT/RGT-...




3. 20 Linear Recessed Flush

WG-20LRF-RBT/RGT-...




4. 20 Linear Perimeter Flush

WG-20LPF-RBT/RGT-...




5. 20 Linear Perimeter Regressed and Wallgraze

WG-20LPR-RBT/RGT-...




6. 20 Linear Perimeter Regressed and Wallgraze SG Soft Graze

WG-20LPRSG-RBT/RGT-...




7. 20 Linear Mini Z Cove

WG-20MZC

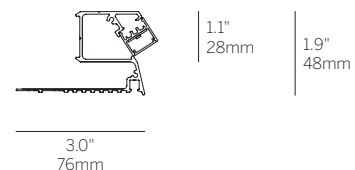


8. Plug-in Dimmer

9. Plug-in Driver

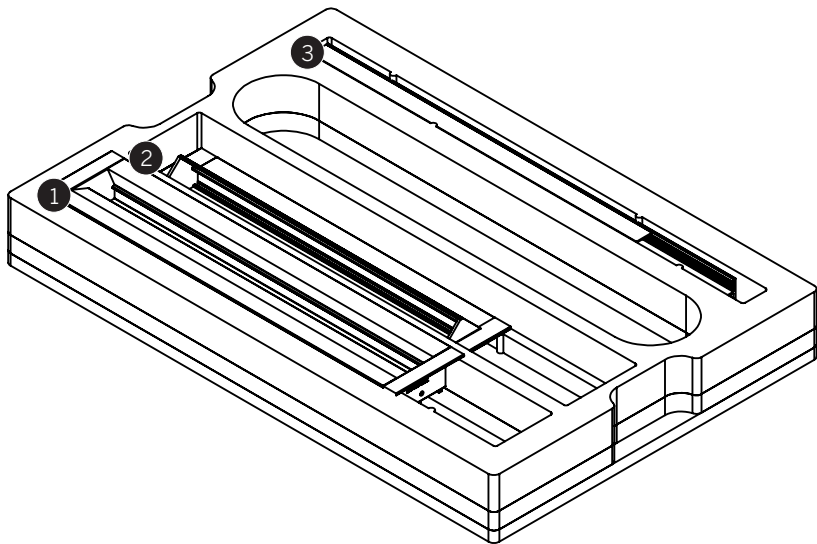


1. 20 Linear Wash Light
Recessed

WG-20LWW-RBT/RGT-...-M-935-...-OD-W



2. 20 Linear Wash Light
Semi-Recessed

WG-20LWW-SRBT/SRGT-...-M-935-...-OD-W



3. 20 Linear Direct/Indirect
Surface Wall Mount

WG-20LDI-SW-...-M-935-...-OD-...-OD-W

